



# Range Customer Handbook



Approved for public release;  
Distribution is unlimited;  
OPSEC review conducted on Dec 2009



US Army  
White Sands Missile Range  
Range Customer Handbook 2010  
WSMR Business Development Office  
TeamWhiteSands@us.army.mil  
www.wsmr.army.mil  
866-532-9767

# Contents



---

## **Chapter One: Introduction to the Range**

Contact Information	2
Program Portfolio	3
Overview of the Range	5
Mission Statement	6
Land, Airspace, and Geographical Infrastructure	6
Range Organizational Structure	9

## **Chapter Two: Interfacing with the Range**

Doing Business with the Range	12
Sponsor Organizations	13

## **Chapter Three: Mission Planning on the Range**

Universal Documentation System	18
Range Policy	18
Environmental Considerations Policy	19
Safety Policy	20
Range Operations Mission Scheduling Policy	22
Frequency Utilization and Management Policy	26
Airspace Policy	26
Resource Management Policy	27
Financial Systems	27

## **Chapter Four:** **Mission Execution on the Range**

Data Collection Systems	32
Telemetry Instrumentation	32
Radar Instrumentation	33
Transponder Instrumentation	34
Global Positioning Systems Instrumentation	34
Timing Instrumentation	34
Optical Instrumentation	34
Meteorology Instrumentation	35
Mobile Range Instrumentation	36
Army Aviation Instrumentation	37
Target Control Instrumentation	37
Data Distribution Systems	38
Netcentric Communications	38
Telephonic Communications	39
Radio Communications	39
Network Communications	40
Frequency Utilization and Management Communications	40
Data Analysis Systems	41
Reliability, Availability and Maintainability (RAM)	41
Manpower and Personnel Integration (MANPRINT)	41
Human Factors Engineering (HFE)	41
Warheads	42
Post Test Data Reduction	42
Visual Information Products	43
Facilities and Laboratories	43
Nuclear Weapons Effects	43
Electromagnetic Environment Effects	44
Directed Energy Weapons Effects	46
Space Effects	47
High Power Microwave Electromagnetic Environment Effects	47
Life Cycle Management	48
Applied Environments	48
Climatic Test Facilities	48
Dynamic Test Facilities	49
Aerial Cable Facilities	50
Metallurgy Laboratory	50
Chemistry Laboratory	51

Team White Sands Missile Range (Team WSMR)	53
Port Hueneme Divn Naval Surface Warfare Center Detachment White Sands (PHDNSWC-WS)	53
Air Force 46 <sup>th</sup> Test Group Detachment 1 (DET 1, 46 <sup>th</sup> TG)	55
Program Executive Office Integration (PEO-I) Army Brigade Combat Team (BCT) Modernization	57
National Aeronautics and Space Administration (NASA)	58
Training And Doctrine Command (TRADOC) Requirements Analysis Center (TRAC)	59
High Energy Laser Systems Test Facility (HELSTF)	59
Defense Threat Reduction Agency (DTRA)	61
Army Research Laboratory (ARL)	62
Center for Countermeasures	63
National Geospatial Intelligence Agency (NGA)	64

## **Chapter Five: Visiting the Range**

Directions to White Sands Missile Range	66
Visit Requests	68
Visiting the Range	68
Unexploded Ordnance (UXO)	70
Installation Hours of Operation	71
Smoking Policy	72

## **Chapter Six: At Home on the Range**

Morale, Welfare and Recreation (MWR)	74
Army and Air Force Exchange Service (AAFES)	81
United States Post Office	81
Internet Access	81
Telephone	82
White Sands Missile Range Main Post Area Map	84

## Appendices:

Airspace Appendix	86
General Policy	86
Flight Restrictions	87
Training Missions Appendix	89
Ground Safety Appendix	95
Procedures	95
Safety Standing Operating Procedure (SSOP)	95
Certification of Hazards	95
Flight Safety Appendix	96
Safety Policies and Approvals	96
General Policy	96
Real-Time Safety Management Tracking	98
Flight Termination System Requirements	99
Flight Safety Information Requirements	99
Laser Safety Appendix	103
Categories of Operation	103
Procedures	103
Documentation	104
Explosive Ordnance Disposal Appendix	105
Frequency Utilization and Management Policy Appendix	106
Process Authorization	106
Electronic Countermeasure Activities	107
Financial Systems Appendix	109
Vision Digital Library System (VDLS)	109
Request for Test Services (RFTS)	109
Telemetry Systems Appendix	113
Data Capabilities	113
Telemetry Data Center	113
Radar Systems Instrumentation Appendix	115
Army Navy Mobile Pulsed System (AN/MPS)-39 Multiple Object Tracking Radar	115
Multiple Object Tracking Radar (MOTR) System Description	115

Army Navy Mobile Pulsed System (AN/FPS)-16 Instrumentation Radar	117
CW Weibel Doppler Radar	119
<b>T</b> ransponders Instrumentation Appendix	122
Radar Transponders	122
Customer Transponders	122
<b>G</b> lobal Positioning Systems Instrumentation Appendix	124
Advanced Range Data System (ARDS)	124
Global Positioning System (GPS) Small Box Configuration	124
<b>T</b> iming Instrumentation Appendix	125
<b>O</b> ptical Instrumentation Appendix	126
Multimode Automatic Tracking System (MATS)	126
Video Instrument Control System (VICS)	126
Launch Area Theodolite System (LATS)	126
Remote Instrument Control System (RICS)	126
Versatile Tracking Mount (VTM)	126
Distant Object Attitude Measurement System (DOAMS)	126
Fixed Camera System	127
Non-Track and Closed Circuit Television	127
Mobile Television Vans (MTV)	127
Aided Laser Tracking System (ALTS)	127
Video Relay Capability	127
Battlespace Real-Time Video (BRTV)	128
Mobile Infrared Telescope (MIRT)	128
Optics Remote Control and Acquisition (ORCA)	128
Virtually Integrated System for Optical Replay (VISOR)	129
<b>M</b> eteorology Instrumentation Appendix	130
Upper Air Measurement System (UAMS)	130
Surface Automated Measurement System (SAMS)	130
Atmospheric Profiler Measurement System (APMS)	130
Four Dimensional Weather Modeling (4DWX)	131
Lightning Map Array (LMA)	131
Wind Finding Radar (WFR)	132
Smart Impact Prediction System (SMART-IP)	132
Data Products	133
<b>D</b> ata Distribution Systems Appendix	135
Inter-Range Control Center (IRCC)	135
Test Support Network-Internet Protocol (TSP-IN)	137

Data Analysis Systems Appendix	142
Reliability, Availability and Maintainability (RAM)	142
Manpower and Personnel Integration (MANPRINT)	142
Human Factors Engineering (HFE)	142
System Safety Evaluations	143
Software Test and Analysis	144
System Engineering	145
Software Engineering	145
Hazardous Test Area (HTA)	146
Impact Areas	146
Safety Aspects of Impact Area	148
Program Support	148
Warheads Engineering and Assessment Section	148
Post Test Data Reduction Appendix	149
Data Product Categories	149
Visual Information (VI) Products Appendix	157
Nuclear Weapons Effects Facilities Appendix	159
Relativistic Electron Beam Accelerator (REBA)	159
Linear Electron Accelerator (LINAC)	159
Fast Burst Reactor (FBR)	159
Gamma Radiation Facility (GRF)	160
White Sands Solar Furnace (WSSF)	160
Semiconductor Test Laboratory (STL)	160
Directed Energy Weapons Effects	161
Pulsed Laser Vulnerability Test System (PLVTS)	161
Climatic Test Facilities Appendix	162
Large Test Chamber (LTC)	162
Small Test Chamber (STC)	162
Salt Fog/Humidity Chamber	162
Environmental Test Area II (ETA II)	162
Hot Chamber	162
Altitude Chamber	162
Immersion Tank	163
Conditioning Equipment	163
Dynamic Test Facilities Appendix	164
Vibration Test Capabilities	164
Shock Test Capabilities	165
Propulsion Test Capabilities	166
Acceleration Test Capabilities	166

Data Acquisition Capabilities	166
Data Processing Capabilities	166
Instrumentation Capabilities	166
Load Testing and Center Of Gravity Test Capabilities	166
Chemistry Laboratory Appendix	167
Air Force 46th Test Group Detachment 1 Appendix	169
746th Test Squadron - Central Inertial Guidance Test Facility (CIGTF)	169
Global Positioning System (GPS) Electronic Combat (EC) Testing	169
Sled Testing	169
Flight Testing	169
Reference Systems	169
Test Support Network (TSN)	170
Laboratory Testing	170
GPS Receiver and Integrated System Testing	170
Environmental Testing	170
846 <sup>th</sup> Test Squadron	170
Holloman High Speed Test Track (HSTT)	170
National Radar Cross Section Test Facility	172
586 <sup>th</sup> Flight Test Squadron	173
Center for Countermeasures Appendix	174
Methodology	174
Functional Areas	174
Field Instrumentation and Equipment	174
Digital Enhanced Seeker Van (DESV)	174
Kineto Tracking Mount (KTM)	174
Remote Launcher System	174
Joint Mobile Infrared Countermeasure Testing System (JMITS)	175
Pyrotechnics	175
Fog, Smoke, and Foam Generators	175
Millimeter Wave Electronic Countermeasure (ECM) Threat Simulator	175
Sources	175
Laser Laboratory Facilities	175
Millimeter Wave Laboratory (MMW)	175
Radiometric Support	175
Information System (IS)	176
Client/Server Computer Services	176
Production Services	176
Morale, Welfare and Recreation Appendix	177

<b>R</b> eferences	179
<b>N</b> otes	181
<b>A</b> cronyms	183
<b>R</b> everse Acronyms	193
<b>I</b> ndex	205

# CHAPTER ONE

## Introduction To The Range



Welcome to United States Army White Sands Missile Range. This handbook has been developed to help you get the most out of your testing and training program. This handbook outlines the coordination process for interfacing with White Sands Missile Range for mission planning and execution, provides an overview of missile range capabilities, and provides useful administrative information. The Appendices provide a more detailed look at policy guidelines, processes, and technical specifications and requirements. An asterisk (\*) in a section title denotes there is a capabilities appendix with additional pertinent information.


Early coordination with the Range is recommended in integrating your requirements with mission execution procedures.

You will also find a description of Range organizations, their functions, and capabilities, along with a description of the Universal Documentation System (UDS) used to interface your requirements with Range protocol. This Handbook uses "White Sands Missile Range", "WSMR", or the "Range" to include all organizations or services provided by agencies located at White Sands Missile Range.

## CONTACT INFORMATION:

White Sands Missile Range  
Business Development Office  
TeamWhiteSands@us.army.mil  
www.wsmr.army.mil  
1-866-532-9767

Commander  
US Army White Sands Missile Range  
ATTN: TEDT-WS-CSPB  
White Sands Missile Range  
New Mexico 88002

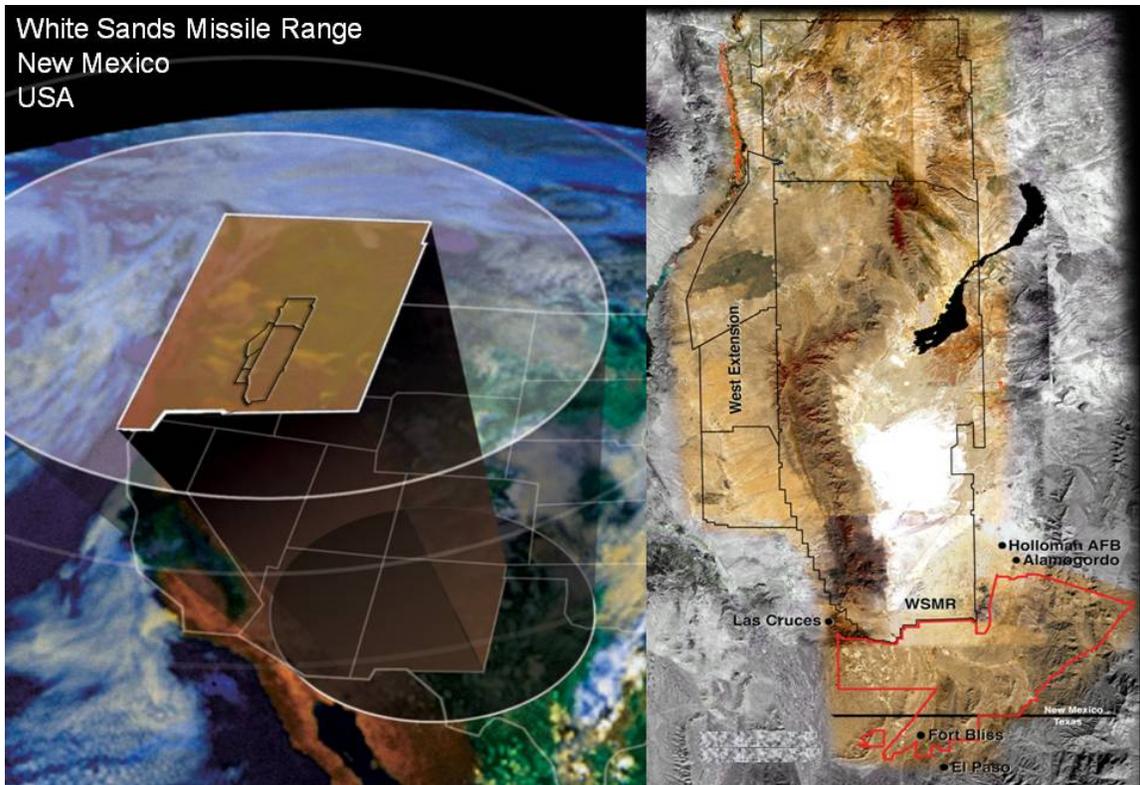

## PROGRAM PORTFOLIO:

White Sands Missile Range, once known as White Sands Proving Ground has been in the test and evaluation (T & E) business since 1945. We have supported numerous programs to bolster our Nation's defense including the following major systems:

- Advanced Medium Range Air-to-Air Missile
- Army Tactical Missile System
- Bradley A3
- Defense Threat Reduction Agency Programs-Deeply Buried Hardened Targets
- Extended Range Gun Munitions
- FCS Brigade Combat Team
- High Mobility Artillery Rocket System
- Japan ChuSam
- Japan PATRIOT
- Joint Air-to-Surface Standoff Missile
- Joint Direct Attack Munitions
- M1A1 Abrams Integrated Management Tank
- Multiple Launch Rocket System
- Non-Line-of-Sight Launch System
- PATRIOT and PATRIOT Advanced Capability 3 Missile
- Roving Sands Training Exercise
- Small Diameter Bomb
- Standard Missile
- Stryker
- Terminal High Altitude Area Defense System
- Unmanned Aerial Systems (Aerostar; Extended Range Multi-Purpose Global Hawk; Hunter; Predator; Raven; and Shadow)
- Unmanned Ground Vehicles (High Mobility Multipurpose Wheeled Vehicle; Robotic Convoy; Small Unmanned Ground Vehicle)



On range and off, we plan, conduct, analyze, and report the results of developmental, production, and other missions in the following areas:

- Air and missile defense systems
- Aircraft systems:
  - Aircraft Armaments Fixed-Wing;
  - Aircraft Survivability Equipment
- Air Delivery Systems/Air Drop
- Command & Control, Communications, Computers, Intelligence, Surveillance and Reconnaissance (C4ISR):
  - C4 Systems Integrated within Missile/Automotive/Vehicle Systems;
  - Surveillance/Reconnaissance, Information Warfare, Intelligence, and Navigation Systems;
  - Target Acquisition Architectures
- Directed energy weapons:
  - HPM; Laser
- Electromagnetic environmental effects:
  - EMI/EMC,EMP;
  - HERO, HERF, HERP;
  - electrical bonding, external grounds, and EMCON
- Indirect Fire Systems:
  - Indirect Fire Weapon Systems
- Missiles/rockets (non-aviation):
  - Line/Non Line of sight;
  - propulsion systems;
  - components/subsystems
- Non-Lethal Weapons
- Nuclear weapons effects tests
- System-of-systems integration:
  - FCS/BCT Level Live;
  - Distributed Testing (Inter-Range Control Center)
- Unmanned Aircraft Systems: Performance




In addition, we have performed a wide array of support on many non-traditional and commercial programs:

- Advanced Man-Portable Air Defense Systems (A-MANPADS)
- Basic Expeditionary Airfield Resources (BEAR) Testing
- Crane Environmental Testing
- Container Dynamic Shock Testing
- Department of Homeland Security defense Initiatives
- Dynamic Optical Tags Frequency Testing
- Fabric Shelters Extreme Environment Testing
- Industrial Heater Environmental Testing
- Linear Shape Charge Testing
- Magnetic Particle Inspection Testing
- Missile Warning Sensor Solar Radiation Testing
- Mobile Transporter Vehicle Environmental Testing
- Movie Industry Sounds and Imagery
- Respiratory Protective Gas Mask Canisters Testing
- Sound Impulse Propagation Test
- UAV Acoustic Testing
- USMC Expeditionary Fighting Vehicle
- U S Mint Gold Bar Chemical Testing

## OVERVIEW OF THE RANGE:

White Sands Missile Range is part of the Developmental Test Command (DTC), which reports to the United States Army Test and Evaluation Command (ATEC). WSMR is designated as an activity within the DoD Major Range and Test Facility Base (MRTFB). The Range possesses extensive capabilities and infrastructure utilized by the Army,

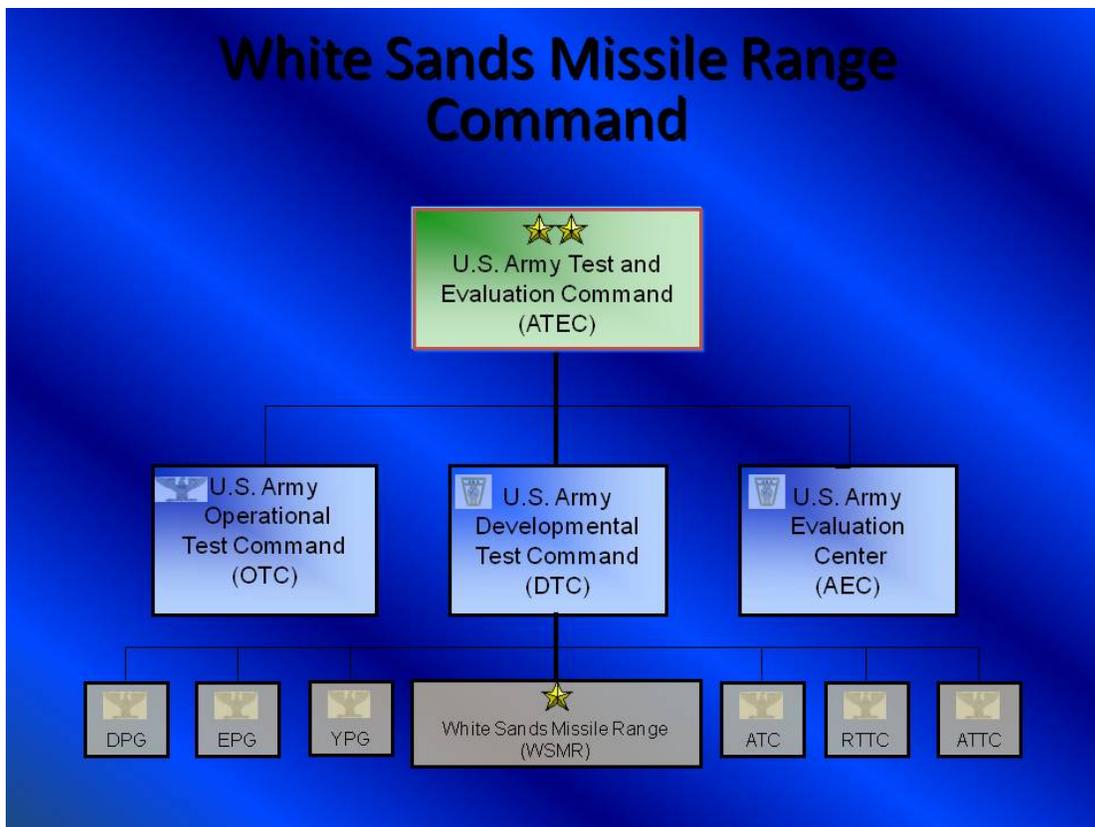



# Land Space & Terrain

## Diverse Terrain

Elevation – 4,000 to 9,000 ft,



Rolling grasslands



Wooded Mountains



Desert Mountains




Gypsum Sand Dunes



Desert Floor

- White Sands proper - 3,421 sq. miles (5,149 sq. kilometers)
- Lease agreements add 2,343 sq. miles (3,771 sq. kilometers)
- Partner with Ft. Bliss add 1,562 sq. miles (2,514 sq. kilometers)

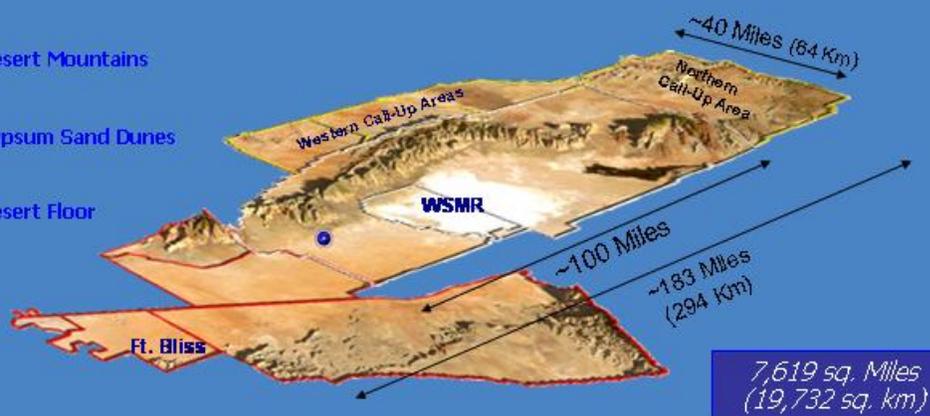

and some surprising aquatic elements. Mountains of 5,000 to 12,000 ft parallel WSMR on the east and the west and cross the range in a north-easterly direction about 75 miles north of the main launch complexes.

Additional WSMR launch areas are located in northwest New Mexico (Ft. Wingate just east of Gallup), southeast Utah (Green River) and in Idaho (Shoofly). These areas provide an overland flight corridor of 500 to 1,000 miles. Additional lead time is required to bring these sites up to a fully operational status.


## Climatic Annual Mean Values:

- Maximum/mean/minimum temperatures: 75/63/50 degrees F
- Relative humidity: 39 percent
- Precipitation: 11.32 inches
- Snowfall: 7.8 inches
- Wind velocity: 7 mph with gusts to 35 mph and a record gust of 117 mph.

## Testing Environment Highlights:

- Climate is semi-arid with a visibility that is usually unlimited.
- Visibility greater than 6 miles, 311 days per year
- Fewest weather delays anywhere: exceptional for optical data collection
- Tularosa Basin provides natural security & nearly zero encroachment.
- Mountains provide protection and security for directed energy (laser, HPM) testing

- Ideal for conducting GPS and open air RF jamming in a live fire scenario and more
- Land Space: 100 miles x 40 miles (160 km x 64 km) expandable to 180 miles X 60 miles (11,500 miles<sup>2</sup>) including neighboring Ft. Bliss and call-up areas
- Diverse terrain ranges from high desert valley at 4,000' MSL to desert and wooded mountains at almost 9,000' MSL
- Air Space: 7,500 NM<sup>2</sup> (10,020 miles<sup>2</sup>) ground to space expandable to 8,410 NM<sup>2</sup> (11,130 miles<sup>2</sup>) restricted
- WSMR Air Traffic Control center manages and controls airspace 24/7/365 with full FAA scheduling authority

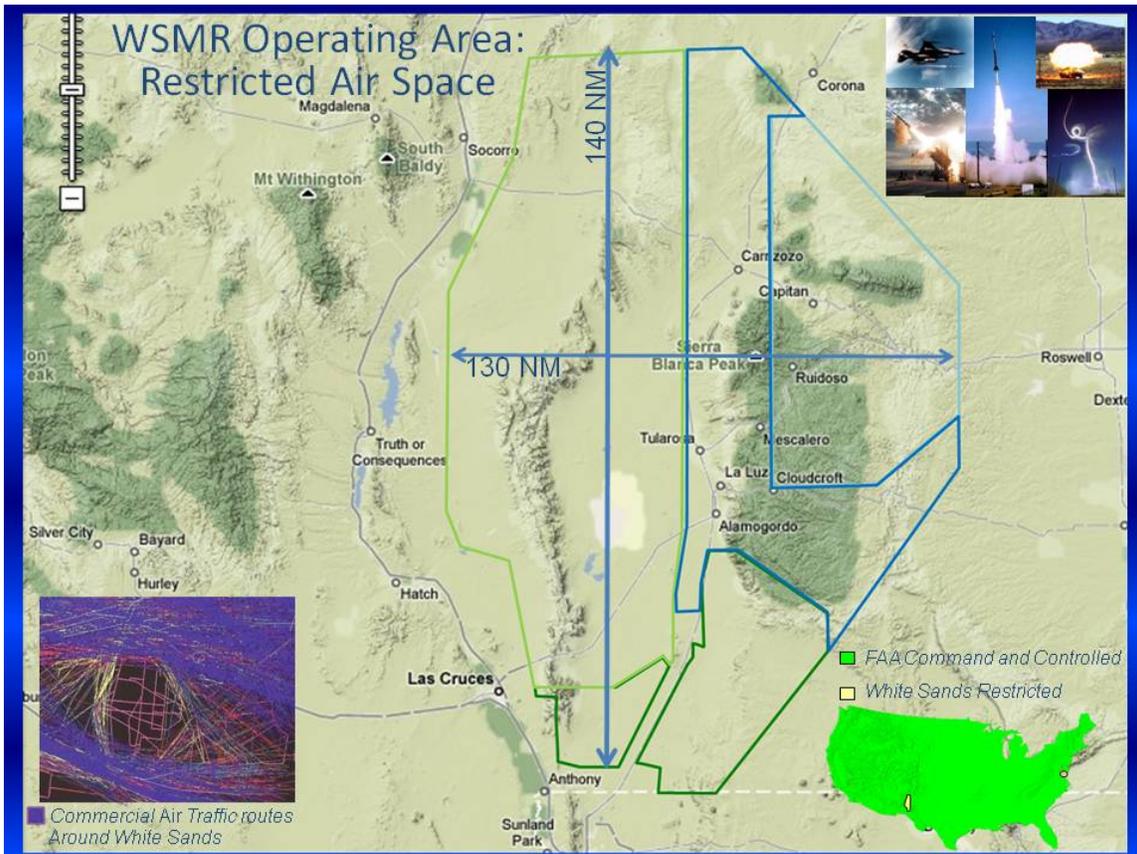

The highly diverse, natural environment with all terrain types apart from littoral can be augmented with an extensive array of threat-representative ground and airborne targets as well as infrastructure targets, cave networks, deeply buried structures, and employment of realistic electro-magnetic and ECM environments. Ground targets run the gamut of depreciated vehicle hulks (no cost) to fully functional remote controlled threat and surrogate armored vehicle formations. Aerial targets include subscale and full scale drone aircraft, and other Unmanned Aerial Systems (UAS) that can be flown in formation to assess electronic warfare, countermeasures and measurement systems.

WSMR is populated with major test facilities, laboratories, along with launch and impact sites. WSMR is populated with over 3,000 instrumentation sites, extensive instrumentation and a data processing facility for real time and deferred test data


processing. These capabilities are augmented by several resident organizations and by WSMR-controlled restricted airspace over the Range.

The Range controls all its electromagnetic radiation, conducts research and development involving Range instrumentation and operates nuclear, high energy laser, and aerial cable test facilities.

Other capabilities include providing timing signals, target support, telemetry, flight safety, hazardous explosive tests, calibration and standards, photography and film processing, trajectory, attitude and event measurements, communications throughout the Range, recovery of components, report preparation and data evaluation. Additional capabilities include storage of ordnance and propellants and providing environments for controlled, simulated or static testing.

## RANGE ORGANIZATIONAL STRUCTURE:

WSMR is collectively known as Team White Sands and is comprised of two main areas, the Garrison and the Test Center (WSTC). The WSMR Garrison manages installation resources to promote well being, improve infrastructure, and preserve the environment. WSTC is responsible for overall planning and execution of test and evaluation missions.

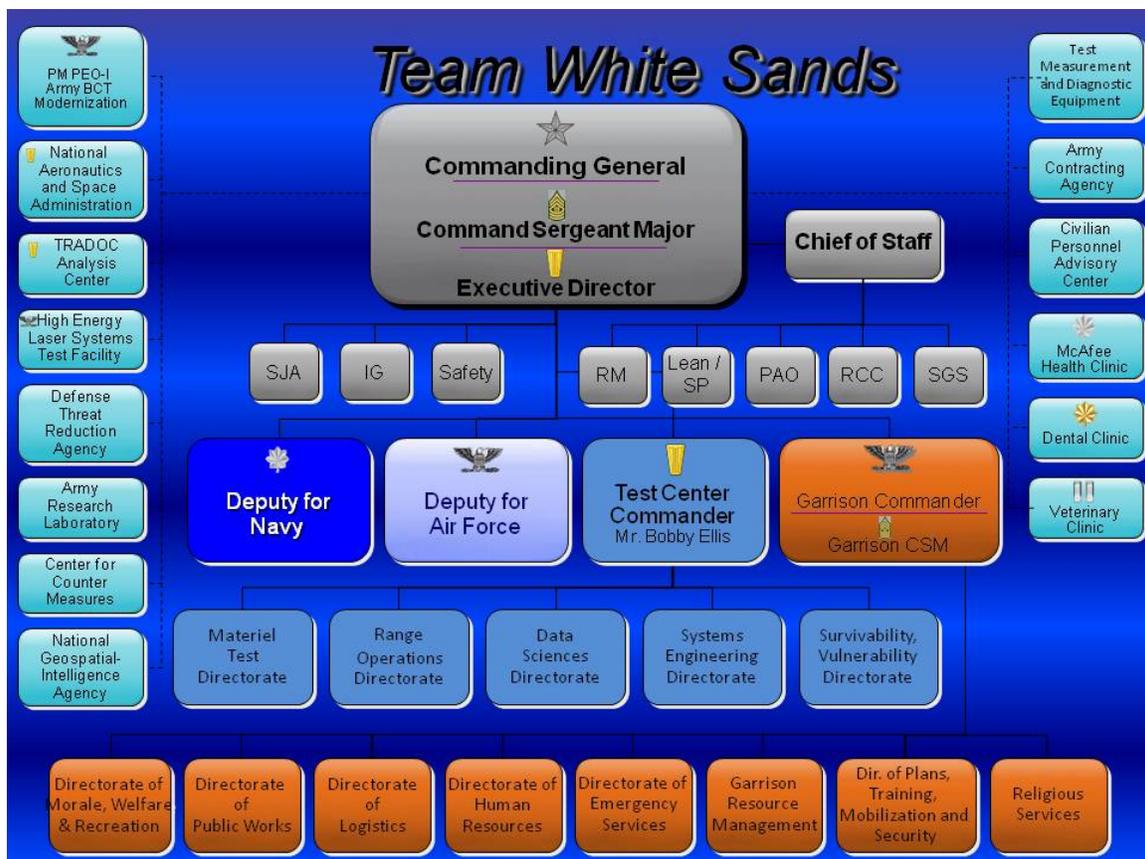

The Materiel Test Directorate (MT) is the testing arm of WSMR. It provides evaluation of Army systems, materiel and equipment through field and laboratory testing.

The Range Operations Directorate (RO) establishes and implements policies, programs, procedures, in addition to development and acquisition for range instrumentation, range

operations, data measurements, data reduction, and complete flight safety control for all missiles, rockets, munitions and other devices launched from or into WSMR, or which pass through WSMR controlled airspace.

The Data Sciences Directorate (DS) operates and maintains the WSMR real-time and post-test computer systems. In addition, it provides state of the art, real-time processing and display of both range instrumentation and telemetry data for range customers as well as post-test analysis.

The Systems Engineering Directorate (SE) provides development and acquisition for range instrumentation along with managing range investment programs for new technology research and development.

The Survivability, Vulnerability & Assessment Directorate (SV) is a recognized center of expertise for nuclear effects test and evaluation.

The Deputy for the Navy has many unique test facilities supporting weapon testing, missile assembly and testing, and research rocket buildup and launch operations. They are the liaison with WSTC and sponsor for Navy test programs.

The Deputy for the Air Force provides test sponsorship for programs testing on WSMR. They are the liaison for Air Force programs and interface with WSTC.

# CHAPTER TWO

## Interfacing With The Range



## DOING BUSINESS WITH THE RANGE:

White Sands is interested in doing business with you and assisting with your testing and training mission requirements. The Business Development Office (BDO), part of the WSMR Chief of Staff's Plans and Operations Office, is your initial point-of-contact (POC) when researching options for your program. The information that follows provides detail on missions of a testing nature. A special section has been included in the Appendices to address policy for training missions (\*) conducted on WSMR.

Your BDO personal representative can be contacted at:


TOLL FREE:  
1-866-532-9767

EMAIL:  
TeamWhiteSands@us.army.mil

Commander  
US Army White Sands Missile Range  
ATTN: TEDT-WS-CSP-B  
White Sands Missile Range  
New Mexico 88002

The BDO office stands ready to provide the following test program services:

- Review your request for a quote or a Scope of Work prepared by your organization
- Respond with a WSMR Support Proposal package and cost estimate based on your requirements
- Coordinate associated documentation necessary for working relationships with:
  - State, local, DoD and non-DoD government agencies, research organizations and commercial companies.
  - Foreign government agencies, research organizations and commercial companies
- Once the Proposal package and estimate meet your satisfaction, the proposal package has been signed, and the contract coordinated (if required), a WSMR Sponsor Organization will be designated and the respective Test Officer will be assigned. The Test Officer will be your single point of contact for support planning and execution for your test program per details below:

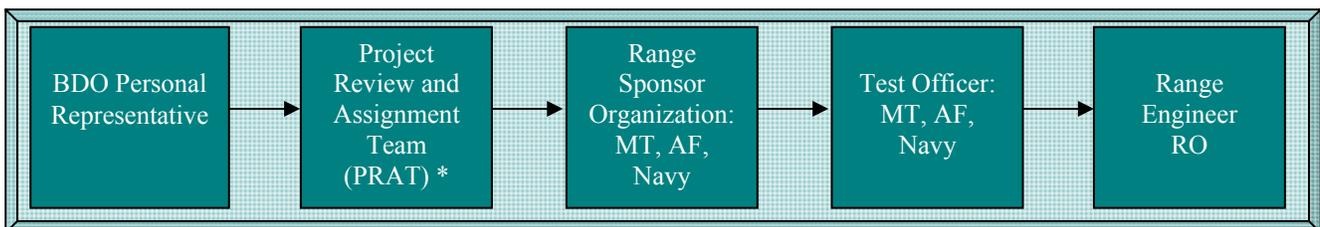

The BDO Personal Representative interfaces with the Project Review and Assignment Team (PRAT) who in turn reviews the proposal and assigns a Range Sponsor Organization. (\*Note: Laboratory-type testing is exempt from Sponsor assignment). Approved Range Sponsor Organizations are Materiel Test Directorate (MT), the WSMR Air Force Detachment, or the WSMR Navy Detachment. Sponsor organizations are authorized by the Commanding General and committed to fulfilling your program requirements.

## **SPONSOR ORGANIZATIONS:**

**MATERIEL TEST DIRECTORATE (MT)** sponsors Army programs, except for high energy laser programs and those programs conducted by Army Research Laboratory. MT also performs test and evaluation of various Army weapon systems.



*A test officer with the Materiel Test Directorate's Future Force Division, unmanned vehicle/soldier branch fires an M4 carbine fitted with a new thermal sight undergoing environmental testing. He must wear an oxygen mask because the heated facility used to simulate high temperature environments has limited ventilation, causing the weapon to burn off most of the oxygen during the test firing. (photo by Drew Hamilton)*

## **PORT HUENEME DIVISION NAVAL SURFACE WARFARE CENTER DETACHMENT WHITE SANDS**

**(PHDNSWC - WS)** sponsors Navy programs and research rocket launches for a variety of customers. White Sands Navy programs include directed energy weapons, guided munitions and lasers, surface and air launched live-fire weapon systems testing, missile and rocket assembly, Navy gun systems testing, radar development, upper air research rocket launch operations, and assembly and launch of ballistic missile target vehicles.

*Aegis Readiness Assessment Vehicle (ARAV)*



**AIR FORCE 46TH TEST GROUP DETACHMENT 1 (DET 1, 46<sup>TH</sup> TG)** sponsors Air Force programs testing on WSMR. Det 1 assists you, the customer in preparing documentation for support services and coordination of WSMR logistic and support resources. Air Force programs include air launched missiles, tactical fighter training, flight testing of advanced weapons and avionics systems, specialized ordnance testing and high altitude and tethered balloons.



*A target dummy remains standing after a test of the Focused Lethality Munition. The test destroyed a target building but left the dummy, representing a bystander, unharmed. (Photo by Drew Hamilton)*

The WSMR Sponsor Organization represents you, the customer. The Sponsor Organization has overall responsibility for coordinating test support activities necessary in planning and executing a test program and will assign a Test Officer (TO) to serve as the overall Program Manager for test support activities. TO responsibilities include:


- Providing information about WSMR capabilities, policies and procedures.
- Preparing customer documentation. All requirements are submitted to the Range through the sponsor. The sponsor confirms all customer support requirements.
- Ensuring that the services requested from contractors are authorized under the terms of their contracts.
- Acting on behalf of the customer to obtain WSMR services and in dealing with WSMR organizations on financial matters.
- Representing the customer on the Range scheduling requirements.
- Providing updates of workload forecasts for each program.
- Placing job orders directly with various WSMR organizations to obtain non-scheduled support.
- Providing information about on-Range and safari capabilities.

The Test Officer will in turn coordinate all Range requirements with the Range Operations Directorate (RO) Range Engineer.

The RO Range Engineer assists the customer in all aspects of testing involving RO and Data Science (DS) assets. This includes coordination of early planning, all levels of documentation, data collection, validation of support plans, scheduling, post-test data processing, program budget management, performs problem solving and provides general assistance to customers throughout the life of the program. Additionally, all Universal Documentation System (UDS) documents are processed through the RO Range Engineer. The engineer suggests new or corrective action through instrumentation or methodology development.

A synopsis of the functions of the Range Engineer is shown below:

# Program Planning and Documentation

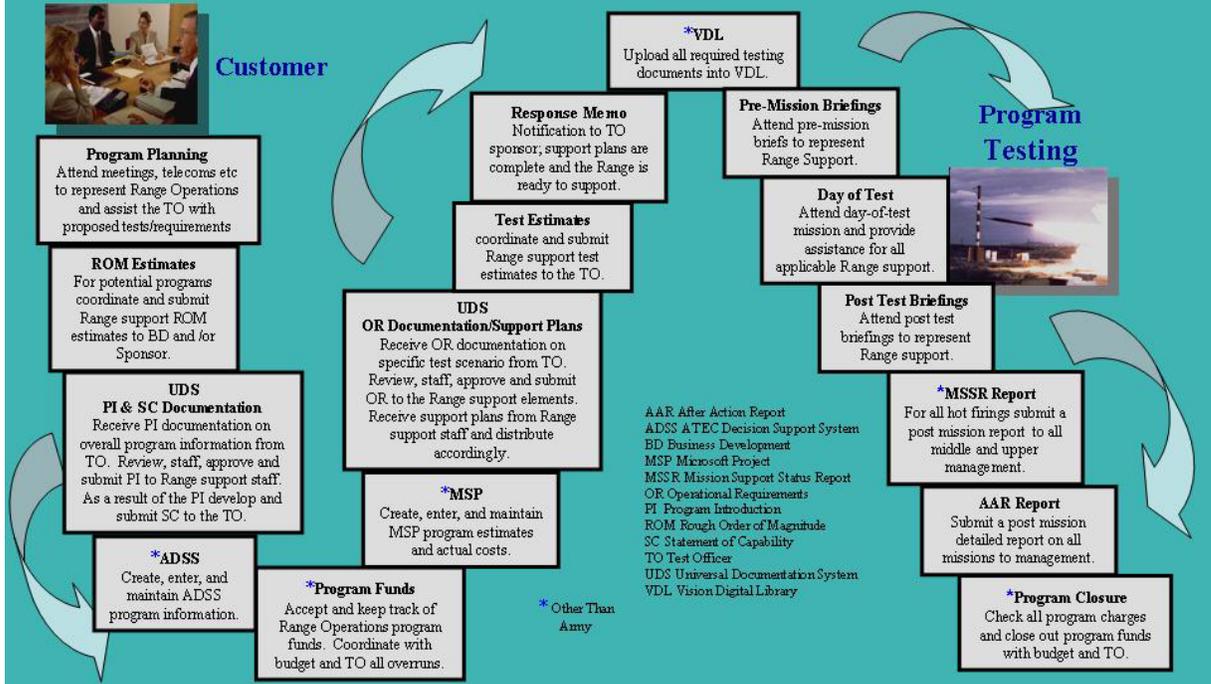



# CHAPTER THREE

## Mission Planning On The Range




## UNIVERSAL DOCUMENTATION SYSTEM:

Test planning and execution will be performed using the Universal Documentation System (UDS). The UDS was designed by the Documentation Group of the Range Commanders Council (RCC).

*“The RCC seeks to preserve and enhance the nation’s warfighting superiority by ensuring that affordable technical capability and capacity are available to test and operate the world’s most effective weapons systems and to train the warfighters who use them.”*

The UDS provides a means for customers to submit their requirements to the test ranges and for the test ranges to respond to those requirements.

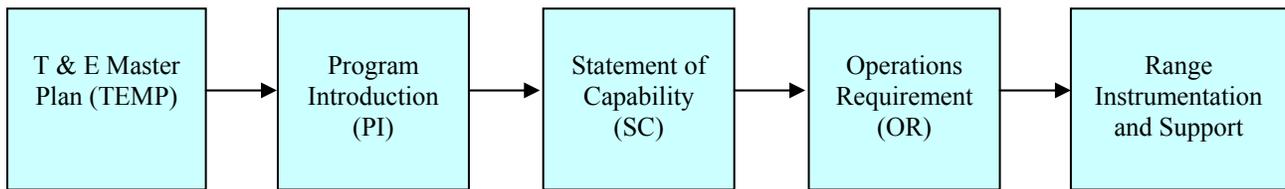

The Test Officer assists customer in writing Program Introduction (PI) using the customer’s Test and Evaluation Master Plan (TEMP). The Program Introduction (PI) is the initial planning document submitted by a WSMR customer. The PI should state in general terms the overall requirements for the program. The PI establishes the scope of the program and is used by WSMR to identify requirements for new support capabilities.

The TEMP details project requirements and program scope. The PI then goes to the Range instrumentation and support organizations, the Environmental Office, and the Garrison Command where personnel review and provide detail to the Range Engineer on how they can support the requirements. The Range Engineer and the Test Officer then create the Statement of Capability (SC) with this information and present it to the customer. The SC is the WSMR response to the PI. Support capabilities, support limitations, responsibilities, and other subjects are identified in this document, which serves as a baseline reference for subsequent WSMR support of the program.

The Sponsoring Organization’s Test Officer then begins to work with the customer on specific detailed requirements. The Test Officer and customer create the Operations Requirement (OR) document together. The Operations Requirements (OR) is a detailed statement of information and requirements for one or more specific operations. The OR should not reflect new requirements that were not previously stated in the PI. The WSMR customer submits as many ORs as are required for the operations to be conducted during the lifetime of the program. The Range Engineer coordinates range instrumentation and support based on detailed information provided in the OR. Each WSMR support plan is the response of a WSMR support organization to the requirements submitted in an OR. A WSMR support plan shows the specific support to be provided for the operation(s) contained in an OR. Examples of these WSMR support organizations might include the following branches: Radar, Optics, Telemetry, Flight Safety, Range Control, or Data Sciences. The Test Officer is also available to assist the customer in preparation of an Operations Security (OPSEC) plan which is required prior to the start of testing.

Each UDS program is assigned a three-digit UDS program number which serves as the unique program identifier and remains with the program throughout its life cycle on the Range. These numbers are assigned within blocks categorized for Army, Air Force, Navy, or Other programs. The time required for processing the UDS requirements documents will vary, depending on the complexity of the program and the operations. Typical times are as follows: PI (65 workdays); OR (20 workdays).

Assistance with the preparation, submission, and cancellation of new and revised UDS documents may be obtained from the Sponsor Organization Test Officer.

## **RANGE POLICY:**

There are several policies WSMR has in place to help the planning stages of your test program flow smoothly. Please find a synopsis on Environmental Considerations, Security, Safety, Scheduling, Airspace, Frequency Utilization and Management, and Resource Management information.

**ENVIRONMENTAL CONSIDERATIONS POLICY:** Range Customers and Sponsors should incorporate environmental policy early in the test planning and decision making process to ensure environmental requirements are met and to avoid potential mission delays and increased costs.

- **NEPA AND AR200-2:** The National Environmental Policy Act (NEPA) requires that any proposed Federal action considers environmental effects as part of the planning process. The NEPA process encourages public involvement in decision-making and collaboration between federal, state, and local agencies. In compliance with the NEPA mandate, Army Regulations (AR) 200-2 provides specific environmental and documentation requirements for Army actions. WSMR is subject to NEPA and all federal and state regulations involving air and water quality regulations, endangered species protection, waste and material handling and disposal, and historic preservation.



- **NEPA PROCESS AT WSMR:** NEPA is used to help WSMR continue sustainable use of the Range for multiple missions and programs. Depending on the proposed action and the level of documentation needed, the process duration ranges from weeks (e.g., Record of Environmental Consideration), to months (e.g., Environmental Assessment), to years (e.g. Environmental Impact Statement).
- **CUSTOMER SUPPORT FOR NEPA COMPLIANCE:** Range Customers should work directly with the Range Sponsor to initiate the NEPA process and complete required NEPA planning and documentation. Sponsors can assist customers to develop a detailed

Description of Proposed Action (DOPA) to submit for NEPA review. WSMR provides assistance to customers and sponsors during the NEPA planning process. An interactive NEPA form is under development that will assist the Range Sponsor in preparation and auto-generation of the DOPA. This will reduce cost and time resources and auto-route the DOPA to environmental personnel for reviewing and approval. Currently, information on federal, state, DoD and Army Regulations, WSMR instructions and policies, Geographic Information Systems (GIS), and siting location assistance is available and can help to ensure that legal and other required reviews and approvals are met.

The *WSMR NEPA Process Guide* assists Range Sponsors and Customers with environmental planning by facilitating well-informed decisions and accurate and high-quality environmental analysis from the input of a coordinated interdisciplinary group of subject matter experts.

In addition, The Integrated Training (and Testing) Area Management Program (ITAM), AR350-19, provides sighting support and is capable of supporting military projects with finding suitable, accessible, and sustainable locations to conduct project activities. The ITAM program bridges environmental considerations with operational requirements, attempting to find reasonable solutions while minimizing environmental degradation. ITAM staff can assist Test Officers with identifying environmental considerations and integrating mission requirements into the environmental documentation process. ITAM assists with the development of mitigations and on a case by case basis implementing mitigations measures.

**SAFETY POLICY:** It is important to factor in safety measures during the planning phase of your mission. Safety policies at WSMR ensure a successful, safe mission and ensure the integrity of the land and airspace at WSMR for future testing. Safety guidelines have been put in place at the installation for the following test areas: Ground Safety, Flight Safety, Laser Safety, Explosive Ordnance Disposal, and Industrial Hygiene. Safety precautions for Unexploded Ordnance (UXO) are addressed later in this document.

- **GROUND SAFETY\*:** The WSMR Commander administers responsibilities for ground safety through the WSMR Safety Director. Operational safety during ground launch operations is best suited as the customer's responsibility. The customer should inform The WSMR Safety Office of the name of the Project Safety Officer.



- **FLIGHT SAFETY\*:** Flight Safety Officers are responsible for the safety of the public and range personnel during weapon test flights, laser operations and other unmanned flight vehicle testing that could be hazardous. They also provide approval of any required flight termination systems, information requirements for flight safety planning, and details on safety policies and approvals.

- **LASER SAFETY\*:** The Test Center Safety Office and the Flight Safety Branch have distinct responsibilities for managing range operations involving lasers. The Test Center Safety Office establishes procedures for the safe use and handling of the laser system. Flight Safety establishes procedures to ensure protection to Range personnel and the general public during laser operations, such as operating limits, exclusion areas (ground and airspace), and personal protective equipment requirements. Flight Safety has the responsibility of ensuring a predictive avoidance plan is in place to prevent unapproved laser illumination of space platforms.



- **EXPLOSIVE ORDNANCE DISPOSAL\*:** Explosive Ordnance Disposal (EOD): The EOD office handles the disposal of explosive or hazardous material in association with conducting a test. Plans should be collaborated for disposal of these materials through the EOD office.

- **INDUSTRIAL HYGIENE:** The WSMR McAfee Health Clinic Industrial Hygiene (IH) Department works to provide a safe and healthful workplace for all soldiers, civilians, and contractor personnel at Army installations throughout WSMR by anticipating, recognizing, evaluating and controlling health hazards where military and civilian personnel work and serve.

The IH Department provides services such as Chemical, Biological, Radiation, Nuclear and Explosive (CBRNE) support. IH conducts respiratory fit testing for all Soldiers and Civilian personnel who support the surety missions here at WSMR. They also provide training related to incident preparedness and response.

In addition, the IH Department provides work place evaluations and health and safety training. Recommendations are made based on the evaluation to implement administrative, engineering or personal protective equipment controls or combination of these controls to ensure a safe and healthy work environment.



- **HAZARDOUS MATERIALS:** The WSMR Hazardous Communication (HAZCOM) Program applies to all work operations at WSMR where personnel have the potential to be exposed to hazardous materials under normal working conditions or during emergency situations. HAZCOM is specifically applicable to the use of hazardous materials. A material is defined as hazardous if it exhibits either a physical or health hazard. A physically

hazardous material is a material for which there is scientifically valid evidence that it is a combustible liquid, a compressed gas, explosive, flammable, an organic peroxide, an oxidizer, pyrophoric, unstable (reactive) or water-reactive. Health hazardous materials are carcinogens, toxic or highly toxic agents, reproductive toxins, irritants, corrosives, sensitizers, hepatotoxins, nephrotoxins, neurotoxins, agents which act on the hematopoietic system, and agents which damage the lungs, skin, eyes, or mucous membranes. All visitors must be trained on site-specific hazards prior to entry into a location that contains hazardous materials. Visitors that will be at a site for longer than one week shall be trained in accordance with (IAW) all HAZCOM requirements.

- **MATERIAL SAFETY DATA SHEETS AND HAZCOM STATIONS:** An MSDS (Material Safety Data Sheet) provides specific information on the material used. A HAZCOM Station is an information station immediately accessible to employees and visitors as they enter a facility and accessible to employees during their normal workday. Each program work area that uses hazardous materials shall have a prominently displayed HAZCOM Station with the following documentation on-hand:
  - A file or binder that contains the hazardous material inventory and an MSDS for each identified hazardous material for your program. All MSD Sheets should be arranged in alphabetical order with the name of the chemical highlighted in a yellow or red binder with the word MSDS prominently displayed.
  - Current inventory of Hazardous Material (HM)
  - HM must be approved prior to arrival on WSMR

**RANGE OPERATIONS MISSION SCHEDULING POLICY:**

**MISSION SCHEDULING PRIORITIES:** The White Sands Missile Range (WSMR) Mission Scheduling process for the open air test range is depicted below. It is a careful balance of ensuring efficient Range utilization, taking into consideration program and mission priorities, and managing the external factors that affect our mission and our neighboring communities. The process is also an iterative process because as one area is optimized it affects other areas or as one test program is accommodated it affects other programs on the range schedule.

**EFFICIENT RANGE UTILIZATION:** In order to make efficient utilization of range resources, utilization of resources as well as range support element limitations must be considered. For example, if two missions could be scheduled with extensive optics support back to back in the south portion of the range, that might be more efficient use of the Range's resources than scheduling a south range mission, moving optics uprange for another mission and then moving them back downrange for another mission. Other range support limitations include length of day and turnaround time. Our bargaining unit personnel are not permitted to work longer than 16 hours and are required to receive a minimum of 10 hours turnaround time to support the next day, without Command approval.

# Range Scheduling Process

*“Scheduling is an iterative process and requires a careful balance to ensure efficient range utilization, taking into consideration program and mission priorities, and managing the external factors due to our neighboring communities, to provide the best support to all our range customers .”*



**PROGRAM PRIORITY LIST:** A WSMR Program Priority list will be developed at the beginning of each fiscal year to identify program priorities for purposes of getting on the Range Schedule. This process allows for WSMR to consider Department of Defense (DoD) and other service priorities in assigning a priority and also provides better definition than our previous priorities did. The designation of a high priority does not automatically guarantee a place on the Range Schedule. Utilization of Range resources, program and specific mission priorities, and other external factors must be balanced to provide the best support to all test customers and to be viable for many years to come. The Service Sponsors (Army, Navy, and Air Force) will provide input to the WSMR Program Priority List and the Range Operations Control Division will be responsible for consolidating the lists, obtaining the White Sands Test Center (WSTC) Commander’s approval, and publishing the list on the WSDM portal. The WSMR Program Priority List will be updated at mid-year. A new program may be added to the List via the regularly scheduled Program Resource Assignment Team (PRAT) monthly meetings where the services get together to discuss new program and assign sponsorship. In addition, a program (through their Service Sponsor) may request their program priority be increased via email coordination with the WSTC Commander. Once approved, a new updated Program Priority list will be posted by Flight Safety.

**PRIORITY DEFINITIONS:** The service sponsor will use the following definitions for purposes of assigning their programs into priority bins:

- Priority 1: Documented Force Activity Designator (FAD) 1 and Global War on Terror (GWOT), rapid deployment
- Priority 2: Major Research, Development, Test and Evaluation (RDT&E), full range support, multiple missions, supporting near term milestone or acquisition decisions
- Priority 3: Minor RDT&E, Foreign Military Sales (FMS), fixed or limited test windows (or campaign), full to minimal range support
- Priority 4: Stockpile reliability, field surveillance, short duration test series or campaigns, research and development, laboratory, full to minimal range support
- Priority 5: Catch all - Limited range support
- Priority 6: Minimal or no range support, little or no reimbursables, training, VIP tours, hunts, environmental activities

**MISSION-SPECIFIC PRIORITIES:** Service sponsors at WSMR will conduct their own internal prioritization meetings prior to bringing their requested missions to the Weekly Scheduling Meeting. Programs may request special consideration for specific missions by using the Mission Priority Request Form (found on the WSDM portal). This form allows a program to request special consideration based on very specific and unique mission requirements, such as mission must be completed within certain windows, VIP missions with little room for itinerary changes, etc. Programs are not required to use this form, but if they do, they must provide to Scheduling by 1500 hrs Monday before the Weekly Scheduling Meeting or 1500 hrs Tuesday if Monday is a Holiday.

**EXTERNAL FACTORS:** There are several factors that are beyond the Range's control or agreements that are in place with our neighbors or other agencies that must be considered in executing the scheduling process. Below is brief discussion of the major factors.

- **Highway Roadblocks:** WSMR has agreements with the state of New Mexico and Texas to block Highways 70, 54, and 380. The highways may only be blocked for a maximum of 1 hour. Only with the Commanding General's approval can they be blocked for an additional 20 minutes.
- **Ft Bliss Evacuation:** with the increase of training activities at Ft Bliss, evacuation of Ft Bliss ground or airspace requires early coordination with their office.
- **Off Range Evacuations:** Initial request for off-range evacuations must be made NLT T-30 calendar days. Off-range evacuation of the Western Extension and the north FIX area are not permitted from 15 Oct-15 Nov of any year based on agreements with local ranchers. Evacuation notification letters are mailed to the ranchers at T-30 and T-15 calendar days. Notices are hand-delivered to evacuated area residents at T-3 WD. The customer will incur cost of the evacuation (per diem, etc) based on the agreements with the local ranchers, once the T-3 notice is delivered even if the mission is cancelled.
- **White Sands National Monument (WSNM) Evacuation:** The WSNM is essentially in the middle of our range and usage must be negotiated with WSNM personnel for the ability to evacuate them. Most missions requiring evacuation of the WSNM are done in the mornings, prior to 1000 hrs, especially during the summer months to mitigate impacts to the WSNM.
- **Off Range Airspace:** Off Range airspace does require coordination with the Federal Aviation Administration (FAA) and requirements for this should be defined as soon as they are known.

**MISSION FORECASTING:**

- **A MINIMUM SUPPORT PLAN (MSP)** is required to initiate a scheduling request on the Long Range Forecast. An MSP provides the minimum amount of information necessary to determine the range resources required to support the mission. Any unique mission requirements such as launch windows, long lead deployment schedules, and VIP schedules must be identified in the Program Description on the MSP or provided to the Range via the Mission-Specific Priorities Form. The Service Schedulers or Range Engineers may submit an electronic request through the WSDM portal to the Range at any time up to and including day of test (X-Ray), provided UDS documentation exists. An MSP with no existing UDS documentation will not be accepted if the mission is within the 20 workdays (WD) prior to test. Once the information on the MSP is checked for accuracy and completeness, the RO Scheduling Manager will accept the request and the mission request will be placed on the Long Range Forecast. Missions placed on the WSDM Long Range Forecast will be given priority over those that don't use the Long Range Forecast based on Scheduling Priorities. Every effort will be made to honor the requested date. However, there may be circumstances beyond the Range's control which may require the relocation of the mission from the requested date. In this case, priority will be given to the next available date.

**WEEKLY SCHEDULING MEETING:** A Weekly Scheduling Meeting will be held Wednesday of every week to schedule missions for the following five weeks, not including the current week. Four weeks will have already been scheduled and one additional week will be added. Missions scheduled for the entire five weeks may require adjustment to the schedule dates and/or time depending on updated/modified mission requirements and/or availability of range resources. Every attempt will be made to schedule missions on the date requested. However, the final assignments of the scheduled date and times will be made to ensure turnaround times, length of workday, and the most efficient usage of support resources i.e. radar, optics, etc.

**SCHEDULING ON WEEKENDS / HOLIDAYS:** In order to ensure that Range time and resources are efficiently used to the fullest extent during normally scheduled working days and to reduce the Range's overhead costs, the use of the following form has been implemented: Scheduling Request for Weekends and Holidays (found on the WSDM portal). This form should be provided to Range Scheduling by 1500 hrs Monday before the requested weekend or holiday or 1500 hrs Tuesday if Monday is a holiday. Given our mission workload we recognize that we will have to require our workforce to work on weekends and holiday, but this policy also allows the Range to consider the need for workforce rest periods/downtime.

**CANCELLATION CHARGES:** At this time, there are no cancellation fees; however, unavoidable direct costs that have occurred prior to the customer cancelling or aborting the test are charged to the customer. These costs include time and materials required to get personnel and instruments back to their deployment point or other location to support another test. A process is currently underway to define new cancellation fees.

**SCHEDULING RANGE SPECIAL ACCESS PROGRAMS:** Project personnel should contact the White Sands Test Center Commander for scheduling information on special access programs.

**OFF RANGE EVACUATION (CALL-UP) AREAS:** WSMR has a cooperative agreement with Ranchers at the Northern end of Range property. These land areas, known as the Extension Area, can be called-up for usage for projects requiring the additional land space. Common call-up areas are known as Fix, A350, Abres 4A, and Abres 4A Extension.

● **RANCHER REQUIREMENTS:**


- Evacuation duration no more than 12 hours
- Limited to 25 firings per year, 6 firings per month
- Minimum of 48 hours between evacuation periods
- Evacuations unavailable during cattle shipping season (15 Oct-15 Nov)
- Evacuations unavailable on Thanksgiving or the day prior; limited on outside work week and on holidays
- Permission required from Rancher for recovery operations
- Range notifies Rancher of requirement at T-30 days, T-10 days, and Range Rider hand delivers green card (go ahead) at T-3 days

● **EVACUATION CANCELLATIONS:**

- Cancellations must be done no later than T-4 Working Days (WD). At T-3 WD the project will incur the costs of the evacuations as if the mission had completed.
- If the mission needs to cancel and reschedule, there must be at least 3 WD in between the cancelled mission date and the next scheduled mission request.
- If one rancher says no to the reschedule, there is a possibility the area will not be evacuated.

**FREQUENCY UTILIZATION AND MANAGEMENT POLICY\*:** The Test Center Frequency Management Office has the responsibilities for managing frequency allocation and authorization for requested frequencies by customers testing on the range. The Frequency Management Office follows the procedures and policies for coordinating frequency allocation for research, development, acquisition, fielding and operation of Army material requiring frequency spectrum support. The Frequency Management Office adheres to the Army spectrum management functional processes necessary to implement the National Telecommunications and Information Administration (NTIA) Manual of Regulations and Procedures for Federal Radio Frequency Management and the provisions of Dept. of Defense Directive (DoDD) 4650.1

**AIRSPACE POLICY:** Air traffic over the skies of WSMR is controlled by the Air Force Air Combat Command, 49<sup>th</sup> Fighter Wing, 49<sup>th</sup> Operations Support Squadron from nearby Holloman Air Force Base (HAFB). The Air Force detachment is located on the Range and provides air traffic control 24 hours a day, 365 days a year. They support the customer by providing aircraft control and airspace management during missions, and maintaining air safety surveillance. WSMR has full FAA control and command of our airspace. It is restricted from outside air traffic and commercial air traffic is routed around our airspace. Approaches and departures of mission required aircraft are scheduled from HAFB. In addition, the Range has access to local Military Operating Areas (MOA): Beak, Bronco, Cato, Jackal, Morenci, Pecos, Reserve, Talon, Tombstone, and Valentine.

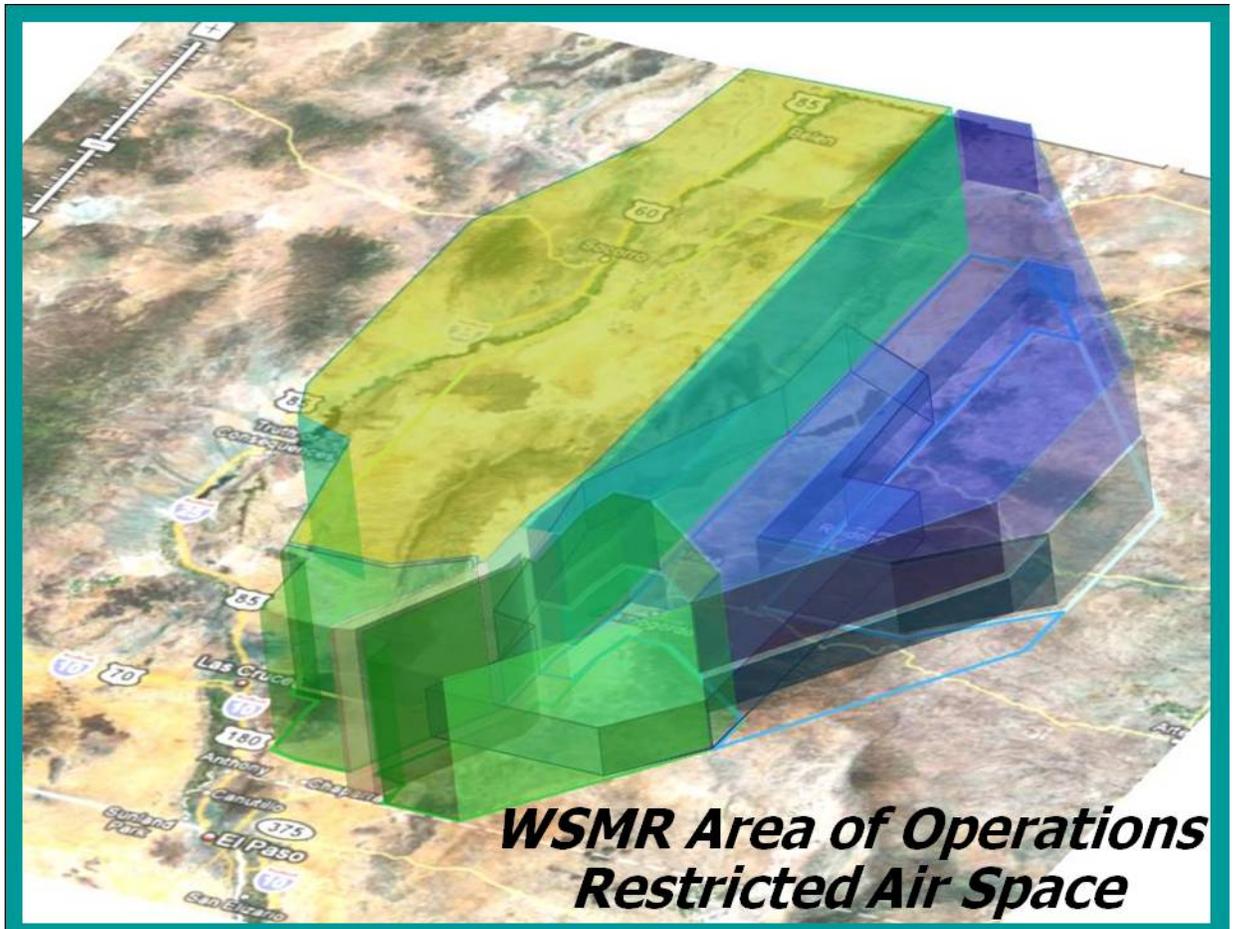

**RESOURCE MANAGEMENT POLICY:** Customers are charged Direct Costs associated with the planning, scheduling, and execution of their test program at White Sands based on DoD Regulation 7000.14-R. Cancellation and abort charges are applicable where support costs have been incurred in scheduling or execution or for incidents that result in unforeseen Range equipment damages. The above mentioned regulation states the following:

- "Direct Costs: DoD Component users shall reimburse Major Range and Test Facility Base activities for direct costs readily identifiable with a particular program. Direct costs are those costs that are directly attributable to the use of the facility or resource for testing under a particular program, over and above the institutional and overhead costs with respect to the facility or resource. Chargeable direct costs include labor, contract labor (which includes a portion of G & A and overhead), material, minor construction, utilities, equipment, supplies, items damaged or consumed during testing, and any resource or item maintained for a particular program."
- Non-DoD customers are also charged an amount of Indirect Costs associated with their testing on WSMR as deemed appropriate by the Installation Commander and per the National Defense Authorization Act of 2003.

**FINANCIAL SYSTEMS:** White Sands uses the Army Test and Evaluation Command (ATEC) Decision Support System along with the VISION Digital Library System as a single



- **VISION DIGITAL LIBRARY SYSTEM (VDLS)\*:** The VDLS is ATEC’s primary business tool for collection, management, and timely dissemination of data and information. It is a knowledge management web-based system that provides distributed information management capability, supporting information fusion and services user information needs. It can authorize and authenticate users so that information is protected and provided only to those with the proper permissions. It creates a folder in ADSS when the project is initiated (not activated). It also provides access to Test Incident Reports (TIRs) and is available to support all ATEC classified projects through Secure VDL (SVDL). Access is provided to the VDLS/SVDL project and the customer is the ultimate authority as to who has access to the data. The Test Center Test Officer is responsible for ensuring entry of the names of individuals that are given access. An account on VDLS, can be requested at the following link: <https://vdl.atc.army.mil>
  
- **REQUEST FOR TEST SERVICES (RFTS)\*:** Test Officers will assist you by ensuring that the requested service is in accordance with the Developmental Test Command Test Center’s *10-Series* mission and major capabilities regulations. They will also ensure the RFTS is submitted as soon as customer requirements have been validated and can prepare the RFTS if requested by the project sponsor. The following guidelines apply in determining if the requested service is a test project versus a non-test project:

<b>DEVELOPMENTAL TEST PROJECT EXAMPLES</b>
<ul style="list-style-type: none"> <li>● Modeling and Simulation (M&amp;S) and Engineering used to verify: Design risks; System Safety; System technical performance; or Readiness to enter Operational Test and Evaluation (OT&amp;E)</li> <li>● Generally require instrumentation and measurements</li> <li>● Normally accomplished by engineers and technicians</li> <li>● Are designed to be repeatable</li> <li>● May be environmentally controlled</li> <li>● Covers the complete spectrum of system capabilities</li> </ul>
<b>SUPPORT PROJECT (NON-TEST) EXAMPLES</b>
<ul style="list-style-type: none"> <li>● Instrumentation Support</li> <li>● Range support</li> <li>● Fabrication</li> <li>● Consultation (ATEC System Team Support; Technical Expertise; Paper Studies)</li> <li>● Non-Test support will not require a Test Directive or Plan, Environmental Documentation, or a Safety Assessment Report (SAR)</li> </ul>



# CHAPTER FOUR

## Mission Execution On The Range



White Sands provides all the capabilities necessary to ensure the success of your test during the execution phase. These capabilities are routinely utilized by the Army, Navy Air Force and other authorized customers to support their diverse test requirements. It is the goal of White Sands Missile Range (WSMR) and White Sands Test Center (WSTC) to ensure that technological capabilities, in support of the Army and other service acquisition programs, are of such high quality that key acquisition decisions can be made to ensure the war fighters have the best military hardware and software possible into the 21st Century.

WSMR continually strives to maintain and modernize current technologies and design, develop and acquire future technologies that improve the quality of test data acquisition, transmission, processing, display, and storage—all key elements of the acquisition decision process.

The future of WSMR rests on the current technologies that have been the backbone of this world premier test facility. These technologies will continue to be upgraded and modernized to support the vision of DoD decision makers in transitioning into the 21st Century land, sea, and air battle fields. WSMR continually designs, develops and acquires new technologies to meet the transformation of testing the latest military hardware and software.

Many of our nation's allies of the currently use the Range to prove out their systems. This support will only continue with improvements to the current technologies and implementation of new and future technologies.

## **DATA COLLECTION SYSTEMS:**

Data collection systems include the required throughput processes to provide the data product to the end user. Primary data collection systems are telemetry, radar, global position systems, timing, optical, and meteorology instrumentation and services. In addition, WSMR provides mobile range, army aviation, and target control capabilities.

**TELEMETRY INSTRUMENTATION\***: The Range is heavily instrumented with many types of sensors and data gathering equipment. The Telemetry System is one such type of sensor that collects information pertaining to a missile's direction, health and status. The contractor/customer normally instruments the missile at the factory with numerous data from these systems and is transmitted in open-air where telemetry tracking stations receive the information and relay it to the primary data processing station at WSMR, the Telemetry Data Center (TDC).



The data is processed and displayed for use by both external range customers, such as the missile contractor, project office representatives, and internal customers, such as flight safety.

There is a vast array of instruments in the WSMR Telemetry (TM) Suite. These digital and analog systems combine fixed and mobile site acquisition and relay capability for received telemetry signals and a telemetry processing center. The fixed systems consist of 5 fixed TM acquisition systems and comprise the primary leg of the Telemetry Acquisition and Relay System (TARS). The mobile systems consist of a mix of mobile telemetry acquisition systems known as Transportable Telemetry Acquisition Systems (TTAS) and Mobile Telemetry System (MTS) tracking systems. The mobile relay systems are known as Transportable Telemetry Acquisition and Relay System (TTARS) and Relay and Recording Van (RRV) systems. In

addition, the Telemetry branch fields supports and maintains the Remote Data Acquisition System (RDAS), a radio interferometer consisting of the Single RDAS and Dual RDAS. The branch also supports several launch and impact area support vans known as the MD-series vans. A separate system called Translated GPS Ranging System (TGRS) utilizing S-band telemetry for generating position information is operated and maintained by the Telemetry Branch.

The Telemetry Data Center (TDC) is the central processing and display facility for reception of data from all the above acquisition systems. The Transportable Range Augmentation and Control System (TRACS) is a mobile central processing and display center for use on safari missions. The Transportable Telemetry System (TTS) primary mission is for Midcourse/Terminal phase telemetry. Its secondary mission is for range telemetry augmentation. The TTS functions in a stand-alone mode to collect and record telemetry. Additionally, TTS has strip and ship capability, collecting, processing, and transmitting pre-selected telemetry for mission monitoring and/or flight safety. Please refer to the Telemetry Systems Appendix for a more information.

**RADAR INSTRUMENTATION\***: Radar Branch operates twelve instrumentation tracking radars throughout the range. Two phased AN/MPS-39 Multiple Object Tracking Radars (MOTR) and ten AN/FPS-16 radars form the basic radar instrumentation network. These are supplanted by a special purpose CW Doppler radar.



- **THE AN/MPS-39 MULTIPLE OBJECT TRACKING RADARS:** are White Sands Missile Range's most modern instrumentation radars. WSMR operates two MOTR systems. They are phased array radars, each capable of simultaneously tracking up to 40 objects within a scan volume of 60 degrees by 60 degrees. Each MOTR phased array antenna is mounted on an azimuth over elevation pedestal so that full hemispheric coverage is possible. The precision of the radar is 0.2 mils (approximately 0.2 milliradians) in angles and 1.5 yards in range. The peak power of the radar is one-megawatt, but a mix of six different waveforms provides for a total average transmitted power of 5000 watts, the highest of any of the WSMR radars. The MOTR is capable of tracking a six-inch sphere to a range in excess of 120 km.
- **AN/FPS-16 INSTRUMENTATION TRACKING RADARS:** WSMR also operates up to ten AN/FPS-16 instrumentation tracking radars. The FPS-16 is a pulsed radar that operates at C-Band frequencies. It is capable of tracking a single target as small as a six inch sphere with a precision of better than 3 yards to a distance of almost 100 kilometers. The radar can track in two modes: echo, where the radar locks onto the reflected energy from a target, and transponder mode, where an active on-board device is used for the tracking signal. Normally, the FPS-16 requires a crew of three to four technicians.

- **THE CONTINUOUS WAVE CW DOPPLER RADAR:** is a special purpose radar designed to record the Doppler Signature of a target. It is used primarily for measuring the exit velocity of ground launched missiles and muzzle velocity of direct fire weapons.

**TRANSPONDER INSTRUMENTATION\*:** Radar transponders are an integral part of the Range's radar system. To meet critical safety requirements, it is essential that the transponders provide the highest quality performance. Radar transponders provided by the Range are acceptance tested satisfying most test requirements. The nominal lead time for transponder procurement is one year. Some test environments, however, require special environmental testing and possibly unique transponders. In these cases, the lead time for transponder procurement would be longer.

**GLOBAL POSITIONING SYSTEM INSTRUMENTATION\*:** The Global Positioning System (GPS) and Timing Branch of the Data Collection Division operates GPS sensor equipment that collects Time Space Position Information (TSPI) for various Test platforms, both ground and airborne. The Branch is also responsible for operating and maintaining the Range Timing equipment that is GPS timing based. The GPS sensors that are utilized include the:

- Advanced Range Data System (ARDS)
- ARDS Lite
- Differential Corrections Broadcast
- L1/L2 Reference Receiver Data Collection

**TIMING INSTRUMENTATION\*:**The WSMR timing system generates and distributes time code formats that conform to the Inter Range Instrumentation Group (IRIG) standard time formats as described in the current Range Commanders Council (RCC) Document 200. The timing system master station is located in the south range. It's time standard is referenced to the Universal Time Standard (UTS) maintained by the US Naval Observatory. Radio systems transmit timing signals throughout WSMR to avoid the propagation errors of long wire lines. Secondary timing stations are located at optimum sites. The majority of these stations are fixed. Mobile secondary timing stations serve isolated areas on a temporary basis. The secondary timing stations are referenced to the master station time standard and generate timing signals, translate timing signals, distribute the signals by wire line or radio, and serve as RF distribution system relays. A single station usually performs several of these functions. Individual customer requirements are satisfied through the selection of terminal equipment to buffer or reconfigure the timing signals.

**OPTICAL INSTRUMENTATION\*:** White Sands is home to one of the largest and most diverse matrix of photo-optical instrumentation in the Department of Defense. The optics instrumentation array consists of Multimode Automatic Tracking Systems (MATS), Versatile Tracking Mounts (VTM) and a version of the Contraves-developed Kineto Tracking Mount (KTM). The KTM collects video data of the tracked object's image, azimuth and elevation angles. The Battlespace Real-time Video System collects video from elevated gimbal units on towers. Data collected also includes attitude, event, and miss distance information. Other applications include radiometry, laser detection and analysis, night operation, and low-cost sacrificial high speed target interior imaging. The optical instrumentation array is complemented with the Distant Object Attitude Measurement System (DOAMS), Launch Area Theodolite

Systems (LATS), mobile telescopes, fixed cameras, and closed circuit television. Data collection cameras can operate at frame rates from 20 to 2000 frames per second. High speed film imagery has been phased out and high speed digital video has been phased in to most of the data collection instrumentation.



**METEOROLOGY INSTRUMENTATION\***: The White Sands Meteorology Branch (Met Branch) provides a wide range of technical meteorological support for WSMR test operations and related activities. Along with its primary purpose of mission support, the Met Branch issues public service-type weather forecasts and warnings.



The Met Branch has an extensive array of facilities and instrumentation to provide these services, along with the skilled personnel needed to conduct Met operations. The Meteorology Branch can provide mission specific weather forecasts, weather threat matrix, surface and upper air observations, climatology (planning) and specialized modeling products.

Customer support includes written responses to the Universal Documentation System (UDS), analysis of customer requirements, development of support plans and cost estimates utilizing Microsoft Project. Functions include but are not limited to:

- Coordinating and scheduling all meteorological assets required.
- Analysis and delivery of "quick look" data to customer to insure that the data are accurate, consistent, and timely for the mission.
- Preparation of standard post mission meteorological reports.

The Forecast and Data Sections operate as required to support all missions coded by the Range Scheduling Office. Customers can be provided the following:

- Mission specific Weather Forecasts for site specific five day outlooks with customer designed threat matrix depending on mission sensitivities.
- Upper air soundings up to 100,000 feet MSL.
- Severe weather warnings and lightning watches are provided range wide. Forecasts of hazardous weather such as, severe thunderstorms, heavy snow warnings and wind and dust storms are issued to give enough lead time to prepare and prevent injury to personnel or infrastructure.

- Impact prediction for partially guided and unguided rocket: Launcher elevation and azimuth angles are calculated in real time to predict rocket impact as required by Flight Safety.

Climatology records including 50 years of surface observations are used to plan for specific customer requirements. The following reports are available to the customer:

- *The “Quick Look” Report* includes surface and upper air data and is available within minutes after completion of the measurement. This is often provided directly to the project at the remote field site for go no-go decisions and to expedite mission requirements. These data are not completely quality controlled.
- *The Upper Air Sounding Report* is quality controlled and consists of several formats:

SH 1	Standalone that contains significant level upper air data geometric height, pressure, temperature, relative humidity, dew point temperature, Mixing ratio.
SH 2	In 1,000 foot layers to required altitude provides altitude, wind speed and direction, wind shear, temperature, dew point temperature, relative humidity, absolute humidity, density, velocity of sound, vapor pressure, precipitable water.
SH 4	In 500 foot layers to required altitude provides altitude, wind speed and direction, wind shear, temperature, dew point temperature, relative humidity, absolute humidity, density, velocity of sound, vapor pressure, precipitable water.
	Computer and ballistic aiming met messages are products available from the upper air sounding.

- The Meteorology Branch operates sixty fixed systems consisting of surface tower mesonets, upper air measurement systems, radar wind profilers, WF-100 wind finding radars, lightning detectors across the range. There are approximately twenty mobile systems comprised of towers, trailers, and tethersondes. The branch has the latest technology in weather modeling, rocket impact prediction, and object drift prediction.
- This instrumentation allows the technicians to measure and calculate critical atmospheric parameters in real time. The meteorologist can then provide the customer with mission specific weather forecast, warnings, advising, rocket impact prediction, chaff drift predictions and climatology.

**MOBILE RANGE INSTRUMENTATION:**

**TRANSPORTABLE RANGE AUGMENTATION AND CONTROL SYSTEM (TRACS):** The TRACS is a self-contained transportable system to support mission preparation, execution, real-time data collection and processing, mission control, flight safety, and quick-look post mission data analysis.

TRACS can be used in two mission configurations: The Augmentation Configuration, which allows augmenting existing range capabilities; and the Stand-Alone Configuration which provides complete autonomous support at remote locations.

There are two functionally identical control vans, designated as TRACS 1 and TRACS 2. The TRACS have supported operations at the Ft. Wingate launch facility and at Kodiak Alaska.

## **ARMY AVIATION INSTRUMENTATION:**

The Army Air safe professional crews have the experience you need to accomplish your test support. Our specialty is aircraft test support. The bulk of our services are provided routinely to WSMR customers in the desert and mountains that encompass WSMR, New Mexico and southwest United States. Our expert maintenance staff is capable of adapting your test equipment to our aircraft. Structures, avionics, and quality assurance technicians specialize in interfacing project electrical and structural components with aircraft systems. Special equipment and components can be mounted both internally and externally to meet customer requirements.



### **● TYPICAL SUPPORT MISSIONS:**

- Aerial tracking flights and test platforms
- Recovery and sling load operations
- Cargo and hazardous cargo transport
- Mission essential personnel transport
- Aerial reconnaissance and photography
- Sensor Package Test Platform
- Expendables Platform (Flare/Chafe)

### **● AIRCRAFT FLEET:**

- one Beech King Air 200 (C-12)  
Fixed Wing Aircraft
- six UH-1H (Bell 205) Helicopters

- **OBTAINING AIRCRAFT SUPPORT:** When considering aviation support for your project on White Sands, your Test Officer can contact our Operations Division. They can answer your questions concerning aircraft utilization. Early coordination for aircraft support is encouraged.

## **TARGET CONTROL INSTRUMENTATION:**

Aircraft systems are flown as tests of air defense weapons systems and can simulate an attacking aircraft in close formation. This enables weapons systems to perform friend or foe target discrimination among multiple targets. In addition, Unmanned Aerial Vehicles (UAV) and Unmanned Ground Systems (UGS) are remotely operated for use as weapons systems and targets. Software development enables flight/ground-pattern generation for Unmanned Aerial Systems (UAS) to follow.

- **DRONE TARGET CONTROL SYSTEM (DTCS) AND DRONE FORMATION CONTROL SYSTEM (DFCS):** WSMR uses two types of systems to control targets: The Drone Target Control System (DTCS) and the Drone Formation Control System (DFCS). The DTCS is used with specially equipped radars that provide the link to the drone. The DTCS can be used with a radar, a mobile van to support takeoffs and landings, and a transportable system for off-range support. These systems can control sub-scale, full-scale, rotary, and fixed-wing aircraft. The DTCS can control two aircraft. It is a continuously manned control system and it has the advantage of quick target presentation without rehearsal requirements. The DFCS is used for ground vehicles and sub-scale and full-scale fixed-wing drone operations. The DFCS can track and control up to 48 ground vehicles or six aerial targets simultaneously in formation or in

precise synchronized flight patterns, while tracking four additional targets. The DFCS has an automatic takeoff and landing capability for most full-scale aerial targets. It can provide a 90 second interval between target launches from Holloman Air Force Base to maximize on-station time for multiple target formations. This system is capable of manual or automatic track and the control of single or multiple aerial or ground target presentations. The DFCS can currently control domestic and foreign ground vehicles (i.e T-72 tanks), and BQM-34, MQM-107, QF-4 small and full-scale drones equipped with transponders. Time-Space-Position Information (TSPI) is available in real time on all targets.

Systems are remotely controlled from the Cox Range Control Center and their data is transformed by the Real time Data Processing System (RDTPS) into required formats. The processed data can then be distributed via Defense Research and Engineering Network (DREN) to locations internal or external to the Range.

## **DATA DISTRIBUTION SYSTEMS:**

White Sands has state-of-the-art data distribution capabilities to support your mission including the Inter-Range Control Center, Test Support Network, telephone and radio systems, and network communications. In addition, the Range is fully equipped with first-rate hardware and software systems to analyze system performance and provide post test data reduction.

## **NETCENTRIC COMMUNICATIONS:**

- **INTER-RANGE CONTROL CENTER (IRCC)\*:** WSMR is home to The Inter-Range Control Center, established as the Army Test and Evaluation Command's (ATEC's) master control facility for distributed test support. The IRCC is a state-of-the-art control facility built and operated through the teamwork of hundreds of technical experts from throughout ATEC's developmental test, operational test, and evaluation communities.

IRCC is designed to support network-centric, system-of-systems testing in a live, virtual and constructive (LVC) environment for emerging programs such as the Future Combat Systems (FCS). History has shown that technology can act as a major force multiplier. The 21st century warfighter is looking to exploit technology wherever possible to speed up the delivery and implementation of systems. To test, train and experiment within the increasingly complex battlefield environment, the ability is needed to manage, synchronize and distribute large amounts of information arriving from a diverse—and often geographically disparate—collection of sensors deployed on a variety of platforms. The joint nature of the modern battlefield also demands rapid multi-Service integration of systems.

To meet these requirements, ATEC established Distributed Test Control Centers (DTCCs) at each of its test centers, with the IRCC serving as the WSMR DTCC and as ATEC's master control facility.

- **TEST SUPPORT NETWORK INTERNET PROTOCOL (TSN-IP)\*:** The White Sands Test Center is currently installing a Test Support Network on the test range. This system consists of a digital fiber optic network that supports transmission of analog and digital voice, data, telemetry, and video signals and can accommodate up to 600 simultaneous voice conferences. It also includes a network management system that provides automated network management and control.

All White Sands range assets will utilize one common digital transport system. The network ring architecture will provide a high speed, secure, range-wide information transport system that will support instrumentation testing of weapons, space systems, subsystems, and components, from 3000 surveyed sites and the synthetic environment.

Upon completion the Test Support Network, it will have the capacity to connect to any other range through a Norton SL-100 switch gateway provided the other range is similarly connected to a gateway via long haul commercial telecommunications carriers.

The range possesses extensive capabilities and infrastructure used by the Army, Navy, Air Force, NASA and other government agencies as well as universities, private industry and foreign militaries. In order to meet the needs of its customers and comply with the Army Transformation directives to provide a ubiquitous netcentric environment, WSMR has a requirement to implement and migrate to a Global Information Grid (GIG) network model. The model employs the GIG view of Enterprise Services (GIG-ES) that are defined by system of systems views and network of networks.

The scope of this project will be limited to the design and implementation of a GIG compliant network. Range instrumentation systems will be made network capable and transitioned on to the TSN-IP. Based on GIG compliance, the network will be capable of supporting users that exercise their network services during testing and in joint exercises. Network services development of range instrumentation is beyond the scope of this project and will be future efforts

**TELEPHONIC COMMUNICATIONS:** The WSMR telephone system can provide all standard PBX features. The system can support switched 56 Kb/s circuitry. There are also three transportable switches that are deployed to remote range areas to support short-term non-recurring telephone service requirements. Although the telephone system is government owned and operated the WSMR system interfaces with the commercial telephone network via trunking to Las Cruces, New Mexico for inter-range and worldwide DISN/DDN connections. Also, the WSMR telephone system has trunking to the Digital Switched Network (DSN); Federal Telephone System, Fort Bliss, Texas; Holloman Air Force Base and surrounding communities. A fixed communications plant provides data transmission and voice communications service to over 1,500 range stations. Commercial communications facilities are leased for information transfer between WSMR and off-range sites.

#### **RADIO COMMUNICATIONS:**

- **VHF AND UHF COMMUNICATIONS:** VHF and UHF ground-to-air communication radios are located at Salinas Peak, Clark Site, King-1, C-Station, Stallion, and

North Oscura Peak. This radio system uses the air traffic control standard aircraft radios. This capability provides WSMR with voice communications to all aircraft involved in range activities.

- **MOBILE RADIO SYSTEM:** Mobile radio systems are used extensively at WSMR for coordinating the efforts of Field personnel, optimizing the use of vehicles and mobile instrumentation, and for range customer communications. There are mobile units, base stations, repeaters, and portable radios. Many radio nets are repeater operated with one or two repeaters, several base stations, and many mobile units. A portable radio pool is maintained for use where communications support does not exist. There are programmable hand held radios available for use on share nets. These radios are also available for use on regular established nets. They may be reprogrammed to net frequencies that are within the radio frequency band. One hundred watt programmable mobile radios, batteries, antennas, and other accessories are also available.

**NETWORK COMMUNICATIONS:** Information Assurance (IA) requirements such as LAN and SIPRNET usage are generally approved by the Data Sciences Directorate.

- **THE LOCAL AREA NETWORK (LAN)** is the primary information system for the organizations and personnel assigned to WSMR. The WSMR LAN is a United States (US)-only system used for processing of unclassified sensitive information. The WSMR LAN may never process classified information of any kind. Sensitive information may include (but is not limited to) research, development, and engineering data; logistics; medical care; personnel management and Privacy Act data; contractual data and certain categories of financial data (such as payroll data); For Official Use Only (FOUO) information; and export-controlled information in accordance with the Arms Export Control Act.
- **THE SECRET INTERNET PROTOCOL ROUTER NETWORK (SIPRNET)** is the primary classified administrative information system used by organizations and personnel assigned to WSMR. It is a US-only system used and approved for processing Secret collateral information. SIPRNet is not authorized for processing of Top Secret or Top Secret/SCI information and/or data nor is it accredited for transmission of NATO material.  
Access to the WSMR network is for official use and authorized purposes and as set forth in DoD 5500.7-R, "Joint Ethics Regulation" or as further limited by the WSMR Acceptable Use Policy. This policy further applies to all Federal Government communication systems, equipment (including telephones, facsimile machines, electronic mail, internet systems, and commercial systems), and other communication resources when the Federal Government pays for the use of these resources. Policy applies to all information systems, stand-alone information systems, restricted enclaves, and networks at all information classification levels.

**FREQUENCY UTILIZATION AND MANAGEMENT COMMUNICATIONS\*:** WSMR performs frequency surveillance, evaluation, and radiation analysis, and control

of the use of all radio frequencies. Frequency scheduling is performed on a daily basis. All frequencies used in connection with range missions are monitored. Transmitter, receiver, and antenna frequency spectrum usage and electromagnetic propagation are analyzed to develop interference tolerances, interference reduction and prevention programs, and to identify radiation hazard distances from emitters. Frequency surveillance (both fixed and mobile) is provided within 150 miles radius of WSMR Headquarters and in portions of Colorado and Utah. Additional services include operational electronic counter-measures control and resolution of interference problems.

**DATA ANALYSIS SYSTEMS\***: As the complexity of the testing continues to grow, our range instrumentation and support elements keep up with state-of-the-art technology by upgrading systems, test equipment and test processes. The Range is fully equipped with first-rate hardware and software systems to analyze system performance including Reliability, Availability and Maintainability (RAM), Manpower and Personnel Integration (MANPRINT), Human Factors Engineering (HFE), and warhead assessment. WSMR has an exceptional post test data reduction capability to meet our customers' needs.

**RELIABILITY, AVAILABILITY AND MAINTAINABILITY (RAM)\***: A major factor that determines the sustainability of a system is Reliability, Availability and Maintainability (RAM). Performance of today's military mission depends on the synergy of net centric aggregated subsystems. These systems and the personnel that operate them are being asked to perform at op-tempos not seen before. To meet mission availability goals, threshold RAM requirements must be levied on a proposed system with data collected during development in order to provide a quantitative analysis. RAM analysis determines whether equipment performs its intended functions for a specified time interval under controlled conditions. Integrated Logistics Support (ILS) is the process of acquiring the necessary system support package to provide the user with operational support at the least possible cost for the system when delivered to the soldier in the field. WSMR has the expertise to meet RAM and ILS customer requirements.

Weapons system performance is assessed at the SANDS Technical Data Center (STDC), a state-of-the-art computing facility that provides hardware and specially developed software applications. A complete spectrum of analysis from video capture and telemetry data reduction needed in target characterization to the detailed analysis of discrete network traffic is available for determination of the overall integrated system performance.

**MANPOWER AND PERSONNEL INTEGRATION (MANPRINT)\***: MANPRINT capabilities include test and evaluation of the three domains of Human Factors Engineering (HFE), system safety, and health hazards during the conduct of developmental testing and operational testing of weapon systems including: air defense systems; land combat weapon systems; communications, command, and control systems; and tactical fire control systems.


**HUMAN FACTORS ENGINEERING (HFE)\***: HFE evaluations include an assessment of the conformance of the weapon system under test to the applicable

provisions of MIL-STD-1472, *Human Engineering Design Criteria for Military Systems, Equipment, and Facilities*. HFE tests are performed in accordance with Army approved Test Operation Procedures (TOPs), such as Top 1-2-610, *Human Factors Engineering Test Procedures*.

Our capabilities include performing system safety evaluations of weapon systems and providing safety release recommendations. These recommendations are documented and provided to Developmental Test Command (DTC) permitting soldiers to participate as operators and maintainers in the testing of a weapon system and delineating safety limitations to the test activities.

In addition, WSMR has extensive experience in test and analysis of systems containing mission critical system software.

**WARHEADS\***: Warhead testing support ranges from Test Officers responsibilities, and conduct and reporting of specific tests, to planning and coordination, test set-up and preparation, test conduct, data collection, data analysis and evaluation, and test reporting. Testing capabilities include but are not limited to a wide range of technical tests, insensitive munitions tests, specialized one-of-a-kind tests, and special studies pertaining to explosive safety hazards. The Branch also has extensive expertise in the areas of explosive materials behavior; shaped charge, acoustics and pressure measurements, fuzing, safety and arming devices, conventional and self-destruct submunition technology, and environmental impact concerns and special studies.

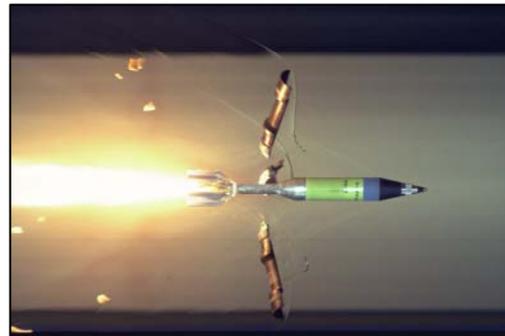

The majority of the test and evaluation effort is geared toward determining the safety, functional reliability, and performance characteristics of warhead sections and their associated components for a variety of systems. The types of tests and operations conducted include impact area data collection operations, safe and arm device centrifuge certification tests, high-explosive detonations, bullet impact, conflagration, 40-foot drop tests, sympathetic detonation, slow and fast cook-off, arena and other specialized tests related to safety testing. WSMR also conducts diagnostic testing which includes explosive train propagation, downloading of warheads and explosives, remote control cutting and steaming of explosive components, and assembly/disassembly checkouts of warhead sections and their associated components.

The WSMR Test Ammunition Storage Point (ASP) is available and performs all actions to receive, store, safeguard, issue, ship, and deliver inventory and report ammunition and explosives. The ASP also provides technical advice and assistance to all Test projects, units, and activities. The WSMR ASP maintains the ammunition stock record account recording all receipts, issues, inventory adjustments, turn-ins, suspensions and out shipments of ammunition.

**POST TEST DATA REDUCTION\***: There are a variety of standard data products available at WSMR. The primary post-test data product categories include Trajectory and Attitude, Miss Distance, Surface Miss Distance, and Target Motion Resolution. Video data and limited flight data are also available in near real time. Non-standard

product types are available, but must be coordinated through the Test Officer with sufficient lead time for product development.

**VISUAL INFORMATION (VI) PRODUCTS\*:** The VI organization provides audiovisual support services for your mission and general support requirements. Services include still digital media for documentation, high definition digital and analog video for documentation and production, digital/HD online editing, media reproduction, graphic arts, and imaging and photo printing. VI also operates a DISN video teleconference center, performs video teleconferencing installation and maintenance, and provides mobile video teleconferencing services.

## **FACILITIES AND LABORATORIES:**

WSMR maintains highly specialized range technical facilities and laboratories to support the continuing testing of tri-service, DOD, NASA, foreign and commercial systems. The Survivability, Vulnerability, and Assessment Directorate (SVAD) at WSMR is a recognized center of expertise for testing and offers a one-stop capability by providing facilities/laboratories, project engineering, test execution, analysis and documentation. The major nuclear weapon effects test facilities have laboratory Suitability certifications and ionization facilities are ISO 9000 certified. The following paragraphs explore the SVAD nuclear weapons effects, electromagnetic environmental effects (E<sup>3</sup>), directed energy (DE) effects, space effects, high power (HP) electromagnetic environments, effects, life-cycle management, applied environments. In addition, information is provided on the Climatic Test, Dynamic Test, and Aerial Cable Facilities, and the Metallurgy and Chemistry Laboratories.

## **NUCLEAR WEAPONS EFFECTS \*:**

- **WHITE SANDS SOLAR FURNACE (WSSF):** The WSSF simulates the nuclear thermal radiation environment by producing high-fidelity intense thermal pulses (1 kT to 3 MT). It can also produce a steady state thermal radiation exposure of very long durations (i.e. daylight hours for experimentation). At full power, the energy generated by the WSSF can penetrate a half-inch stainless steel plate in 40 seconds.
- **RELATIVISTIC ELECTRON BEAM ACCELERATOR:** The Relativistic Electron Beam Accelerator (REBA) (1.9MeV) and PI 538 (4.2 MeV) is a high-energy, pulsed, field emission electron beam or Bremsstrahlung x-ray source. The REBA and PI 538 Facilities are Flash X-ray simulators that produce the gamma dose rate environments of a nuclear weapon detonation. Both provide an energy source of short duration for determining electronic equipment and system responses to rapid and in-depth energy deposition. These two facilities provide instrumentation for real-time data acquisition of the test item response and environment, and is a particularly cost-effective means of testing relatively large items.

- **COMPACT FLASH X-RAY SIMULATOR (CXS):** The CXS is a mobile simulator that provides three different pulsed, Bremsstrahlung sources of gamma photons (~750MeV), (500-650 MeV) and (450 MeV) for gamma dose rate testing of equipment and small systems.
- **LINEAR ELECTRON ACCELERATOR:** The Linear Electron Accelerator (LINAC) is designed to simulate the high-intensity gamma spike associated with a nuclear weapon detonation by producing high-intensity, short-duration pulses of high-energy electromagnetic radiation for threat level exposures. It is normally used to gamma dose rate test electronic devices and components, and to evaluate detection thresholds of power removal circuits.
- **GAMMA RADIATION FACILITY:** The Gamma Radiation Facility (GRF) is designed to provide the total gamma dose and residual gamma dose environments needed for nuclear effects testing of virtually any size item. The GRF has four 15 kCurie Cobalt-60 sources that can be used in any combination to provide an environment for transient radiation effects on electronics (TREE) experiments as well as verification tests of systems for gamma dose survivability. However, the uses of the GRF are diverse, including radiography and shielding experiments, as well as calibration and operational testing of military radiac instrumentation.
- **RADIATION CORRELATION LABORATORY (RCL):** The RCL provides gamma environments (Cobalt-60 and Cesium-137) for realistic evaluation of performance of radiation detectors and sensors. It is also used to determine shielding characteristics of vehicles.
- **FAST BURST REACTOR:** The Fast Burst Reactor (FBR) is an unmoderated and unreflected cylindrical assembly of uranium and molybdenum alloy that is centered inside a 50' x 50' x 20' high cell. The FBR, covered with a boron-lined aluminum shroud to decouple the core from experiments, produces high-yield pulses of microsecond ( $\mu$ s) width, as well as long-term, steady-state radiation to simulate the neutron radiation environment produced by a fission weapon.
- **SEMICONDUCTOR TEST LABORATORY:** The Semiconductor Test Laboratory (STL), through a complete array of state-of-the-art test equipment and the capabilities of the people behind that equipment, is able to exercise virtually any semiconductor component or piece-part in the military's inventory. The STL enables all types of discrete, active and custom semiconductors to be characterized and then tested by exposure to the appropriate initial nuclear radiation (INR) environment. Due to a rapid transfer system between the four INR facilities and STL, detailed post-exposure characterization of test samples



can be initiated within two minutes of exposure. More than a dozen experienced engineers have characterized and tested more than 5,000 different types of electronic devices during the past 13 years. Parametric characterizations are performed on the following mainframe testers: Teradyne A575 (2 each Teradyne FLEX); Teradyne A580 (2 each Teradyne J750); and Teradyne MicroFLEX (3 each Credence Testers).

- **RAPID RESPONSE LABORATORY (RRL):** The RRL consists of five bench-top stations that enable most types of active semiconductors and components, circuit card assemblies, small system characterization, testing to appropriate INR environments, and post-test analyses.

**ELECTROMAGNETIC ENVIRONMENT EFFECTS:** Survivability/Vulnerability (SV) Directorate operates extensive Electromagnetic (EM) Environmental Effects (E3) Test Facilities at one 16-acre test complex to meet the requirements of MIL-STDs 461 and 464 and ADS-37. SV E3 test and evaluation capabilities include: Electromagnetic Radiation (EMR) Operational, Intra-system, and Inter-system; Electromagnetic Compatibility (EMC); Electromagnetic Interference (EMI); Personnel Electrostatic Discharge (PESD); Helicopter Electrostatic Discharge (HESD); Precipitation Static (PS); and Electromagnetic Radiation Hazards (fuel, ordnance and personnel).

- **ELECTROMAGNETIC RADIATION (EMR) FACILITIES:** Using any or all of five separate transmitters at its EMR facilities, WSMR can provide both EMR Operational (EMRO) and EMR Hazard (EMRH) whole-body, open-space testing. Frequencies range from 100 kHz to 18 GHz, at power levels to 50 kW, depending upon the specific transmitter and test environment. EMRO testing ensures that weapon systems will perform their intended missions while exposed to electromagnetic radiation. EMRH testing ensures that electro-explosive devices will not unintentionally detonate from current induced by an electromagnetic field.
- **ELECTROMAGNETIC INTERFERENCE (EMI) FACILITIES:** WSMR Survivability/Vulnerability Directorate conducts EMI testing to precisely measure the EM emissions from a system and to subject the test item to external RF signals to determine the item's susceptibilities to EMI. At either of the two facilities, the WSMR Survivability/Vulnerability Directorate can perform entire batteries of EMI testing, including radiated emissions, radiated susceptibilities, conducted emissions, and conducted susceptibilities, to applicable military standards (MIL-STDs).
- **ELECTROSTATIC DISCHARGE (ESD) FACILITY:** Electrostatic discharge (ESD), or static electricity, as it is commonly known, can be potentially devastating to sensitive electronics. To ensure that weapon systems are hardened against damage from ESD, the WSMR Survivability/Vulnerability Directorate has the capability to perform both personnel-level (25,000 volts direct current [VDC])

and helicopter-level (350,000 VDC) ESD testing. Both tests are performed in accordance with TOP 1-2511.

- The personnel-level ESD simulator is hand portable, which allows for discharge at any point on a system under test. Helicopter-level tests are performed by placing the item under test on nonconductive blocks, attaching one pole of a DC power supply to the item, and bringing a ground wand near enough to the test item to discharge the electrical charge. Both personnel-level and helicopter-level ESD testing are done on a go/no-go basis; i.e., a system passes if it remains operational and safe after exposure to the ESD; otherwise, the system fails.

#### **DIRECTED ENERGY WEAPONS EFFECTS\*: LASER FACILITIES:**

- **PULSED LASER VULNERABILITY TEST SYSTEM (PLVTS):** Pulsed Laser Vulnerability Test System (PLVTS), the largest pulsed CO<sub>2</sub> laser in the U.S., is designed to support susceptibility and vulnerability testing of electro-optical/infrared (EO/IR) tactical weapon systems. Fully transportable and self-contained, PLVTS is capable of providing tactical threat environments at virtually any test range in the world.
- **THREAT LASERS:** Agile and eye-safe lasers are available for component or system level testing.
- **ADVANCED POINTED TRACKER (APT):** The APT is instrumented with a 60-cm diameter optical tracker or beam director. It is mobile with two optical benches and enables dynamic testing at the system level and at great distances.
- **SEA LITE BEAM DIRECTOR (SLBD):** The SLBD is a beam director that can be used as an optical tracker for very high energy lasers.

#### **HIGH POWER MICROWAVE FACILITIES:**

- **NARROWBAND (NB):** a complete suite of NB environments is segmented into four major capabilities:
  - 36 1-MW magnetrons, 50 selectable frequencies each, providing continuous frequency coverage from 1.2 to 39 GHz.
  - One 175-240 kW 3-tube system providing continuous frequency coverage from 140-1000 MHz.
  - Six 70-350 MW SuperReltron Tubes providing 50 kV/m @ 15 meters between frequencies of 670-3000 Mhz.
  - One 1000-1600 MHz narrow pulsewidth system providing narrow pulsewidths and high energy for testing digital systems.
- **WIDEBAND:** Wideband is available in two major capabilities:

- One portable 150-270 MHz bandwidth unit
  - One 200-6000 MHz unit divided into nine bands.
- **ULTRA-WIDEBAND:** Ultra-Wideband is available in one large system level test facility that can provide 35kV/m @ 50 meters across a tank size system. The frequency coverage is 670-4300 MHz.

**SPACE EFFECTS:**

- **COMBINED RADIATION ENVIRONMENT (CRE) FACILITY:** The CRE facility consists of two simulators (PI 538 and reactor) that provide a time-tied radiation environment to simulate different upper atmospheric radiation scenarios.
- **ELDORADO IRRADIATOR FACILITY (EIF):** The Eldorado Irradiator Facility is used for gamma dose simulation testing of electronic devices and circuits. The facility is capable of providing dose rates between 50 and 0.01 Rad-Si/sec in the direct beam with no attenuation. The Eldorado can also operate in an extended operation mode 24/7 to fulfill the unique requirements of Enhanced Low Dose Rate Sensitivity tests for Space irradiations or aluminum attenuators; lower dose rates are achieved.

**HIGH POWER MICROWAVE ELECTROMAGNETIC ENVIRONMENT EFFECTS:**

- **HORIZONTALLY POLARIZED DIPOLE II (HPDII):** The HPDII EMP simulator is a fast rise time free-field EMP simulator used for system-level testing to the Early-Time HEMP Waveform of MIL-STD 2169B. A second pulser provides a mobile capability and is routinely requested by customers to be set-up at remote sites for testing. The mobile HPDII consists of a lowboy trailer used to transport the pulser, antenna and a data acquisition trailer.
- **ADVANCED HPD (AHPD):** A 3.5 MW pulser combined with a wire-spread antenna system provides system level testing and meets MIL-STD 2169B Early-Time HEMP Waveform.
- **VERTICAL HEMP FACILITY (VHF):** A VHF using a 2.0 MW pulser is being developed to provide the Early-Time HEMP waveform and is scheduled to be operational in late 2010.

- **LIGHTNING TEST FACILITY:** The Lightning Test Facility (LTF) is comprised of two different co-located capabilities that simulate both the direct and indirect effects of lightning strike characteristics. For a direct strike, a high



current capacitor bank capable of producing Component A (218 kAmps) and Component D (50 kAmps) is available to test systems. A second facility with a 2.4 MV capacitor bank is available to simulate the environments of a near strike environment for system testing. Direct effects of lightning include burning, eroding, blasting, and structural deformation caused by lightning arc attachment, as well as by the high-pressure shock waves and magnetic forces produced by the associated high currents. Indirect lightning effects are predominantly those resulting from the interaction of the electromagnetic fields accompanying lightning with electrical devices. Engineers have developed a lightning effects test capability in accordance with MIL-STD-1757A, which establishes standards for the waveforms used to determine direct and indirect effects of lightning strikes.

- **PULSED CURRENT INJECTION FACILITY (PCIF):** The MIL-STD 188-125 PCIF is fully capable of meeting required specifications for EMP testing of all types of systems.
- **RS 105 FACILITY:** The RS 105 Facility is available to provide the transient environments of MIL-STD 461E of equipment and small systems.

#### **LIFE-CYCLE MANAGEMENT:**


**RADIATION TOLERANCE ASSURED SUPPLY AND SUPPORT CENTER (RTASSC):** The RTASSC is an ISO 9002 certified service-oriented supply and support center dedicated to assist military and space system program offices with diminishing manufacturing sources and material shortages, proactive and reactive management and solutions and radiation tolerance (RT) “cradle-to-grave” lifecycle management and solutions.

**APPLIED ENVIRONMENTS:** Applied Environments are used to determine if systems can effectively operate in diverse real world conditions. The Survivability/Vulnerability Directorate can subject an entire system to extreme low and high temperature environments in climatic test facilities. Four large test chambers, with the largest being 105’ long X 40’ wide X 60’ high, are available for hazardous climatic testing of very large systems. Temperature tests can be run on complete systems or individual components. A very large solar heating chamber (70’ long X 40’ wide X 40’ high) is available for solar loading of large systems. The capability also exists to expose both the system and its components to rigorous dust, wind, fungus and other phenomenon. Shock and vibration facilities that duplicate typical life cycle environments are on-hand as well. Launcher dynamics are accessible to instrument large missile launchers at the launch site.

#### **CLIMATIC TEST FACILITIES\*:**

- **TEMPERATURE TEST FACILITY:** The Temperature Test Facility (TTF), two miles from the main post area, has three permanent temperature conditioning chambers: The Large Test Chamber (LTC), The Small Test Chamber (STC), The Salt Fog/Humidity Chamber, where extreme temperature testing, temperature shock testing, and solar radiation testing is performed. When required and if the test

items are safety compatible, all three chambers can conduct testing simultaneously. The TTF is approved for hazardous testing of explosive test items up to 30,000 lbs of Class 1.1.

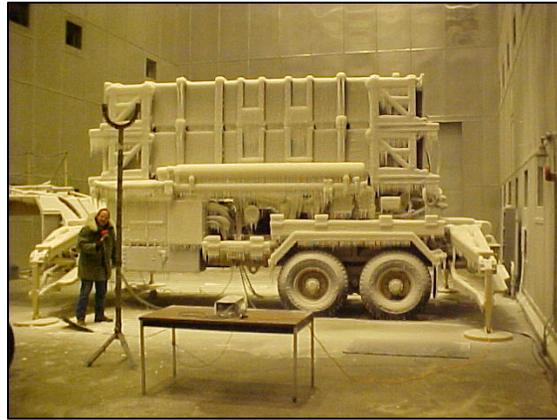

- **ENVIRONMENTAL TEST AREA II:** The Environmental Test Area II (ETA-II) located 1.5 miles from the main post area has multiple environment test facilities. ETA supports the following types of testing: fungus, high temperature, rain, wind, sand/dust, and small item temperature, humidity, salt and fog testing. Multiple tests can be conducted simultaneously
- **HOT CHAMBER:** The Hot Chamber located on the main post is has the ability of conducting high temperature, solar radiation, humidity, and salt fog testing on non-hazardous test items.
- **ALTITUDE CHAMBER:** The small multipurpose Altitude Chamber can generate altitude environments from 500 feet below sea level to 150,000 feet above sea level. Large test items are tested at Atom Peak, approximately 60 miles from main post. The chambers are certified for explosive test items.
- **IMMERSION TANK:** A transportable four-foot cubed leakage (immersion) tank is available for immersion depths of one meter.
- **CONDITIONING EQUIPMENT:** Portable conditioning equipment and shrouds are available for temperature testing anywhere at WSMR

**DYNAMIC TEST FACILITIES\*:** WSMR personnel assess and evaluate warheads and explosive devices to determine their lethality, reliability, vulnerability and hazards associated with handling and transportation.

- **DROP TESTS:** Tests include drop tests (up to 40 lbs), detonation propagation tests; slow cook-off tests; fast cook-off tests using JP-4, diesel or wood; insensitive munitions tests; and bullet impact tests.
- **CENTRIFUGE TESTS:** Centrifuge tests are conducted on safe and armed devices to measure arming devices and electrical parameters. Centrifuge tests emulate acceleration forces encountered during test flights.
- **WARHEAD ARENA TESTS:** Special Warhead Arena Tests are performed for pattern distribution, density, velocity, blast overpressure and fragment size and weight. Inspection and failure analysis of damaged or questionable rounds are accomplished by remote explosive disassembly, including cutting, coring and

steaming. Technical consultation for customized explosive testing is also available.

- **DYNAMIC TEST FACILITY:** The Dynamic Test Facility is approved for hazardous testing and consists of electrodynamics and electro-hydraulics test areas. The electrodynamics area includes three bays. One bay has four 18,000 lbf exciters which can be configured in push-push or push-pull arrangements. Up to eight exciters can be controlled simultaneously with the Multi-Axis Vibration Control System. A second bay contains the 3-D Exciter System. This system is capable of motion in three axes simultaneously with an output of 1000 lbf or it can be used as an 18,000 lbf single-axis system. The third bay is dedicated to shock testing with 60" x 60" and 12" x 12" machines. Loose cargo testing is performed on a 6000 lb. capacity Package Tester. The Electro-Hydraulics building contains three 4" and four 10" actuators capable of 40,000 lbf (dynamic) and 70,000 lbf (static). This system is currently under development and is designed to test entire vehicles by providing six degrees of motion.
- **WARHEAD IMPACT TARGETS:** Launch sites are strategically placed both on and off WSMR to provide flight distances ranging from approximately 7km to 300 km. The Warhead Impact Targets (WITs) are specifically designed and instrumented to support smart munitions /smart sub munitions (SM/SSM) programs in addition to a large variety of multiple cargo sub munitions programs. WITs are circular, vary in size from 4,200 ft to 10,000 ft in diameter and are grouped in two distinct categories. One category is used exclusively for tactical munitions configuration and the other category is used exclusively for munitions that might contain live detonators in fuzing system, but not contain an inert main charge.  
WSMR operates 11 Warhead Impact Targets (WITs) used for air-to-surface or surface-to-surface test missions.

**AERIAL CABLE FACILITIES:** Located in the north central area of the US Army's White Sands Missile Range, the Aerial Cable Range (ACR) is a tri-service DoD test facility managed by the Range Operations Directorate. The three-mile long Kevlar® cable suspended between two mountain peaks at the ACR is the longest unsupported cable span in the world. The cable, which can support up to 20,000 pounds, serves as a path for captive vehicles that can be rocket propelled or gravity accelerated at controlled speeds and predetermined altitudes above ground level. The ACR provides suspended cable testing in a controlled area with restricted airspace to support a variety of test programs including: missiles; prototype aircraft electronics; submunitions; bombs; sensors; electronic countermeasures and warning devices; and target and clutter characterization.

**METALLURGY LABORATORY:** The Metallurgy Laboratory is one of several non-destructive test laboratories available to perform specific evaluations of systems. The lab conducts metallurgical inspections to assess corrosion prevention and control, health hazards assessment and conformance, environmental testing and failure analysis of

explosive components. It is capable of supporting the following analyses of explosive and non-hazardous test items:

- Nondestructive evaluation (x-ray radiography).
- Scanning electron microscopy (SEM).
- Energy Dispersive X-ray analysis (EDX).
- Corrosion of engineering materials.
- Heat-treating.
- Failure analysis.
- Technical consultation

**CHEMISTRY LABORATORY\***: The Chemistry Laboratory is a modern, all purpose state-of-the-art facility with a varied menu of services for our Army, Navy, Air Force, NASA, Contractor, and Commercial customers. The scope of work within the facility is subdivided into two broad areas: Test Support and Environmental Analysis. Test Support services include:

- Conformance testing of material such as petroleum, oil and lubricants, breathing air, missile and rocket propellants;
- Explosives analysis of bulk material and breakdown products;
- Failure analysis of mal-performing systems that have a potential chemical cause;
- Toxic/noxious gas testing for incursion of missile and rocket exhaust by-products into crew cab breathing zones (man-rating);
- Special chemical problems for which no standard testing protocol exists.
- Organic, inorganic and forensics for hazardous analysis.




Environmental measurements are dedicated to the analysis of hazardous wastes, wastewater, ground and surface water, and soil in accordance with Environmental Protection Agency procedures. The laboratory has a full range of extraction and analytical equipment to perform

SW 1311 Toxicity Characteristic Leaching Procedure (TCLP) and analyses for volatiles (SW 8260), semi-volatiles (SW 8270), and metals (SW 6010B). Additional methodology includes measurements for corrosivity (SW 9040, 9045), ignitability (SW 1010), explosives (SW 8330), and PCBs in transformer oil (SW 8082 modified).

In accordance with ISO 17025, the Chemistry Laboratory maintains and utilizes a strong Quality Assurance/Quality Control program designed to demonstrate a high standard of accuracy, reliability, and impartiality is consistently applied to all environmental analyses. The Chemistry Laboratory is accredited to perform targeted environmental analyses in accordance with ISO 17025 and the National Environmental Laboratory Accreditation Program.

The laboratory utilizes modern analytical instrumentation to answer chemical questions in a centralized lab setting and also uses portable equipment for data gathering in the field. Instrumentation includes:

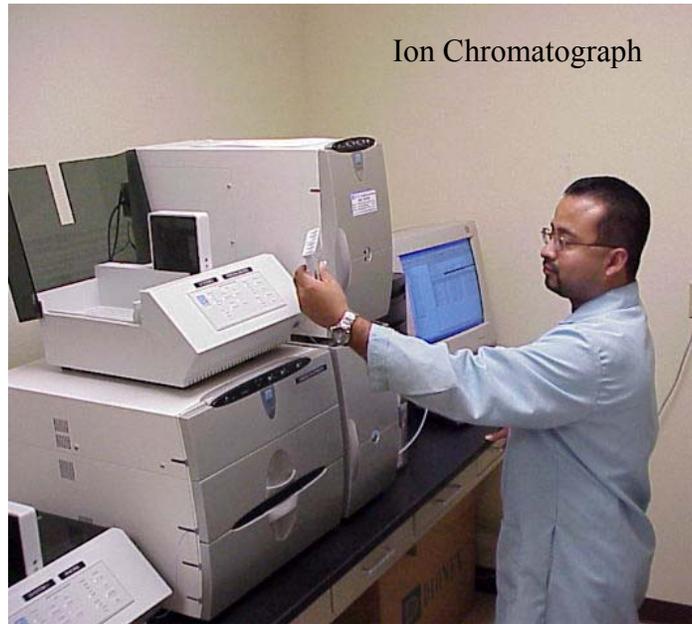


- Optima 4300 ICP/OES
- Elan 9000 ICP/MS
- Saturn 2200 Purge and Trap GC/MS
- Saturn 2200 semi-volatiles GC/MS
- High Performance Liquid Chromatograph
- MOA II Wear Metal Oil Analyzer
- Fourier Transform Infrared Spectrometer
- UV/VIS Spectrophotometer
- Ion Chromatograph
- Gas Chromatographs
- pH Meters
- Hydra AA Mercury Analyzer
- TCLP Extractors
- Automated & Semi-automated Flash Point Testers
- Analytical Balances
- Microwave Digester
- Laboratory Information Management System
- Portable Gas Analyzer

**TEAM WHITE SANDS MISSILE RANGE (TEAM WSMR):** As shown on the organization chart in the Range Organizational Structure section of this handbook, a number of organizations, which fall outside the WSMR Test Center, have established laboratories on the Range or at Holloman Air Force Base. These organizations are known as Team WSMR organizations. These resident organizations include: Port Hueneme Division Naval Surface Warfare Center Detachment White Sands (PHDNSWC - WS), The Air Force 46<sup>th</sup> Test Group Detachment 1 (Det 1, 46th TG), Future Combat Systems (FCS) Brigade Combat Team (BCT) Army Evaluation Task Force (AETF), National Aeronautics and Space Administration (NASA), Training & Doctrine Command (TRADOC) Requirements Analysis Center (TRAC), High Energy Laser Systems Test Facility (HELSTF), Defense Threat Reduction Agency (DTRA Army Research Laboratory (ARL), Center for Countermeasures (CCM), and National Geospatial Intelligence Agency (NGIA). A description of the support available from these agencies is included here as part of the overall WSMR capability.

**PORT HUENEME DIVISION NAVAL SURFACE WARFARE CENTER DETACHMENT WHITE SANDS (PHDNSWC - WS):** The Navy Detachment sponsors all Navy test programs tested at WSMR. The Navy has many unique test facilities supporting surface-to-air and surface-to-ground weapon testing, missile assembly, missile all-up round testing, and research rocket buildup and launch operations. These facilities are described in the following paragraphs:

- **LAUNCH COMPLEX 34 (LC-34)** was established as the land based test site for the Rolling Airframe Missile (RAM). This is a semi-hardened site used to flight test RAM against subscale and subsonic targets. The site is used to test various configurations of RAM missiles, weapon systems, support systems, and launchers.
- **LAUNCH COMPLEX 35 WEST (LC-35W):** LC-35W is known as the LLS-1 Desert Ship. All versions of STANDARD Missile (SM) have been tested at the Desert Ship including SM-2 Block II (Terrier, Tartar, AEGIS, and Vertical Launch AEGIS), SM-2 Block III/IIIA/IIIB (Terrier, Tartar, and Vertical Launch AEGIS), SM-2 Block IV (Extended Range Vertical Launch AEGIS), and SM-6. The SM-6 is being tested at Launch Complex 35 North (LC-35N). Other Navy systems that have been tested here include Sea Lance, NATO Seasparrow Missile (NSSM), and Vertical Launch ASROC (VLA). The Desert Ship functionally duplicates the fire control requirements of a surface ship and houses

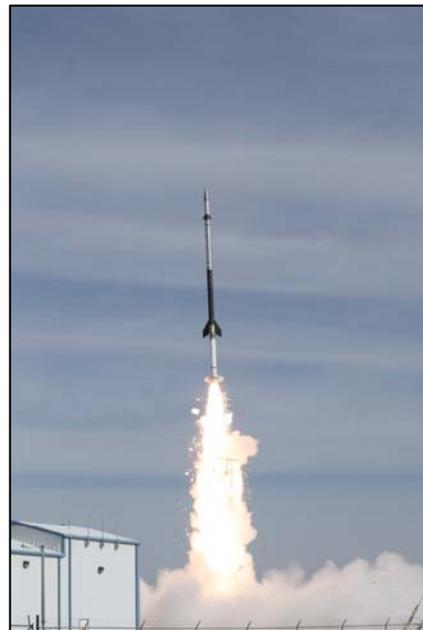

*A Terrier Black Brant sounding rocket is launched in support of a NASA mission to collect data on the sun. The data was then used to calibrate several solar observations satellites. Courtesy Photo*

dedicated telemetry, target monitoring, data extraction, and reduction systems.

- **LAUNCH COMPLEX 35EAST (LC-35E):** is a Research Rocket facility that includes a block-house, launch control equipment, and a payload assembly building. Current use of this facility is for NASA payload buildup, telemetry pre-launch and launch support, and uplink control of rocket payloads.
- **The MISSILE ASSEMBLY FACILITY (MAF):** is located south of Launch Complex 35. The main building is 19,000 square feet and has four assembly bays; two of which are configured with Type I 300 pound Net Explosive Weight Test Cells. This facility permits test and assembly operations on four different missiles at a time. In addition to the main facility, there are several single-bay facilities that can be used for ordnance buildup or as ready service magazines.
- **LAUNCH COMPLEX 36 (LC-36):** is used for launching suborbital rockets. The complex includes a blockhouse, launch control equipment, and four active launchers with environmental shelters. These launchers are; a 37 ft rail with 8,000 lb. capacity; a 48 ft rail with 25,000 lb. capacity; a 160 ft rail (tower) with 8,000 lb. capacity; and a 48 in. diameter stool with 50,000 lb. capacity (Aries class). In addition, a mobile launcher can support operations at other WSMR or off-range locations. The mobile launcher has a 30 ft rail with 15,000 lb. capacity.
- **LC-37 ADVANCED GUN MUNITIONS TEST SITE (SQUIRT SITE):** includes a concrete structure for housing various advanced gun systems, a permanent bunker and a concrete pad. The site has been used for Vertical Launching System restrained firings.
- **THE SULF SITE LAUNCH FACILITY COMPLEX:** is located at the northwest end of the Range and is equipped with a blockhouse and ordnance assembly building, three active launchers, and a 65 ft environmental shelter. The launchers include a 40 ft rail with 50,000 lb capacity, a 48-in diameter stool with 50,000 lb capacity (Aries class), and a dual-rail Vandal launcher.  
The complex is used to launch targets to support missile intercept testing and to launch technology demonstrators or unique science and engineering payloads into sub-orbital trajectories.
- **WEST CENTER 50 (WC-50):** is located in the central portion of the Range near Rhodes Canyon. This facility includes a hardened blockhouse that is used to support Navy and Army testing. The central location of this facility maximizes the ability to accommodate testing of short-range systems without a Flight Termination System (FTS).
- **THE INDUSTRIAL COMPLEX:** includes a full range of industrial and construction support with sheet metal, welding, electrical, and electronic shops. All services are available throughout the missile range. A full line of material handling capabilities is available including 40-ton and 60-ton mobile cranes.

**AIR FORCE 46<sup>TH</sup> TEST GROUP DETACHMENT 1 (DET 1, 46TH TG)\*:** 46th Test Group is composed of the following organizations: Detachment 1, 746th Test Squadron, 846th Test Squadron, National Radar Cross Section (RCS) Test Facility, 586th Flight test Squadron, and Operating Location (OL-AA) at Kirtland Air Force Base. The 46th Test Group is under the 46<sup>th</sup> Test Wing, Air Armament Center, Eglin Air Force Base, Florida.

- **46TH TEST GROUP DETACHMENT 1:** serves as the Air Force's liaison with WSMR, interfacing with the U.S. Army and Test Center organizations. In addition, the unit provides test sponsorship for all Air Force programs testing on WSMR, assisting test program customers in preparing the documentation necessary to execute tests as well as obtaining logistic and test support resources. Detachment 1 also schedules airspace for all Air Force tests and Air Force tactical training on WSMR.
- **746TH TEST SQUADRON (TS):** also known as the Central Inertial Guidance Test Facility (CIGTF), is the DOD's designated Responsible Test Organization (RTO) chartered to test and evaluate GPS user equipment (UE) and integrated GPS based guidance and navigation systems. With over 36 years of experience, CIGTF has established itself as a leader in Inertial, GPS, and blended GPS/Inertial components and system testing. By coupling our years of experience and expertise with state-of-the-art test and evaluation tools, CIGTF is ready to take on any test challenge. In addition, CIGTF's inclusive ground, field, and flight-testing capabilities offer the customer a cost-effective means to evaluate their guidance and navigation systems. In support of GPS testing, the 746th TS also manages the tri-service GPS Test Center of Expertise (COE) comprised of Army, Navy, and Air Force test agencies chartered to support GPS test and evaluation initiatives. The 746th TS is located at Holloman AFB and is adjacent to WSMR in southern New Mexico.

*An Air Force Officer examines a target dummy after a successful test of the Focused Lethality Munition, a new version of the small diameter bomb. The FLM is a compact weapon system that can destroy a target while causing little, if any, collateral damage.  
(photo by Drew Hamilton)*



- **846TH TEST SQUADRON/TGTD, HOLLOMAN HIGH SPEED TEST TRACK (HSTT):** The Holloman High Speed Test Track is a rocket test and aerospace test facility which provides an efficient and safe means of testing customer test items while

minimizing risks and reducing cost for a wide variety of test hardware in a near operational environment. Specific advantages are: the test items are recovered for post-run analysis; the sled provides sustained linear and dynamic acceleration and velocity with superimposed, tailored vibration; and the sled track provides extremely accurate test article positioning and time correlation. Repeated tests of the same test item provide an independent evaluation of modifications made during a development program.

The Holloman High Speed Test Track is the longest (50,788 feet) and most precisely aligned and instrumented facility of its kind in the world. The track is used to simulate selected trajectories of aircraft and missiles under stringent conditions. Sled speeds up to 7,000 ft/sec are routine, while speeds above 8,900 ft/sec have been demonstrated. Depending on mission needs, sled weights range from 100 to 30,000 pounds; however, heavier sleds can be operated as required. Also, depending on payload size, accelerations above 200 g's have been demonstrated. The Holloman High Speed Test Track is organized as a squadron under the 46<sup>th</sup> Test Group, a tenant organization on Holloman Air Force Base, New Mexico. It is physically located near the eastern boundary of WSMR, virtually unaffected by environmental and encroachment problems. While operated primarily for the needs of the Air Force Materiel Command, its test capabilities are also available for other Government agencies and their respective contractors.

- **NATIONAL RADAR CROSS SECTION TEST FACILITY:** The National Radar Cross Section (RCS) Test Facility (NRTF) is the premier DoD facility for RCS testing. Formerly known as RATSCAT, which began measuring radar scattering in 1963, it is comprised of two complementary sites, Mainsite and RATSCAT Advanced Measurement System (RAMS). Assigned to the U.S. Air Force's 781st Test Squadron, NRTF is located west of Holloman Air Force Base, New Mexico in a rolling gypsum region of WSMR. NRTF specializes in the RCS characterization of full-scale, aerodynamic vehicles and antenna radiation pattern development. Due to its remote, secure environment, it can also accommodate customers requiring specialized testing of developmental electronics systems. NRTF products directly support weapon system development programs, vulnerability assessment studies, and mission planning efforts throughout the DoD.



- **RADAR TARGET SCATTER (RATSCAT) ADVANCED MEASUREMENTS (RAMS):** RAMS is a self-contained, secure test complex consisting of the Target Support facility, an 8900 foot paved shadow plane range, the Central Facility, and an office complex, situated at the base of the San Andres mountains 35 miles northwest of the NRTF Mainsite.

- **586TH FLIGHT TEST SQUADRON:** The 586th Flight Test Squadron (586 FLTS) performs flight tests of the most advanced aircraft systems in the world. The squadron has aircraft parking and administration facilities to provide a high level of security to its customers. It owns and operates three highly modified AT-38B aircraft equipped to support a wide variety of flight test operations. Capabilities of the squadron's AT-38Bs include: chaff, flares, GPS navigation and precision data recording and telemetry, ECM, Air Combat Maneuvering Instrumentation (ACMI) pods, and multiple format photographic coverage (including helmet-mounted video cameras). The squadron owns and operates a highly modified C-12J (Beech 1900 Airliner) with multiple antenna and pod configurations for guidance/navigation, avionics, and electronics testing. The 586 FLTS has access to both full-scale and sub-scale unmanned aerial targets as well as one of the world's most elaborate ground impact ranges. The 586th Flight Test Squadron is the world's leading authority on overland firings of the Air Force's primary medium range air-to-air missile (AMRAAM).
- **NORTH OSCURA PEAK:** The Air Force Research Laboratory (AFRL) is headquartered at Wright-Patterson Air Force Base, Ohio. The AFRL Directed Energy Directorate is headquartered at Kirtland Air Force Base, Albuquerque, New Mexico and manages the North Oscura Peak facility located at WSMR. The facility is located at an elevation of approximately 8000 feet and includes a one-meter telescope, capable of negative elevations settings and 360 degree rotation laser transmission. The facility has been used to support the Airborne Laser (ABL) program.

**PROGRAM EXECUTIVE OFFICE - INTEGRATION (PEO-I) ARMY BRIGADE COMBAT TEAM (BCT) MODERNIZATION:** The PEO-I supports testing and evaluating of BCT unmanned aerial and ground systems, sensors, and spin-out technologies at WSMR. The Army BCT tests in a full scale, full spectrum operability and terrain environment at WSMR, which is home to the System Integration Lab, Test Complex, and test support and administrative areas for the Program Manager Lead Systems Integrator.

*Soldiers control the Class I unmanned aerial vehicle (UAV) at White Sands Missile Range. The system is designed to provide the soldier with reconnaissance, surveillance and target acquisition. (U.S. Army PEO-I (BCT) photo.)*



PEO-I is supporting the current fight in the Global War on Terror, transforming that fight from historical scenarios to irregular warfare. Historical fighting included massed formations (fight after buildup); sequential, contiguous operations; linear warfare that attacks enemy formation and controls terrain and/or populations; intelligence by contact and direct observation; and massive logistics buildup of supporting soldiers and vehicles. Irregular warfare requires distributed precision (rapid, agile maneuver forces ready to engage on arrival); simultaneous networked operations; non-linear warfare that directly

attacks enemy centers of control; close in view of battle via global C4ISR network sharing situational awareness among soldiers in fighting teams; and a small logistics footprint with automated logistical reach functionality. PEO provides solutions to this transformation in warfare with the development and testing of core and spin out technology including:

Class I Unmanned Aerial System (UAS), Class IV UAS Fire Scout, Small Unmanned Ground Vehicle (SUGV), Multifunction Utility/Logistics and Equipment Vehicle (MULE), Command and Control Vehicle (C2V), Reconnaissance and Surveillance Vehicle (RSV), Infantry Combat Vehicle (ICV), Mounted Combat System (MCS), Non-Line-Of-Sight Cannon (NLOS-C); Non-Line-Of-Sight Mortar (NLOS-M), Medical Vehicle – Evacuation (MV-E) and Treatment (MV-T); Recovery and Maintenance Vehicle (FRMV)

### **CALCULATED LETHAL RESPONSES:**

BCT Modernization provides calculated lethal responses by:

- Combining network, sensors, unmanned air and ground systems, allowing elements at all echelons to detect the enemy while our forces are beyond detection range.
- Providing layered, manned and unmanned sensors, fires and effects.
- Developing situational awareness out of contact enables leaders to decide when, where, and how MGV and combat effectors engage resulting in increased lethality.
- Applying NLOS, BLOS, and LOS capabilities fully integrated with maneuver.

### **JOINT FORCE:**

BCT Modernization provides the Joint Force:

- The Network – a Common Operating Picture (COP) to enable the Force to act with seamless coordination
- Increased survivability and lethality- greater situational awareness, calculated response I lieu of reactionary conflict
- Revolutionary commonality and reliability increasing combat power while achieving significant logistics footprint reductions
- In-transit training on specific mission scenarios

For additional information on the Army BCT Modernization Program, please see: <https://www.fcs.army.mil>.

### **NATIONAL AERONAUTICS AND SPACE ADMINISTRATION (NASA):**

NASA's White Sands Test Facility (WSTF) operates the White Sands Space Harbor (WSSH), the primary training area for space shuttle pilots flying practice approaches and landings. WSSH includes an airfield and operations complex built on the White Sands Missile Range dry gypsum lakebed. STS-3, Space Shuttle Columbia landed at WSSH in 1982 and remains an emergency landing site.

The Space Harbor runway accommodates NASA and military aircraft. Large aircraft including the C-17, C-5As, B-52s, and Boeing 747s have landed there. WSSH has three hard-packed gypsum runways. Two are 35,000 (11,000m) long by 300 ft (91 m) wide

including wide shoulders and mimic runways at Kennedy Space Center, Florida and Edwards Air Force Base, California. A third runway is 12,800 ft (3,900 m) long by 150 ft (46m) wide and mimics the runway at Ben Guerir, Morocco and can be used for training simulations of Moron, Spain and Istrus, France. The two long runways are laser leveled to a tolerance of  $\pm$  inch (2.5 cm) per 1,000 feet (304.8 m). WSSH is instrumented with a vast array of navigation and landing aids. Pilots employ the Tactical Air Navigation (TACAN) system for instrument landing approaches. The globally recognized TACAN system is operated by the DoD and used by civilian and military aircraft.

**TRAINING AND DOCTRINE COMMAND (TRADOC) REQUIREMENTS ANALYSIS CENTER (TRAC):** TRAC at White Sands Missile Range, New Mexico (TRAC-WSMR) conducts a wide variety of analyses for TRADOC and HQDA, and DoD agencies, including military system Program Managers and the Army Test and Evaluation Command (ATEC). TRAC-WSMR is responsible for highly resolved analysis of brigade and battalion operations, life cycle costs of new equipment, and training effectiveness. TRAC-WSMR develops, maintains, verifies and validates, and exports a suite of combat models and simulations to support analyses of battlefield functional areas and weapon systems, and stimulation of field exercises, experiments, and training; and operational testing of new equipment under development.

**TRAC MISSIONS:**

- Conducting studies that inform key decisions made by TRADOC, Army, and Joint leaders.
- Leading the analysis for major Army experiments.
- Developing and maintaining scenarios to underpin Army concepts and requirements.
- Developing, configuration managing and applying verified and validated M&S.
- Researching, developing, and sharing new analytics methods and modeling.

**TRAC KEY CAPABILITIES:**

- Serving as the Army lead for FCS and Strategic Choices analysis.
- Providing direct analytic support to Future Force Integration Directorate.
- Sole agency charged with the conduct of Brigade and below operational analyses.
- Army developer and maintainer for Army's single approved analytic combined arms combat simulation.
- Extending test outcomes through Model-Test-Model paradigm that enables assessments across a wider set of METT-TC.

**HIGH ENERGY LASER SYSTEMS TEST FACILITY (HELSTF):** The High Energy Laser Systems Test Facility (HELSTF), operated by the U.S. Army Space and Missile Defense Command/Army Forces Strategic Command (USASMDC/ARSTRAT), is a Department of Defense Major Range Test Facility Base (MRTFB) activity. HELSTF's experienced workforce, test areas, access to extended land and air range space at White Sands Missile Range (WSMR), and infrastructure provide a one-of-a-kind capability for a wide variety of laser propagation, lethality, survivability, vulnerability,

and dynamic engagement testing & evaluation. The Test Facility represents an approximately \$800 million investment in High Energy Laser research and includes the following capabilities:

- **SEA LITE BEAM DIRECTOR (SLBD):** A high-precision pointer-tracker system built by Hughes Aircraft Company for the U.S. Navy, the Sea Lite Beam Director provides the capability to track highly maneuverable tactical targets. The infrared optics on the beam director also serves as a high-resolution infrared imaging system that can record data from missile tests conducted at WSMR.


- **PULSED LASER VULNERABILITY TEST SYSTEM (PLVTS):** Operational since June 1992, the PLVTS is a surrogate laser device capable of duplicating many tactical laser threat systems.



- **THE HAZARDOUS TEST AREA (HTA)** is located 900 meters downrange from the laser test cells. The Hazardous Test Area is used for large targets or targets that explode or release large quantities of gas/liquid. Extensive instrumentation is also available at this site.

- **THE OPTICAL MAINTENANCE FACILITY (OMF)** provides an on-site capability to characterize, clean, and install optics of virtually any type; from windows to the new uncooled optics.

- **THE LARGE VACUUM CHAMBER (LVC)** is a 50 foot diameter sphere that can produce a vacuum equivalent to a 600,000 foot altitude. It is the only large vacuum chamber in the country capable of allowing the entry of full-power, high-energy laser beams.

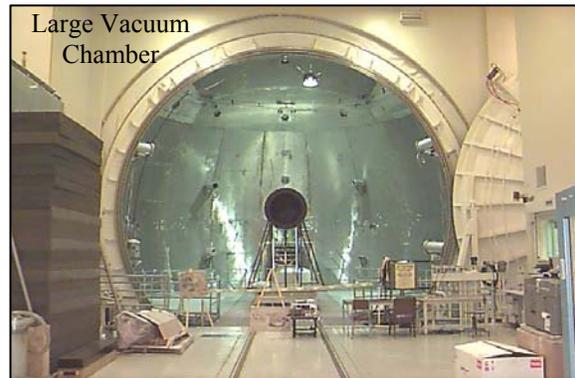

- **TARGET REFLECTED ENERGY MEASUREMENT (TREM) SYSTEM:** The TREM Capability measures in-band laser radiation reflected off a stationary ground target (static or spinning to emulate a dynamic target) used for testing a high energy laser weapon. This capability was developed in response to a high-priority shortfall identified by the 2004 Tri-Service Study (T-SS), which developed, scoped, and prioritized directed energy (DE) test and evaluation (T&E) infrastructure shortfalls. The shortfall represented a need for a capability to

measure inband laser radiation reflected off a ground target. This capability was developed by the Directed Energy Test and Evaluation Capability (DETEC) project and is owned and operated by HELSTF.

- **GROUND TARGET IRRADIANCE MEASUREMENT (GTIM) SYSTEM:** The GTIM capability measures, at the target, the irradiance distribution of an incident continuous wave (CW) laser beam in the near-infrared (NIR) portion of the spectrum (1.0  $\mu\text{m}$  – 1.6  $\mu\text{m}$ ). This capability was developed to resolve a high-priority shortfall identified by the 2004 DETEC Tri-Service Study (T-SS), which developed, scoped, and prioritized directed energy (DE) test and evaluation (T&E) infrastructure shortfalls. This shortfall represented the need for a capability to provide time dependent spatial distributions of CW laser irradiance in the NIR portion of the spectrum at the target surface. The GTIM capability was developed by the Directed Energy Test and Evaluation Capability (DETEC) program and is owned and operated by HELSTF.
- **20 KW SOLID STATE FIBER LASER:** HELSTF owns and operates a 20kW fiber laser welder device as part of a high energy laser capability for solid state laser testing. The device is housed in container, with its ancillary equipment, that can be transported to any location to support high energy laser testing.
- **THEL STATIC TEST SITE (TSTS):** A fully instrumented site with remotely controlled diagnostic equipment, the TSTS is located approximately 700 meters downrange from THEL and allows for safe testing of multiple full-scale tactical and explosive targets.

**THE DEFENSE THREAT REDUCTION AGENCY (DTRA)** is a combat support agency of the DoD, assigned the mission of safeguarding the United States and its allies from weapons of mass destruction (WMD-chemical, biological, radiological, nuclear and high-yield explosive weapons) by providing capabilities to reduce, eliminate, and counter the threat and mitigate its effects. DTRA's mission includes serving as the DoD focal point for the research, development, testing, evaluation and production of technology to support options against underground or hardened structures and other facilities. The agency provides end-to-end test event planning, management, safe execution, results analysis and threat-based operationally realistic targets supporting DoD, the Department of Homeland Security, the Department of State and various federal agencies and friendly nations' programs to counter proliferation of WMD.

DTRA Research and Development Enterprise's primary testing location is WSMR where it maintains a broad spectrum of target types on its test beds and directs the development and implementation of new weapons technologies against these targets. DTRA conducts a wide variety of research and development field tests to meet agency mission requirements. The agency headquarters is located at Fort Belvoir, VA. The DTRA Counter Weapons of Mass Destruction Technologies Directorate Test Support Division of the Research and Development Enterprise is located at Kirtland Air Force Base, Albuquerque, NM. To learn more about DTRS, visit. <http://www.dtra.mil>.

**ARMY RESEARCH LABORATORY (ARL):** ARL is the Army's primary source of fundamental and applied research. With more than 1,250 scientists and engineers, ARL is a key in-house repository of expertise in support of Army-unique requirements. The laboratory's mission is to provide key technologies and analytical support to ensure the Army decisive victory in future land warfare.

Elements of two ARL organizations are located at WSMR: the Information and Electronic Protection Division (IEPD) of the Survivability/Lethality Analysis Directorate (SLAD) and the Computational and Information Sciences Directorate (CISD) Battlefield Environment (BE) Division.



*Visitors are shown one of the doors to the main test chamber in the Electromagnetic Vulnerability Assessment Facility. The main chamber which is over 100 feet long can be used for experiments with everything from computer networks to tanks and small aircraft. (Photo by Drew Hamilton)*

● **INFORMATION AND ELECTRONIC PROTECTION DIVISION (IEPD):**

The IEPD's mission is to determine the survivability, lethality, and vulnerability (SLV) of all U.S. Army missile defense systems, aviation systems, ground systems and technology demonstrations to the full spectrum of battlefield threats and atmospheric interactions throughout the systems' life cycle. IEPD is the Army's lead organization for determining electronic warfare (EW) vulnerability and information operations (IO) vulnerability/survivability of U. S. Army systems and provides technical support to other DoD activities. IEPD provides SLV and evaluation support to developers, decision makers and the Army evaluator and provides technical judgments on complex SLV issues. IEPD researches, investigates and recommends counter-countermeasures for U. S Army systems to reduce their susceptibilities/vulnerabilities and to ensure optimum survivability and lethality in threat environments.

Since 1952, IEPD and its predecessor organizations have carried out a mission at WSMR. Recent technological advances in information operations, electro-optics and directed energy provide new arenas for study, complementing work in the more traditional radio frequency and microwave areas.

IEPD has employees at WSMR, Fort Monmouth, NJ, and Aberdeen Proving Ground, MD.

● **COMPUTATIONAL AND INFORMATION SCIENCES DIRECTORATE (CISD):**

The CISD BE Division's mission is to advance the understanding of the atmosphere and its relationship to and impact on the performance of Army systems, personnel and operations.

The Atmospheric Modeling and Atmospheric Dynamics Branches of BE have been at WSMR since the mid-1940's. One of its first activities here dates back to

1946, when it provided radar and communications support for the V-2 rocket program. The current mission of the BE Branches at WSMR is to perform the research and development needed to meet the Army Future Force requirements to exploit weather and its effects by advancing the understanding of the atmosphere and its critical relationships to performance of Army systems and operations and to develop, acquire and integrate new technologies that ensure land force dominance.

*Robert Brice, a Meteorology Technician with Army Research Labs, center, explains how ARL can use mobile weather stations to collect weather data for Army testing missions during a visit by high school students. The students were visiting ARL facilities on White Sands Missile Range as part of the Gains in the Education of Mathematics and Science program.*



The ARL CISD/BE Division develops advanced technology and tactical decision aids for insertion into Army Battle Command Systems. It develops the sensing and modeling technologies to address boundary layer meteorology at very high spatial and time resolutions over complex and urban terrain in three dimensions and in near real time. BE develops and verifies acoustics and electro-optical sensing models to support advances in sensing technologies and to answer questions such as “How far can I hear and be heard? How far can I see and be seen?” BE research addresses complex problems such as how to determine and convey the level of confidence in meteorological forecasts and how to assimilate and fuse meteorological observations from non-conventional MET sensors to update the local short term forecast during mission execution.

Products are transitioned to the Project Director, Integrated Meteorological System, Project manager, Distributed Common Ground Station – Army, PM-TIMS and other DoD customers. The BE Division has personnel at WSMR, the Adelphi Laboratory Center, MD, and the Combat Weather Center, Hurlburt Field, FL.

Learn more about the Army Research Laboratory at [www.arl.army.mil](http://www.arl.army.mil).

**CENTER FOR COUNTERMEASURES (CCM)\*:** The Center for Countermeasures is a joint Service agency operating under the Office of the Secretary of Defense, Director, Operational Test and Evaluation. Its mission is to direct, coordinate, support, and conduct independent countermeasure/counter-countermeasure test and evaluation activities for U.S. and foreign weapon systems, subsystems, sensors, and related components.

Civilian scientists and technical personnel provide Service-independent countermeasure susceptibility and/or vulnerability analysis, testing, evaluation, and assessment throughout a weapons system’s life cycle. The Center also conducts, coordinates, or participates in foreign equipment exploitation within defined program countermeasure

objectives. Activities complement or supplement—but do not duplicate—various Service and Intelligence program efforts.



*The Center for Countermeasures tests a flamethrower during nighttime testing; the flamethrower acts as a countermeasure to protect the tank from attack.*

The Center makes recommendations for improvements to system developers and decision makers, as well as to the Office of the Secretary of Defense. These activities and recommendations contribute greatly to the production of countermeasure-hardened U.S. weapons systems and the improved capabilities necessary for these systems to function effectively in the increasingly hostile environments found on the modern battlefield. The Center's fully mobile test teams are capable of operating under a wide variety of environmental countermeasure/counter-countermeasure test operations on a worldwide basis. Center personnel develop, maintain, and operate an inventory of unique countermeasure equipment and techniques not under development, or unavailable within other Department of Defense components' programs, as well as use military hardware in their inventory and pyrotechnics.

*A 4-round half salvo of GALIX 13 grenades is launched from the Center for Countermeasures' M-60 tank during testing.*



For more information, visit [www.ccm.osd.mil](http://www.ccm.osd.mil) or [www.ccm.osd.smil.mil](http://www.ccm.osd.smil.mil); call (575) 678-7221; or write to Director, Center for Countermeasures, MLK Jr. Blvd., Bldg. 1407, White Sands Missile Range, NM, 88002-5519.

**NATIONAL GEOSPATIAL AGENCY (NGA):** The National Geospatial Intelligence Agency (NGA) at WSMR acquires, analyzes, reduces, and furnishes precise geodetic and geophysical survey data to WSMR support personnel and outside customers. NGA provides astrogeodetic deflections, geoid heights, gravity values, precise distances, true azimuths, astronomical positions/ azimuths and geodetic control to accuracies of one part per million. Increased accuracies can be achieved using state-of-the-art equipment and techniques to precisely locate the impact points of missile components and other test debris for flight safety, recovery, and post-test analysis. NGA provides positions based on the World Geodetic System 1984. Other datums and projections, such as White Sands Datum 1973, White Sands Cartesian System, and the Universal Transverse Mercator, are available on request.

# CHAPTER FIVE

## Visiting The Range



**DIRECTIONS TO WHITE SANDS MISSILE RANGE:** The range is located in the Tularosa Basin of south-central New Mexico. The headquarters area is 20 miles east of Las Cruces, New Mexico, and 45 miles north of El Paso, Texas. The range boundaries extend almost 100 miles north to south by 40 miles east to west. At almost 3,200 square miles the range is the largest military installation in the country.

● **TO WSMR MAIN POST FROM EL PASO, TEXAS AIRPORT:**


- When you leave the El Paso Airport area, turn right onto Airway Blvd
- At the second stoplight, turn right onto Airport Rd. Airport Rd becomes Fred Wilson Blvd
- Immediately after the Fred Wilson overpass, turn right and enter Highway ramp on the left). Continue on Highway 54 and exit on Martin Luther King Exit 31.
- Turn left onto MLK Jr. Blvd. and stay on it (follow the signs that guide you
- It is approximately 34 miles from this point to the El Paso Gate entrance WSMR main post area.
- After the Cattle Guard, the speed limit drops from 65 mph to 55 mph.
- At the second Yellow Flashing light, the road makes a 90 degree right turn speed limit at the turn is 15 mph. Stay on the highway, and the mountain will be on your left hand side.

● **FROM LAS CRUCES, NEW MEXICO:**

- Take Highway 25 north to Highway 70 East (Highway 70 is also called "Main Street").
- Turn right onto Highway 70 East towards WSMR or Alamogordo
- Continue on Highway 70 East for about 25 miles over the San Augustine exit just after mile marker 169.
- Turn right onto Owen Rd
- The Las Cruces/Alamogordo Main Post Gate is approximately 3 miles after

● **FROM ALAMOGORDO, NEW MEXICO:**

- Take Highway 70 west.
- Proceed about 47 miles to the missile range exit labeled "Headquarters" mile marker 172. The exit ramp loops under Highway 70 onto Owen Rd.
- The Las Cruces/Alamogordo main post gate is approximately 3 miles.

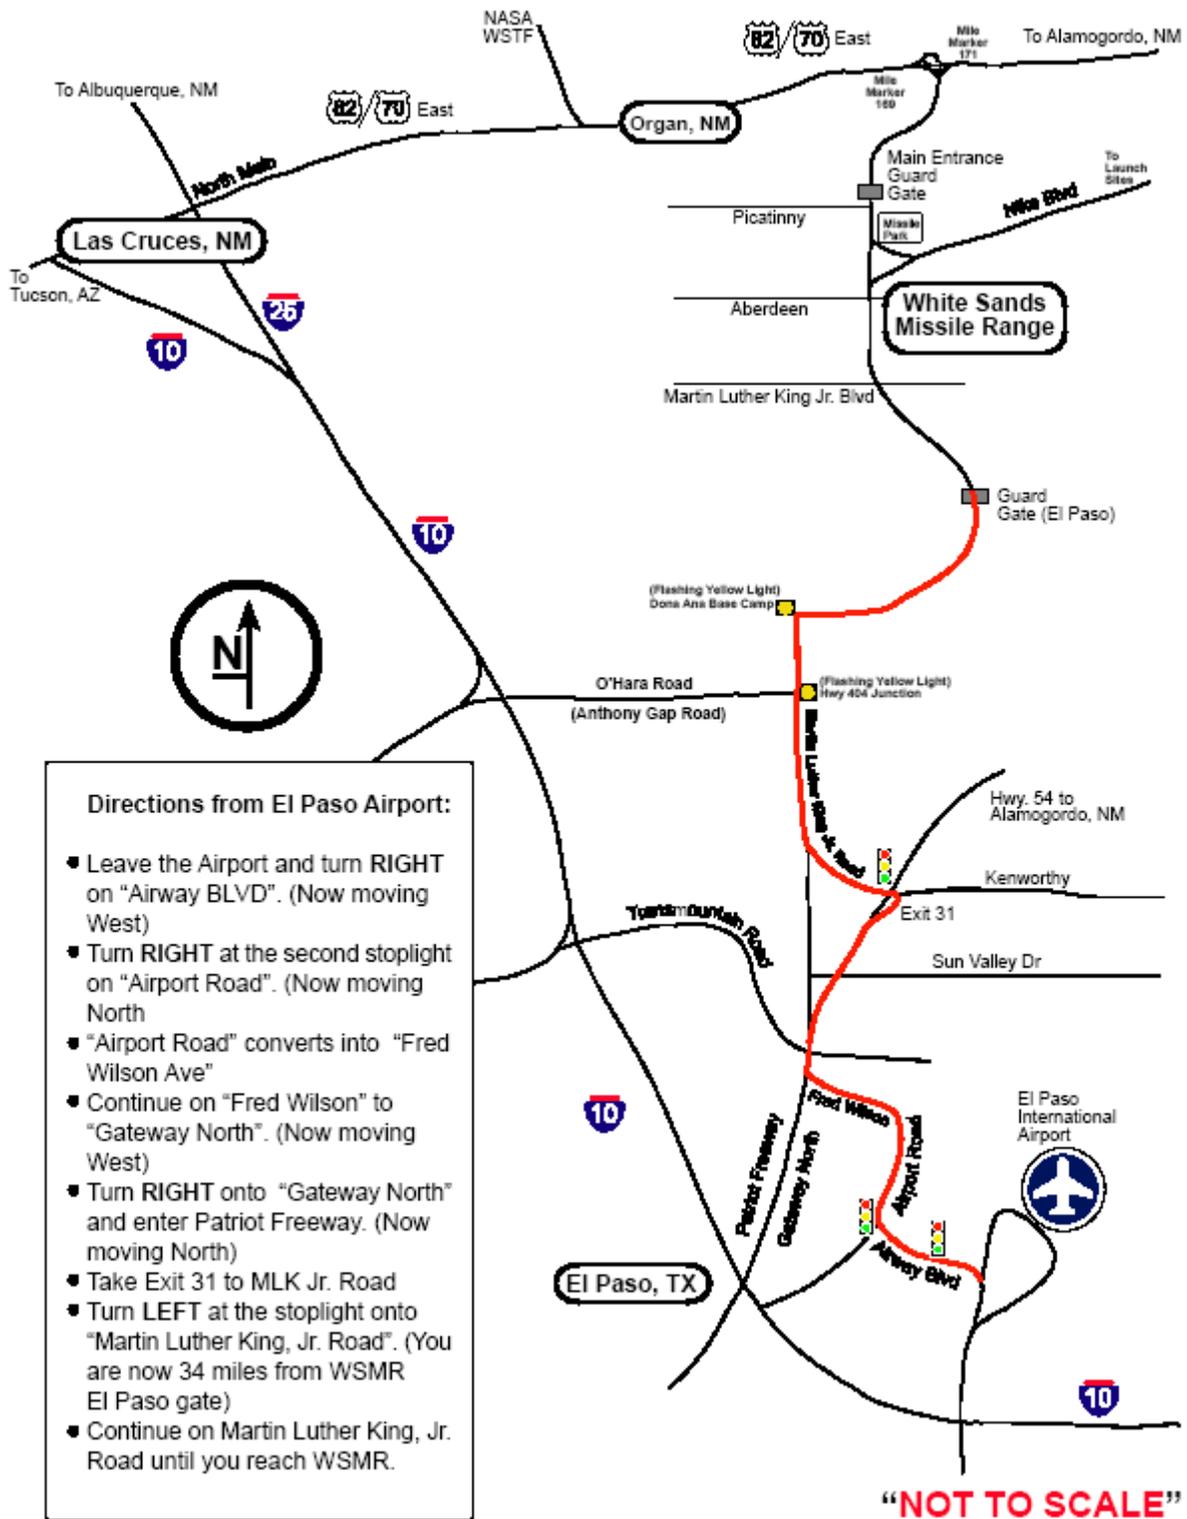

**VISIT REQUESTS:** For U. S. citizens that will be visiting WSMR, all security clearances should be faxed to the WSMR Security Office at 575-678-3157. The Test Officer or other WSMR Point of Contact (POC) will contact this office and the Protocol Office (if applicable) to make them aware of your visit. For Non-U.S. citizens representing a foreign government, industry, or academic institution, the following policy applies:

- All visits by foreign nationals will require advance notification NLT 15 days and approval by the WSMR Foreign Disclosure Officer (FDO). Although visit requests usually come into WSMR through the DA SPAN network, monitored and processed internally within WSMR by the FDO, other visitors such as Liaison Officers (LNO) or visitors on Invitational Travel Orders (ITO) may come directly to the WSMR POC (normally the WSMR Test Officer (TO)) for the project involved. In such cases, the POC will instruct the potential visitor to submit his request through his local FDO. These occurrences should be identified to the WSMR FDO as soon as possible to ensure proper coordination is made with the other agency involved.
- WSMR POC's sponsoring meetings including foreign national participation will ensure that appropriate visitor clearance is required, whether the meeting is held on WSMR proper or at an off-site location.
- All official foreign contacts with the Army must be requested by diplomatically accredited military attaches on behalf of their government. Foreign military attaches are provided with a handbook summarizing policies and procedures contained in AR 380-10.
- Except as authorized by the HQDA or senior Army leadership (Secretary of the Army, Under Secretary of the Army, Chief of Staff, or Vice Chief of Staff), foreign representatives are not authorized official contact or communications with either DA personnel or DA organizations in any manner pertaining to any aspect of official business without prior authorization. Foreign representatives initiating such contact are to be informed that appropriate prior authorization for contact must be obtained on their behalf from DA by their respective military attaches.
- The Foreign Disclosure Officer (575-679-6353) should be notified as soon as possible as to the dates of the confirmed visits.

**VISITING THE RANGE:**

- Visitors on WSMR are limited to the cantonment area within the Las Cruces and El Paso gates, the housing area and one-half mile on Nike Road (east of Headquarters Boulevard) except:
  - When on official business with authorization by the activity being visited, to travel directly to and from that activity.
  - Foreign nationals when on official business accompanied by a military or civilian employee, or by contractor personnel who have unrestricted

travel authority to and from activities located outside the main post area.

- Commercial vehicle drivers will produce a Bill of Lading that indicates the location, agency, or building to be visited. Once verification is completed, a pass will be issued.

- **VEHICLE REGISTRATION:** Security personnel manning the gates at public entrances to WSMR require visitors to stop and obtain a vehicle pass. In order to get a pass, the driver will have to show the following items required by the State of New Mexico by all motor vehicle operators:

- Valid driver's license
- Current vehicle registration
- Current proof of insurance

In addition, DoD civilians and contractors living on or employed on WSMR will register all vehicles they plan to operate on WSMR within three working days after employment commences. Contractors temporarily assigned to WSMR will receive a temporary vehicle registration for contract of six months or less. For assignments 6months or longer, contractors may receive a vehicle registration decal to expire no later than 12-months upon issue. Registration Requirements:



African oryx, or gemsbok, (Oryx aazella)

- **BADGE REQUIRMENTS:** For other entrances, visitors must show a missile range security badge or be escorted by an official White Sands escort. News media representatives are required to be escorted while on range except at events open to the public.
- **ROADBLOCK INFORMATION:** Roadblocks are designed to protect motorists from the unlikely event of missile and target debris falling on the highway during a test mission. As a rule roadblocks last about an hour. They can last longer if there is a problem or if personnel have to clean up debris from the road. The Range sets the following color coded roadblocks on public roads around the installation:

- Highway 70 blocks are set at various points between *White Sands National Monument (WSNM)* and *San Augustin Pass*:
  - Red Roadblock is at San Augustin Pass;
  - Blue is just east of the Main Post access road;
  - Black is at the Dona Ana/Otero county line;
  - Brown is about 14 miles west of WSNM;



White Sands National Monument

- ✦ Yellow is about seven miles west of WSNM;
- *Highway 380* blocks are set east of the *Rio Grande River* and west of Carrizozo, New Mexico:
  - ✦ Gold Roadblock is about seven miles east of San Antonio, New Mexico
  - ✦ Silver Roadblock is 16 miles west of Carrizozo, New Mexico.
- *Highway 54* blocks are set south of Oro Grande, New Mexico and north of the New Mexico-Texas state line.

Current roadblock information is available by calling 678-1178 from the Las Cruces area, 479-9199 from the Alamogordo area, 835-8899 from the Socorro area and on the WSMR webpage, [www.wsmr.army.mil](http://www.wsmr.army.mil). The information is usually updated each weekday in the late afternoon for the following day. Since Range mission schedules can slide due to circumstances like weather or equipment problems, local highway and Range travelers should check the recording right before leaving to ensure nothing has changed.

● **PHOTOGRAPHY RESTRICTIONS:** Generally, photography is prohibited; however, personal photography is authorized without prior permission in the following areas:

- North of Martin Luther King Avenue to Highway 70 to include all of Owen Road,
- West of Headquarters Avenue to the western range boundary,
- Area south of Nike Avenue to Martin Luther King Avenue east,
- Headquarters Avenue (otherwise known as Range Road 1 or El Paso Road) only to 500K access.
- These areas include the skeet range, JFK Parade Field, Missile Park, hospital, barracks, and picnic and recreation areas.

All other areas require photo permits. Requests must be signed by an official of a Range or tenant element, and then forwarded to the Security Directorate for approval. Photography of mission related areas is limited to authorized official WSMR photographers. The absence of an official photographer's permit will result in confiscation of the film.

**UNEXPLODED ORDNANCE (UXO):** The safety of the White Sands workforce, our visitors, and our families is our number one priority.


Unexploded ordnance is a complex problem and not unique to White Sands Missile Range. White Sands has initiated a very aggressive safety and remediation program and has published one of the most comprehensive plans in all of DOD for dealing with UXO, the *UXO Hazards and Munitions Management Plan*, which can be found at ([www.wsmr.army.mil/bd/visitors/doc/uxo\\_plan.htm](http://www.wsmr.army.mil/bd/visitors/doc/uxo_plan.htm)).

- Visitors to White Sands Missile Range will be required to have UXO safety awareness training. Visitors wishing to travel outside the White Sands Extended Cantonment Area on a non-escort basis shall:

- Read and sign the *UXO Range Hazards Orientation Letter* and provide a copy to their sponsor,
- View the seven minute long UXO Hazards Video or attend an EOD briefing ([www.wsmr.army.mil/bd/visitors/vid/uxo\\_56k-mod.wmv](http://www.wsmr.army.mil/bd/visitors/vid/uxo_56k-mod.wmv)),
- If requested by their sponsor, complete and submit the *Record of Organizational Training on Unexploded Ordnance Range Hazards*.

The Range Sponsor will issue visitors the *UXO Range Hazards Card* upon completion of the training and arrival at White Sands Missile Range. It is very important that you do not proceed beyond the extended cantonment area without a *UXO Range Hazards Card* or an escort. For questions, Please contact the White Sands Test Center (WSTC) at your Range Sponsor.

### EXTENDED CANTONMENT AREA

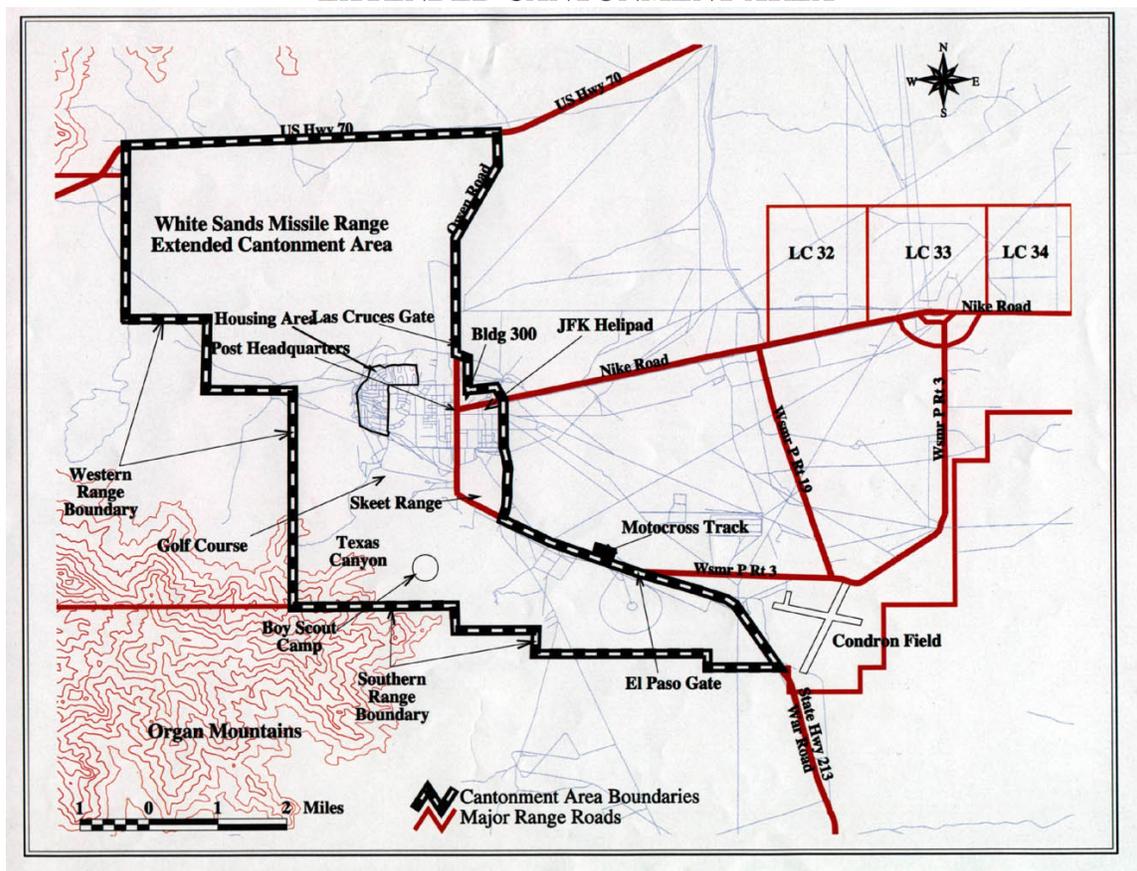

**INSTALLATION HOURS OF OPERATION:** WSMR personnel are here to serve your testing needs. Based on your testing priorities, we will strive to meet your requirements on weekends and holidays as needed. Core working hours are from 0800 to 1630 Monday thru Friday. Mission objectives may require shift work in which working hours are adjusted outside of the normal core hours to support your needs. WSMR has an annual Range Shutdown period for specific maintenance that encompasses the Saturday before Christmas through the Saturday after New Years.

**SMOKING POLICY:** Smoking is prohibited inside all government facilities and vehicles at White Sands Missile Range. Smoking is permitted only in established designated areas and only in accordance with laws and current regulations. Smoking is allowed at a distance of at least 50 feet from government buildings.

-

# CHAPTER SIX

## At Home On The Range



**MORALE, WELFARE AND RECREATION (MWR):** The Garrison Command's Morale, Welfare, and Recreation organization would like to welcome you to our community. MWR offers a wide variety of recreational activities, hobby opportunities, innovative events and social gatherings for the White Sands community. If you enjoy golf, bowling, or skeet shooting, MWR can help you. MWR also offers top quality child care and youth programs, discount tickets to area attractions, arts & craft classes and much, much more!! MWR is also committed to providing support and leisure services that are as outstanding as the people that we serve. We believe that Soldiers and their Families deserve the same quality of life as they are pledged to defend. MWR encourages the healthy balance of work and leisure that Soldiers need, by delivering state of the art facilities, community event tickets, holiday functions, competitive and recreational sports, family support services. MWR is for the entire military population, including Active Duty, Reserve, National Guard, Retirees, DoD Employers, Contractors, their Spouses and Families. Additional information for all services can be found in the appendix. Some of our major services are listed below:

***ARTS AND CRAFTS CENTER, 678-5321***



A well-equipped Arts and Crafts Center is in Building 426 on Dyer Street. The facility has woodworking, ceramics, stained glass, silversmithing, pottery and a frame shop. Classes are periodically offered in these and other crafts. The facility includes a sales area that carries a wide array of supplies. A trained staff is on duty to help with projects and teach new techniques. Safety classes are offered every Thursday from 5:00pm to 7:00pm. With our new

computerized mat cutter, your projects can be completed in two days. The Arts and Crafts facility provides engraving services for awards and plaques, stop by and see what we can do for you. We have a wide assortment of Handmade items from Pens to Cutting Boards to Coin Racks, perfect for that last minute gift. Custom orders are welcome.

*Operational Hours:*

Wednesday-Friday - 11 am - 8 pm  
 Saturday-Sunday - 9:30 am - 5 pm  
 Monday-Tuesday, Holidays - Closed



***AQUATIC CENTER, 678-1068***



The Aquatics Center is in Building 462, adjacent to the Community Center offers a 25-meter, eight-lane indoor, year-round pool plus a 24-foot diameter children's pool. The main pool depth is 3 1/2 feet at the shallow end and 12 feet at the deep end. The water temperature is kept between 82-84 degrees F - perfect for training or recreational swimming.

There are 1-and 3-meter diving boards, a 51-inch big screen TV, water slide, water basketball, inner tubes and water polo equipment. The center features two sun decks with lounge chairs and umbrella tables – and water tag....perfect for birthday or private parties.

*Operational Hours:*

Monday-Sunday - 10:30 am - 7pm  
 FOR PHYSICAL TRAINING (PT)  
 Monday-Friday - 5:30 - 10:00  
 Thanksgiving, Christmas & New Years - Closed



**AUTO SKILLS CENTER, 678-5800**



The Auto Skills Center provides a two fold program for its patrons. It is a well equipped facility for patrons to perform self-help minor maintenance and repair on their vehicles. and to provide tools and equipment plus technical assistance as needed. The second priority is to provide service-for-fees to those individuals that do not want to or cannot perform automotive maintenance and repair. The

Auto Skills Center provides many different services for the White Sands workforce and invites the community to stop by the facility and see what's available. The car wash/vacuum area is a 24/7 operation so that WSMR residents and employees can maintain their vehicles at their convenience.

*Operational Hours:*

- Tuesday-Thursday - 8 am - 5 pm
- Friday - 12 noon - 9 pm
- Saturday-Sunday - 8 am - 5 pm
- Monday, Holidays & Last Wednesday of Month - Closed



**COMMUNITY CENTER, 678-4134**



The Community Center, Building 460, operates a DVD rental with more than 2000 titles. Each Tuesday new releases come out. United Parcel Service is available to ship packages. The Center contains a billiards room and game room. The Community Center offers Chair Massages on Tuesdays, Wednesdays and Thursdays from 10:30 a.m. - 2

p.m. Call 678-4134 for an appointment. Customers may purchase discounted tickets from ITR for restaurants, movie theaters, cruises, hotels, Disneyland, Disneyworld, Six Flags, or anywhere you wish to travel.

*Operational Hours: Community Center:*

- Monday-Friday - 8 am - 9 pm
- Saturday - 10 am - 9 pm
- Sunday - 12 noon - 6 pm
- Holidays - 12 noon - 6 pm

*Operational Hours: ITR:*

- Monday – Friday - 9 a.m.–5 p.m.
- Sat – Sun           Closed
- Holidays            Closed



**GOLF COURSE, 678-1759**



One of the most popular spots on post is the White Sands Golf Course, adjacent to the Frontier Club, Building 1330. This 11-hole course is at the foot of the Organ Mountains, just south of the post housing area. Facilities include a driving range plus putting and chipping greens. Nationally advertised brands of clubs, bags and accessories are on sale in the pro shop. Motor carts and hand pulled carts are available for rent. A yearly family membership entitles the

entire family to enjoy golf without a limit on the number of rounds played.

*Operational Hours:*

- Tuesday-Friday - 8 am - 7 pm
- Saturday-Sunday - 7 am - 7 pm
- Monday - Closed
- Winter Closed at 5pm



**FRONTIER CLUB, 678-2055**



The Frontier Club, Building 1330 on Martin Luther King Drive, is the center for special events at White Sands Missile Range. The Club is open for breakfast 7 days a week, serving “Grab and Go” breakfast items, fresh coffee, and made-to-order omelets and burritos. Lunch is Monday – Friday, 11 a.m. – 1 p.m., serving daily entrée specialties, soup and salad bar, made-to-order deli and hot grilled sandwiches, desserts, and freshly baked cookies.

The daily entrée specials feature a wide variety of cuisines including many Southwestern favorites. Lunch offers patrons the opportunity to dine on the Verandah Patio where one can “graze and gaze” with a beautiful view of the Organ Mountains. Dinner is served nightly from 4:30 p.m. – 7:30 p.m. in the Corral Lounge with a menu that features appetizers, salads, sandwiches, and entrees to choose from. Grand “Gourmet Brunch Buffets” are served on Easter Sunday, Mother’s Day, Father’s Day, and Thanksgiving Day. Seats fill up quickly for these events so reservations are highly recommended. The Frontier Club also provides full service Banquet and Catering. The Club has two smaller banquet rooms that can seat up to 45 people and a large ballroom capable of events up to 300 people. The impressive Organ Mountains make for a beautiful background for weddings and receptions.

*Operational Hours:*

Breakfast Hours - Monday-Sunday - 6:30 - 9 am  
 Lunch Hours - Monday-Sunday - 11 am - 1 pm  
 Dinner Hours - Monday-Sunday - 4:30 - 7:30 pm  
 Bar Hours - Thursday - 4 - 10 pm & Friday 4 - 11 pm



**ROADRUNNER LANES BOWLING CENTER, 678-3465**



The Bowling Center, Building 234 on Dyer Street, has ten lanes, a snack bar and a lounge. The facility offers bowling at different rates Monday through Saturday. Birthday parties are offered for \$60.00 for the first 10 participants. The snack bar offers a variety of food for your enjoyment.

*Operational Hours:*

**Bowling Hours**  
 Mon-Thur - 10 am - 10 pm  
 Fri-Sat - 10 am - 12 midnight  
 Sun - 11 am - 6 pm

**Snack Bar Hours**  
 Mon-Thur - 6:30 am - 9 pm  
 Fri - 6:30 am - 11 pm  
 Sat - 10:30 am - 11 pm  
 Sun - 11 am - 6 pm

**Sparetime Lounge Hours**  
 Mon-Thur - 3 pm - 10 pm  
 Fri-Sat - 3 pm - 12 midnight  
 Sun - 12 noon - 6 pm  
 Thanksgiving, Christmas &  
 New Years - Closed



***LODGING OFFICE, 678-4559***



The Lodging Office provides our guests accommodations comparable to a moderate hotel/motel within the civilian community. The White Sands Lodging facilities are comprised of 70 permanent units; which includes 24 rooms in building 501, 19 suites in building 502, 15 rooms with double beds in building 506, and 12, two or three bedroom houses. During closure of the main office, Lodging

has a lock box system in the entryway. Each box has a combination key pad and Lodging uses these boxes for guests with confirmed reservations arriving after normal business hours. Lock boxes contain keys, folios, maps, etc., for our guests and are unlocked using the last four numbers of the guest social security number as their PIN. Law Enforcement and Security dispatchers at Building 384 will assist visitors with space available requirements and unexpected arrivals. This is done with just a phone call. A telephone has been installed on the outside entrance of Building 501, which allows guests to call directly to the Law Enforcement and Security dispatchers when necessary. All rooms have cable and high speed internet.

***Operational Hours***

Monday-Friday - 7 am - 6 pm

Saturday-Sunday - 11:30 am-3 pm



***OUTDOOR RECREATION, 678-1713***



The Outdoor Recreation facility is located in Building 445 on Flagler Street. The facility offers a large variety of camping equipment from tents to campers and anything else you might need for that memorable camping trip. Outdoor Recreation also has open and enclosed utility trailers for your use. Planning a party and need a place to have it? How about the ACOE Lodge located at Volunteer Park? Outdoor Recreation is

responsible for the Lodge and can book your party or event. You can even rent a dunk tank and jumping balloon for a small fee. Outdoor Recreation has a well stocked retail area where you can purchase all your gun cleaning supplies, camping accessories, and knives of all kinds as well as other items. Outdoor Recreation is the place to purchase that firearm you have always wanted. You can even purchase your New Mexico Big Game and Fishing Licenses here. Outdoor Recreation is responsible for the operation of the skeet and trap range. This facility is available on a reservation basis for four or more shooters. Need storage space for your vehicle or personal property? Outdoor Recreation is the place to call. Outdoor Recreation offers special programs that include mountain and road bike rides, hikes, and road trips to various areas in New Mexico and the surrounding areas. Be sure to check out our website at [www.wsmrmwr.com](http://www.wsmrmwr.com) .

***Operational Hours:***

Mon – Fri - 9 a.m. – 5 p.m.

Sat, Sun, & Holidays Closed



***SPORTS AND FITNESS, 678-3374***



Bell Gymnasium is located in bldg 236. The Gymnasium is equipped with men’s and women’s locker rooms, men’s and women’s saunas, plus cardio equipment and free weights. Classes offered are Pilates, Yoga and Spinning. Bell Gymnasium is in need of certified Aerobics, Pilates and Yoga instructor’s to teach daytime

classes, anyone interested please contact Bell Gym. Bell Gym has recreational leagues in softball, basketball, flag football, and golf. There are four Triathlons and two Duathlons a year, along with several fun runs.

***Operational Hours***

Monday-Friday- 5:30 am - 8 pm

Saturday-Sunday, Holidays 9 am- 6pm

Thanksgiving, Christmas & New Years – Closed



***ITALIAN CAFÉ***



- Located in Community Center
- Open lunch & dinner Mon– Sat

***CHILD DEVELOPMENT CENTER***



- Full-day and Part-day care options
- Hourly services available

***LAUNCH COMPLEX 38 CAFETERIA***



- Facility open 0630-1300, Mon – Fri

***RELIGIOUS SUPPORT***



- Protestant
- Catholic

### *MUSEUM*



- Main facility, V-2 bldg, Missile Park

### *PX AND COMMISSARY*



- Personal Service
- Commissary is open to DA Civilian residents of housing

### *MUSEUM GIFT SHOP*



- Sales of jewelry, books, artwork and collectables from local area
- Department of Motor Vehicle Registration
- Income tax preparation site

### *MEDICAL FACILITIES*




- McAfee Clinic provides 24/7 outpatient care and ambulance response and transport
- dental clinic

### *YOUTH SERVICES*



- Summer Camps
- Active 4 H and Boys Girls Clubs of America

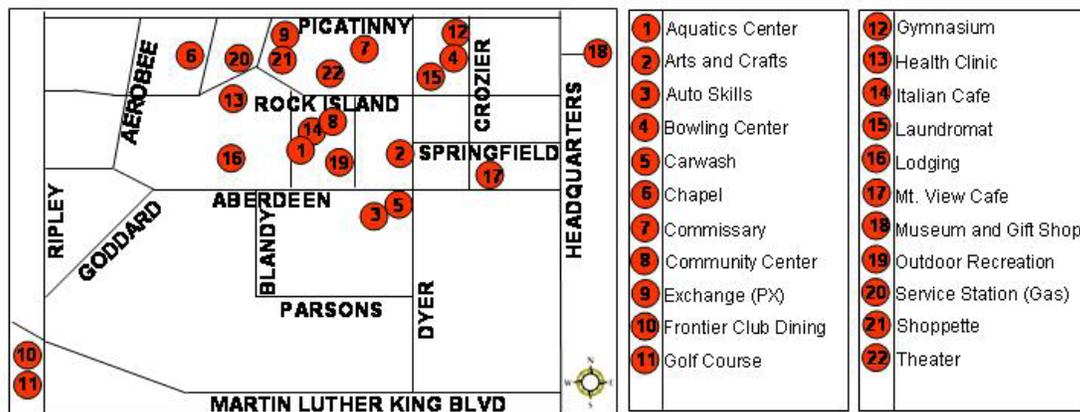

### ***MWR QUICK REFERENCE LIST***

Aquatics Center, Bldg 462, (575) 678-1068/1341

Arts and Crafts Shop, Bldg 426, (575) 678-5321

Auto Skills Center, Bldg 1430, (575) 678-5800

Bowling Center-Roadrunner Lanes, Bldg 234, (575) 678-3465/(575) 678-1394

Business and Recreation Division, Bldg 501, (575) 678-6105

Community Activities Coordinator (MWR), Bldg 501, (575) 678-1256

Community Center, Bldg 460, (575) 678-4134

Community Center, (ITR Office), Bldg 460, (575) 678-4134

Frontier Club, Bldg 1330, (575) 678-2055/(575) 678-2057

Golf Course Pro Shop, Bldg 1330, (575) 678-1759

Lodging Operations, Bldg 501, (575) 678-4559

Outdoor Recreation, Bldg 445, (575) 678-1713

Gymnasium Office, Bldg 236, (575) 678-3374

**ARMY AND AIR FORCE EXCHANGE SERVICE (AAFES):** AAFES strives to provide optimum customer satisfaction with emphasis on customer service. Their mission is to provide quality goods and services at competitively low prices and generate earnings to support MWR activities. AAFES operates the following facilities at WSMR:

<p><b>LAUNDROMAT</b>  (575) 678-3270 Coin-Operated Open 24 Hours</p>	<p><b>MAIN EXCHANGE</b> Building 260 (575) 678-2498 Mon-Fri 1000-1900 Sat 1000-1700 Sun 1000-1500</p>	<p><b>MOUNTAIN VIEW CAFÉ</b>  (575) 678-2081 Mon-Fri 0700-1300 Closed weekends, holidays, and compressed Fridays</p>
<p><b>SERVICE STATION</b> (575) 678-3182 Mon-Fri 1000-1700 Compressed Fri 1000-1400 Sat &amp; Sun Closed</p>	<p><b>SHOPPETTE</b>  (575) 678-0248 Mon-Sat 0600-2200 Sun 0800-2000</p>	<p><b>THEATER</b> (575) 678-2483 Fri, Sat &amp; Sun 1900 Mon-Thu – Closed <a href="http://www.aafes.com/ems/conus/whitesands.htm">www.aafes.com/ems/conus/whitesands.htm</a></p>

**UNITED STATES POST OFFICE:** There is a full service post office located in the WSMR main Post area.

<p>USPO, WSMR Building 153 Rock Island Street White Sands Missile Range New Mexico 88002 (575) 678-1257</p>	<p>HOURS OF OPERATION: Mon 1100-1300, 1400-1600 Tue – Fri 1000-1300, 1400-1600</p>	<p>SPECIAL HOURS AFTER MONDAY HOLIDAY: Tue 1100 – 1300, 1400-1600 Wed –Fri 1000-1300,1400-1600</p>
---	--	--

**INTERNET ACCESS:** The White Sands Post Library provides 18 computers with internet access and is set-up for wireless usage. Key codes are provided at the front desk for computer usage. Computers may be used for research and personal use. The Library is located in the Professional Development Center in Building 465.

In addition to the computer inventory, the Library houses over 48,000 fiction and nonfiction titles, subscriptions to 55 magazines, audio books, and a wide variety of other items that may be checked-out or used in-house. New titles are regularly added and reference material is continuously updated. The Technical Section contains an extensive assortment of manuals, technical papers, and books.

<p>For additional information about library services call: (575) 678-5820 DSN 258-5820</p>	<p>HOURS OF OPERATION: Monday &amp; Tuesday 0900 - 1900 Wednesday - Friday 0900 - 1700 Saturday 0900 – 1630 Sunday 1100 – 1630 Closed on Holidays</p>
--	---


**TELEPHONE:** White Sands Missile Range maintains a complex telephone network and operations system infrastructure supported with extensive platform expansions and network communications. Information on telephone services is available at (575) 678-2121 or operator assistance is available by dialing “0” from an on-post number.

- Official telephone service is provided solely for transacting official government business and is available to all organizations and contractors designated as official. Official government users are referred to as Class A1 and official government Contractors are referred to as Class A2. All official telephones have access to 800 long distance numbers and specific phones have access to commercial overseas numbers.
- Three-way conferencing and call transfer is furnished. Other features such as call waiting, speed calling, call forwarding, are available. Conference calls, also known as “meet me” lines may be arranged for accommodating up to thirty parties. These calls may include a combination of WSMR, DSN, government or commercial long distance numbers. Dial "0" for the WSMR operator, provide the names and numbers needed, and the operator will establish the call for you. To add to an existing conference call, the initiator of the call should press and release the receiver button on the set, and the operator will answer. Please remain on the line while the call is being established.
- **CELL PHONE USAGE:** Vehicle operators on a DoD Installation and operators of Government owned vehicles shall not use cell phones unless the vehicle is safely parked or unless they are using a hands-free device. The wearing of any other portable headphones, earphones, or other listening devices (except for hands-free cellular phones) while operating a motor vehicle is prohibited. Use of those devices impairs driving and masks or prevents recognition of emergency signals, alarms, announcements, the approach of vehicles, and human speech. DoD Component safety guidance should note the potential for driver distractions such as eating and drinking, operating radios, CD players, global positioning equipment, etc. Whenever possible this should only be done when the vehicle is safely parked.  
Cell phones are prohibited from usage in Building 335, the Cox Range Control Center.

## WHITE SANDS MISSILE RANGE DIALING TABLE

<b>WHITE SANDS MISSILE RANGE</b>	AREA CODE (575); DEFENSE SWITCHED NETWORK (DSN) 258
<b>POST LOCATOR</b>	0 or (575) 678-2121
<b>LOCAL AREA ON-POST</b> LOCAL CALLING AREAS LOCAL CALLING AREAS DSN	678-XXXX; 679-XXXX; 674-XXXX 258-XXXX; 349-XXXX
<b>LOCAL AREA OFF-POST</b> ALAMOGORDO, NM EL PASO, TX FT BLISS, TX HOLLOMAN AIR FORCE BASE, NM LAS CRUCES, NM SOCORRO, NM WILLIAM BEAUMONT ARMY MED CTR	9 + XXX-XXXX 7 + XXX-XXXX 7 + 568-XXXX, 7 + 569-XXXX 9 + 572-XXXX 9 + XXX-XXXX 9 + XXX-XXXX 7 + 568-XXXX
<b>TOLL CALLS</b> DIRECT DIAL FT BLISS, TX HOLLOMAN AFB, NM NEW MEXICO (ALL CITIES)* (* TOLL CHARGES ARE APPLIED FOR THIS SERVICE) OPERATOR ASSISTED / COLLECT OUTSIDE NEW MEXICO* OVERSEAS	9 + 1 + AREA CODE + XXX-XXXX 7 + 568-2121 9 + 572-1110 9 + 1 + 411  9 + 0 + AREA CODE + XXX-XXXX 9 + 1 + AREA CODE + 555-1212 9 + 0 + 1 + country code + city code + phone number
<b>INFORMATION OPERATOR</b> FT BLISS, TX HOLLOMAN AFB, NM WSMR AREA	7 + 568-2121 9 + 572-1110 678-2121, DSN 678-2121 or 0 or 114
<b>TELEPHONE SERVICES</b> HELP DESK	678-1621 or 678-1111
<b>NON-EMERGENCY</b> POLICE	678-1234
<b>EMERGENCY NUMBERS</b> AMBULANCE FIRE MILITARY POLICE	678-1234 or 911 678-1234 or 911 678-1234 or 911
<b>PUBLIC PAY PHONE LOCATIONS</b> BARRACKS COMMISSARY MAIN POST EXCHANGE ROADRUNNER LANES/BOWLING CNTR	Bldg 128 (1st Floor, West End) Bldg. 262 (Front of Bldg) Bldg 260 (Front of Bldg) Bldg 234 (Hallway)

# WHITE SANDS MISSILE RANGE MAIN POST AREA MAP:

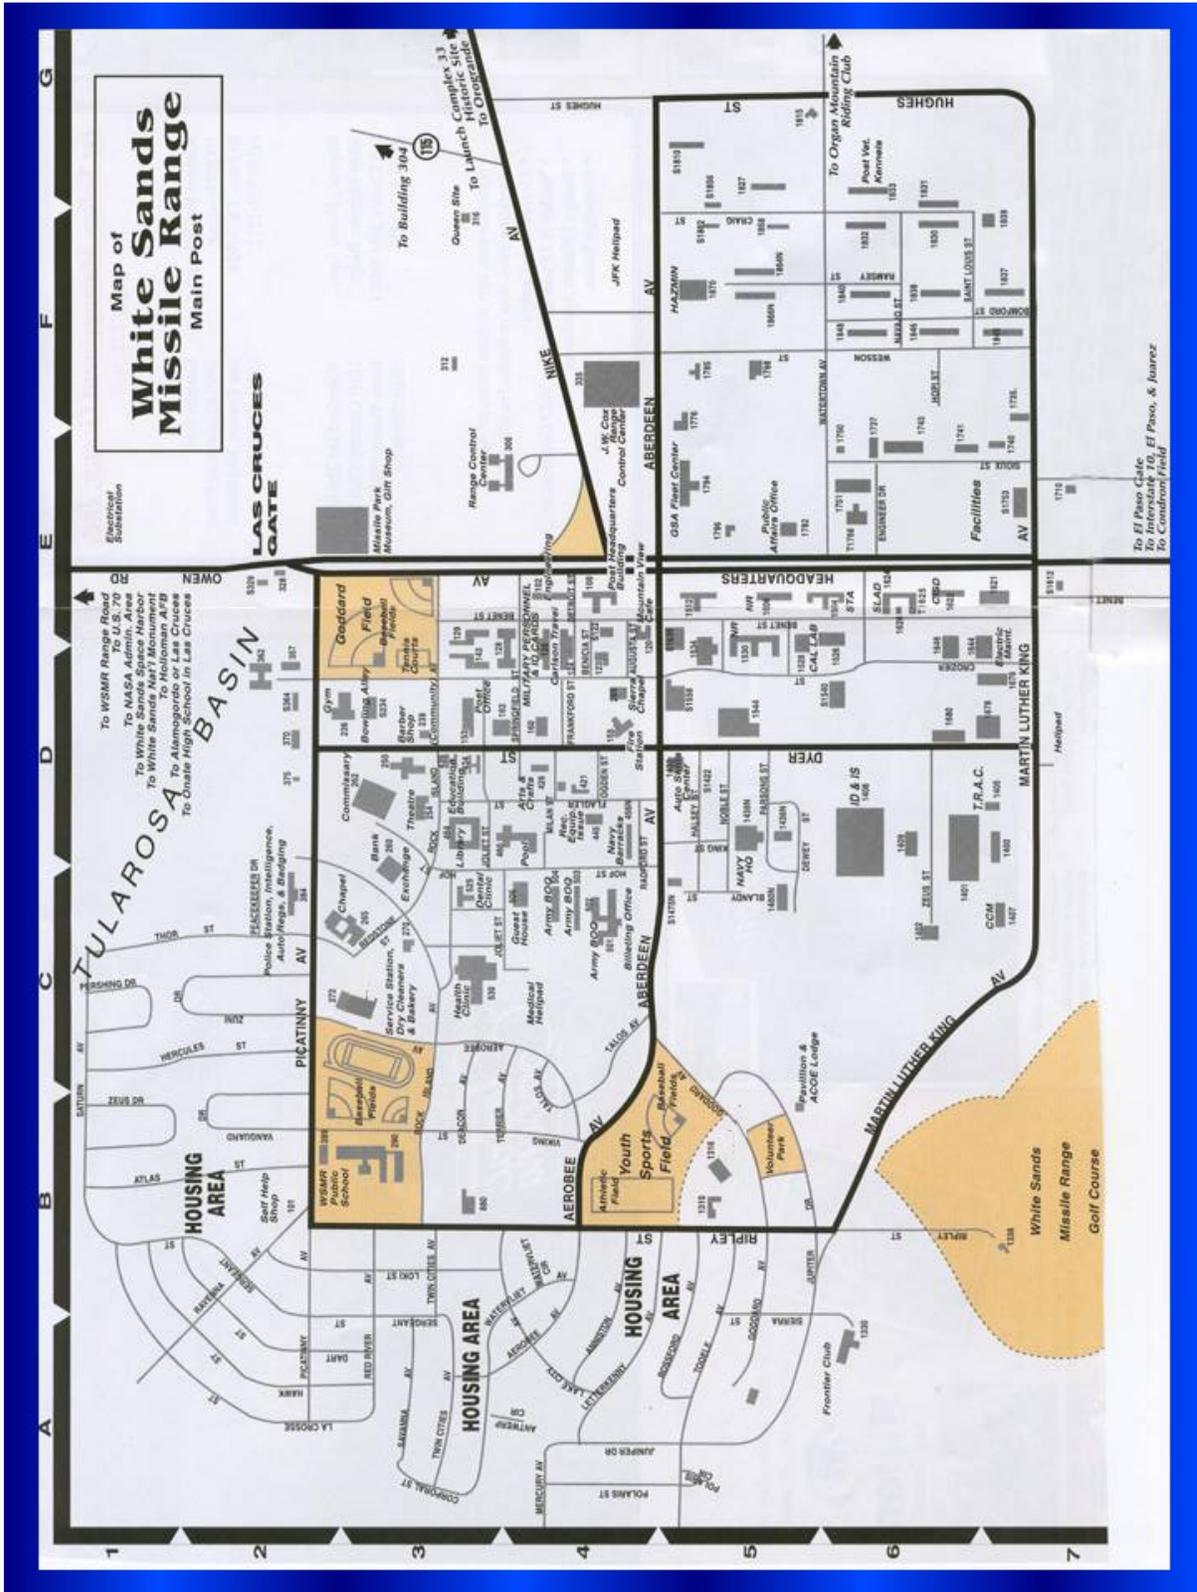

# APPENDICES



## **AIRSPACE APPENDIX:**

**GENERAL POLICY:** Airspace available for range missions consists of various restricted areas which require at least 12 hours notice to the Federal Aviation Administration (FAA), Albuquerque Air Route Traffic Center (ARTCC) for these areas. Scheduling of range airspace is normally identified by utilizing the White Sands Grip Map which uses letters for east/west areas and numbers for north/south areas. Adding the specific restricted areas in the pattern block of the scheduling form further identifies airspace needs. Planned use of Holloman Air Force Base areas (R-5107D) should be avoided between Q-T 24-50 to lessen impacts to routine flight operations. Flights that require Holloman airspace shall be above 15K when East of the “Quebec” line between 24 – 50 which will permit routine flight operations at the airfield. The Holloman airspace (R-510D) is subdivided into five areas which require 12 to 72 hours notice for recall for range support. For those missions which require airspace east of the “Quebec” line below 15K must identify the grid coordinate and airspace in the appropriate box on the scheduling form.

Recall of Fort Bliss Airspace, R-5103 A/B/C and R-5107A is coordinated by the Range Scheduling office. Ideally 30 days in advance is expected but may be coordinated seven days prior to use dependent on Fort Bliss requirements.

Flights which will exceed the boundaries of restricted airspace shall be coordinated with the FAA, Albuquerque ARTCC at least 30 days in advance or as soon as the requirements are made known. This is normally accomplished through Range Control Airspace Management Office. A comment in the remarks section of the scheduling form is needed to identify this requirement to range control and Cherokee control for day of test information. This coordination does not relieve the aircraft pilot(s) from filing appropriate flight plans for the area of operation.

The lowest altitude for routine flight operations shall be 1,500 feet above ground level (AGL) to provide airspace for under flight of helicopters in support of range missions unless to the “surface” is required. If flight below 1,500 ft AGL is required it shall be identified as “surface to (needed altitude) in the altitude block of the scheduling form.

In order to provide access to the air-to-surface ranges of the 49 Fighter Wing (FW) all aircraft when north of the 54 line shall be at or above 16,000 ft mean sea level (MSL) when east of the “PAPA line.” Missions requiring this airspace below 16,000 MSL shall be identified as “surface to (needed altitude) in the altitude block of the scheduling form.

Unless specific “safety ceilings” are published by the Flight Safety organization, no over flight of Hot Missions (Firings) or Unmanned Target Missions shall be authorized.

The scheduled aircraft start time is defined as the initial entry into the scheduled airspace per the range schedule. Aircraft entering the range from an off station location should expect a transfer of communications from the Controlling Air Traffic Control (ATC) facility to Cherokee Control prior to the range boundary. Aircraft departing from Holloman Air Force Base (AFB) shall coordinate the departure time and/or route via the Holloman Approach Control who in turn will coordinate the routing with Cherokee Control. Aircraft which may arrive early should expect to hold outside the range boundary until the airspace is available.

The scheduled complete time is defined as the time the aircraft exits the range boundary per the range schedule. Aircraft shall be returned to Cherokee Control at least five

minutes prior to the scheduled completion time in order to be off range as published. This permits time to coordinate the route with the appropriate ATC facility.


If airspace is required prior to the arrival of an aircraft, launch of a rocket, missile, artillery, or ground detonation it shall be identified in the time line when the airspace protection is needed.

No aircraft shall enter the airspace scheduled by another test mission with the approval of both test mission managers. This request shall be coordinated with range control at least 30 minutes in advance or as soon as practical on short notice.


### FLIGHT RESTRICTIONS:

- National Wildlife areas: Voluntary over flight of 2,000 feet above ground level (AGL) is recommended over the grid coordinates for: San Andres area K- N 23-34, Bosque Del Apache G - J 63-73, and Sevilleta H - M 82-90.
- Aerial Cable area: No flight below 9,000 ft MSL over N-P 62-64 unless prior coordinated through range scheduling or identified in the Operational Document.
- No flight below 7,500 MSL and avoid laterally 3,400 feet over the buildings located between N-O 16-17.
- Any other restrictions as identified on the published range schedule to ensure separation from other range missions.


### AIRSPACE GRID

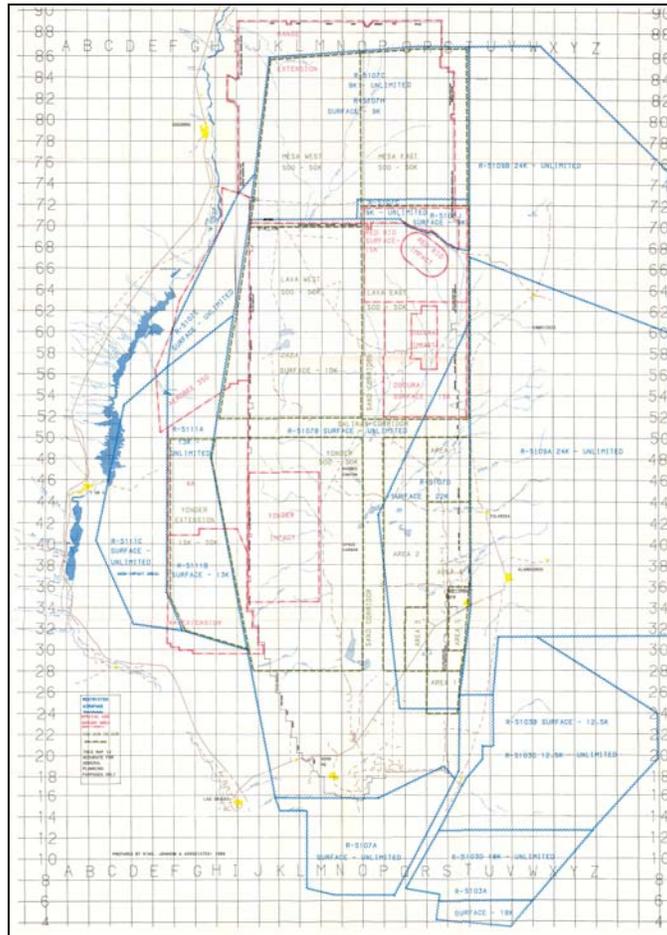

## RESTRICTED AIRSPACE

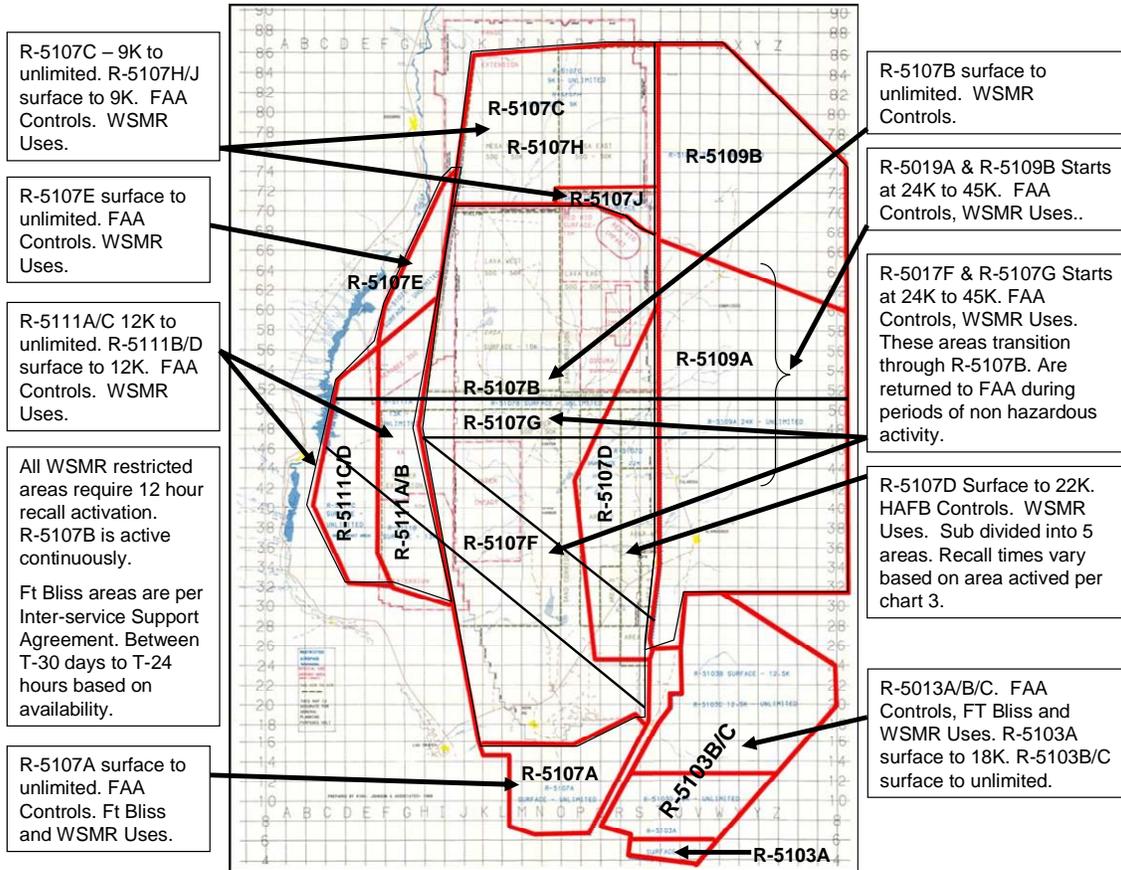

## HAFB SUB-DIVIDED AIRSPACE AVAILABLE FOR RECALL BY WSMR

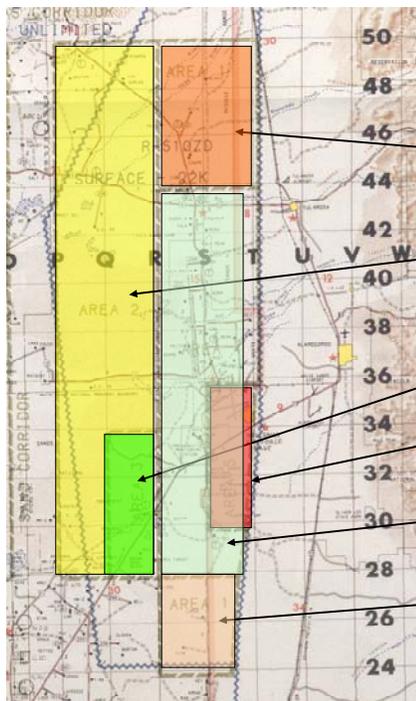

### HOLLOMAN SUB-DIVIDED AIRSPACE AVAILABLE FOR RECALL BY WSMR

- AREA-1 R – T 24 – 50 EXCLUDES AREA 4 & 5. SURFACE TO 22K. REQUIRES 72 HOUR NOTICE.**
- AREA-2 P – R 28 – 50 EXCLUDES AREA 3. SURFACE TO 22K. REQUIRES DAY PRIOR NOTICE.**
- AREA-3 Q – R 28 - 34 SURFACE TO 15K. REQUIRES 72 HOUR NOTICE.**
- AREA-5 S – T 30 - 36 SURFACE TO 15K. REQUIRES 72 HOURS.**
- AREA-4 R – T 28 - 44 SURFACE TO BUT NOT INCLUDING 15K. REQUIRES 72 HOUR NOTICE.**
- AREA-1 R – T 24 - 50 SURFACE TO 22K. REQUIRES 72 HOUR NOTICE.**

## TRAINING MISSIONS APPENDIX:

WSMR has many years of experience in planning and execution of training missions. Examples of training missions that WSMR has supported include:

- Roving Sands (world's largest multi-national air and missile defense exercise)
- Air Force tactical flight training and exercises
- NASA shuttle pilot training
- future force exercises
- Joint interoperable and live-virtual-constructive applications

Training exercises are used to establish warfighter readiness. The expansive WSMR terrain is prime location for warriors from all military services to be exposed to a variety of exercises including theater air and missile defense; joint forcible entry operations; joint medical evacuation; logistics; operational area planning, coordinating and execution; aircraft "enemy" targets; situational awareness; long and short range air defense; defense strategy development; threat intelligence; air and ground defense; synthetic battlefields; fielding new hardware; and combined maneuver and live fire unit training.

The following policy (WST 385-1) has been prepared for customers that will be using the Range for training missions:

*TEDT-WSTC*

*MEMORANDUM FOR SEE DISTRIBUTION*

*SUBJECT: Policy for Training Conducted on White Sands Missile Range (WSMR)*

*1. PURPOSE. This policy assigns responsibilities, provides guidance and establishes policy and procedures for training conducted at range areas and facilities located on WSMR. It will ensure that the White Sands Test Center (WSTC) and Garrison planners, operators and users integrate safety and risk management into the design, use, and execution of training missions to enhance combat readiness, eliminate injuries, and avoid property damage.*

*2. SCOPE.*

*a. This policy applies to all training activities conducted on WSMR. However, the following exceptions apply:*

*(1) New equipment training (e.g., during limited user testing or Operational Testing and Developmental Testing) as specified in AR 350-1 or Research Development Test and Evaluation programs.*

*(2) Users of Morale Welfare Recreation (MWR) Skeet Range or recreational areas.*

*(3) The US Army Garrison (USAG) Plans, Training, Mobilization, and Security (DPTMS) small arms range when utilized In Accordance With (IAW) paragraph 2.a. (1), 2.a. (2).*

*(4) Services training on Red Rio, Oscura Range Complex, Lava East/West, Mesa East/West, Yonder, Yonder West, Yonder South. Users of these ranges will comply with an established Letters of Agreement (LOA) and the Holloman AFB Comprehensive Range Plan as it applies to the training areas. Refer to paragraph 6.f., for unit commanders' responsibilities.*

*3. REFERENCES. See Appendix A.*

*4. DELEGATION OF AUTHORITY.*

*a. WSMR Commanders/Directors have not been given delegated authority to deviate from the provisions of this policy, unless authorized by the reference publications in Appendix A or other publications which are established to operate training ranges or exercise areas.*

*b. Waivers/Deviations regarding training at WSMR with high risk, exceeding the local unit commander's authority, will be submitted to the WSMR Commander through the commander having Training Readiness Authority (TRA) for approval/disapproval.*

*5. POLICY.*

*a. The WSTC Range Operations (RO) Directorate is the installation Operational Range Control Organization.*

*b. Due to the extensive use of range facilities on WSMR and the overlying airspace, live fire training and maneuver range activities will be coordinated/schedule through WSTC RO.*

*c. Development of new training area(s) or operational changes to established training areas will be IAW Department of the Army regulations. Requests for establishing new training ranges and areas shall be submitted to USAG-DPTMS, who will coordinate with WSTC for possible impacts.*

*d. Range users will ensure their activities are planned and conducted IAW range safety, environmental and range operational standards.*

*e. Sponsors of Special Operation Units will ensure that Director of RO and the WSTC Commander are briefed on the operations to be conducted.*

*f. All training will only be conducted in the approved training locations on WSMR.*

*g. Organizations conducting training on WSMR will comply with WSMR's safety procedures and must follow their service approved training plans/POI, syllabus, flight and ground safety policies and procedures.*

*h. Training plans must be approved and signed by the training unit commander before being submitted to WSMR for review/comment.*

*(1) The unit will submit their training plan to RO for review coordination and schedule.*

*(a) RO will coordinate safety reviews with Installation Safety.*

*(b) RO will coordinate environmental reviews with WSTC and USAG environmental.*

*(2) Conflicts regarding level of risk determination will be resolved by the commander having TRA authority for the highest level of risk.*

*i. Joint service training events such as Roving Sands will be managed by a range sponsor. Planners will ensure compliance with the appropriate service regulations and this policy.*

*j. Scheduling Procedures: All training exercises and live fire operations conducted on WSMR will be coordinated and scheduled IAW RO Scheduling Policy.*

*(1) New Mexico Army National Guard small arms training ranges near Mine Site must follow their established Standard Operating Procedures (SOPs) and WSMR procedures.*

*(2) Units performing convoy operations from garrison locations using tank trails or roadways that transition through the WSMR range area will coordinate convoy movements with RO, Range Control Branch (RO-CR) at least 24 hours in advance. Coordination will ensure commanders are aware of range activities that could impede unit movement.*

*(3) DPTMS small arms ranges are considered operational when identified on the schedule.*

*k. Electronic equipment emitting radio frequencies (RF) will follow the established WSMR procedures for such devices.*

*l. Officer In Charge (OIC) and/or Range Safety Officer (RSO) will follow the established communication procedures as prescribed in DA PAM 385-63, TC 25-8 and range SOPs.*

*m. Incident/Accident Reporting will be submitted in accordance with the Department of the Army Regulations and WSMR Commanding Generals Commanders Critical Information Requirements (CCIR) Policy.*

**6. RESPONSIBILITIES.**

*a. Director, Range Operations will:*

*(1) Appoint a Range Engineer (RE) for each training range/facility that is located outside the main cantonment area.*

*(2) Appoint an Installation Range Control Officer (RCO). For WSMR, the RCO is RO-CR Branch Chief or his designated representative.*

*b. The RCO will:*

*(1) Serve as the central point for coordination.*

*(2) Ensure Range Control personnel are appropriately trained to monitor training activities.*

*c. Garrison Commander:*

*(1) Ensure Garrison sponsored training occurring on WSMR Test Range is coordinated and scheduled with RO.*

*d. Director, WSMR Installation Safety Office will:*

*(1) Ensure compliance with procedures established in AR 385-63 and DA Pam 385-63.*

*(2) Ensure areas designated for training are safe for use, and authorized for the proposed training.*

*(3) Ensure OIC and RSO are certified by unit commanders to oversee training operations.*

*(4) Ensure that commanders of training units have evaluated their unit's readiness to safely execute the tasks/operations proposed for training.*

*e. Quality Assurance Specialist, Ammunition Surveillance (QASAS) shall monitor all live fire training areas to provide technical assistance and support on ammunition quality and explosive safety matters. QASAS from USAG or WSTC will participate in live fire training range development and planning meetings, assign personnel to training ranges during live fire exercises, ensure units are properly briefed prior to the commencement of*

*training exercises, conduct ammunition malfunction investigations, and conduct range inspections to ensure ammunition is properly maintained.*

*f. Unit Commanders:*

*(1) Ensure all training and exercises are conducted IAW operational standards, applicable service directives, and this policy.*

*(2) Adequately plan for all training and exercise events.*

*(3) Ensure that training exercises are consistent with their unit Mission-Essential Task List (METL).*

*(4) Exert appropriate command and control over unit personnel and training operations. Commanders are responsible for their unit's performance and actions while training on WSMR.*

*7. My point of contact for this policy is [White Sands Test Center Operations Office], Test Center Commander [(575) 678-1959].*

*DAVID L. MANN  
Brigadier General, USA  
Commanding*

*DISTRIBUTION:*

*A*

*Policy for Training Conducted on White Sands Missile Range (WSMR)*  
*Memo APPENDIX A*

*REFERENCES*

- AR 75-1, Malfunctions Involving Ammunition and Explosives, 23 April 2001*
- AR 200-1, Environmental Protection and Enhancement, 13 December 2007*
- AR 200-2, Environmental Analysis of Army Action, Final Rule, 29 March 2002*
- AR 350-1, Army Training and Leader Development, 3 August 2007*
- DA Pamphlet 350-38, Standards in Weapons Training, 16 August 2004*
- AR 385-10, Army Safety Program, 23 August 2007*
- AR 350-19, Army Sustainable Range Program, 30 August 2005*
- AR 385-63, Range Safety, 19 May 2003*
- DA Pamphlet 385-63, Range Safety, 10 April 2003*
- DA Pamphlet 385-64, Ammunition and Explosives Safety Standards, 15 December 1999*
- DTC 385-1 Safety Training Conducted at Ranges, Controlled by DTC Test Centers, 27 February 2007*
- FM 5-19, Composite Risk Management, 21 August 2006*
- FM 7-0, Training the Force, 22 October 2002*
- Holloman Air Force Base, Comprehensive Range Plan, 20 February 2007*
- Letter of Agreement, Tri-Service Aviation Training Operations on WSMR, 22 April 2005*
- TC 25-1, Training Land, 15 March 2004*
- TC 25-8, Training Ranges, 5 April 2004*

## **G**ROUND SAFETY APPENDIX:

**PROCEDURES:** The WSMR Safety Director, or his representative, may be present at each ground launch. He will coordinate his activities with the Project Safety Officer; however, his presence or absence in no way affects the safety responsibilities of those conducting the launch.

### **SAFETY STANDING OPERATING PROCEDURE (SSOP):**

- A SSOP for all tests presenting a hazard to personnel or materials should be submitted at least 10 work days prior to first test. Hazardous operations are defined as, but not limited to, operations involving explosives, ammunition, highly flammable or toxic products, radioactive materiel, high-pressure gases, microwave radiation or lasers. The SSOP must contain detailed operating instructions for each operation and describe all safety measures. These safety measures include, but are not limited to, protective clothing and equipment, monitoring devices, requirements for static grounding, special handling and disposition requirements or any other safety requirement peculiar to the operation.
- Previously developed operating instructions, technical publications, engineering orders and similar procedures which are acceptable to the WSMR Safety Director may be used in the operating instructions. When such publications are used, the titles and applicable portions should be identified and attached to the SSOP.
- Instructions for preparing the SSOP, including sample format, are provided in WSMR Regulation 385-15. Additional radiological health and safety requirements are identified in WSMR Regulation 40-8 and WSMR Regulation 40-9.

**CERTIFICATION OF HAZARDS:** The type and magnitude of all hazards must be reported on a STEWS-NR-P Format 1.

- If testing is conducted using various configurations, the format is required for each configuration with different hazards. Paragraph 1810 of the Operations Requirements document must include explanations to help WSMR evaluate the hazards.
- When new hazards develop in existing programs, a new hazards format must be provided at least 10 workdays before the first test.

## **FLIGHT SAFETY APPENDIX:**

**SAFETY POLICIES AND APPROVALS:** This chapter describes the policies and procedures for unmanned flight. It outlines safety principles, requirements and operational controls.

Per DoD Directive 3200.11, the Commander, White Sands Missile Range (WSMR), is responsible for unmanned flight safety on WSMR. This includes all test activities that originate from, are flight tested within, and impact into areas under the Commander's purview. There are no provisions for transferring this responsibility to the Range Customer or to another range.

The Flight Safety Branch of the Operations Control Division under the Range Operations Directorate establishes and manages the unmanned flight and laser beam safety programs for the Commanding General/Installation Director. Flight Safety prepares and implements all policies and procedures associated with the flight safety management for each test program. This includes the approval of flight profiles, ensuring flight and laser beam safety management, and the approval of flight and laser beam termination systems used at WSMR.

Flight Safety is made up of two sections: the Flight Safety Analysis Section and the Flight Safety Engineering Section.

- The Flight Safety Analysis Section conducts detailed safety assessments for tests, defines the requirements for other Range elements that support the safety management of a test, and produces safety planning documentation. The section determines the levels of risk associated with unmanned flight tests and laser beam operations and has approval authority for testing. The section also determines whether or not a flight termination system, laser beam termination system, or flight management system is required for testing. During real-time testing, the analysis section provides operational safety management.
- The Flight Safety Engineering Section is responsible for flight and laser beam termination system performance criteria and final approval of the system. Section personnel maintain positive operational control of all flight and laser beam termination systems throughout the systems' life cycles. The section also designs, procures and fabricates termination support systems. While working closely with Project and contractor personnel, section personnel ensure that development, qualification, certification, and operations of flight and laser beam termination systems comply with existing Range policies and requirements.

### **GENERAL POLICY:**

All tests involve some level of risk and that risk must be minimized. Prudent and reasonable steps must be taken to minimize the level of risk associated with the performance of a given test. However, national defense urgency, costs and test program objectives are considered.

Risk for the general public and mission essential personnel are defined in the Range Commanders Council (RCC) Standard 321 "Common Risk Criteria for National Test Ranges" and 321 Supplement. The 321 Standard also defines lethality criteria for unprotected and sheltered personnel, as well as debris damage thresholds for aircraft and ships.

Early coordination with WSMR Flight Safety should be done as early as possible, preferably during Request For Proposal (RFP) development. To minimize the costs of implementing safety requirements, flight safety data requirements, termination system design, and flight safety funding must be considered early in the development of the program. Flight safety personnel are available for assistance during system development to reduce problems during test phases. Flight Safety personnel should attend all preliminary and critical design reviews and should be given all preliminary design information. This is so personnel can identify any potential problem areas or concerns and recommend modifications prior to critical design initiation.

Some test items are sufficiently hazardous that a flight termination system (FTS) is required to ensure they can be contained within controlled areas of the Range in the event of vehicle failure. In coordination with the Project, Flight Safety typically defines the FTS concept and has final approval authority for the FTS. Test items, whose entire trajectory and ground impact footprints (including results of malfunctions and impact dispersions) that do not exceed WSMR boundaries or endanger on-range sensitive areas, normally do not require an FTS. All other test vehicles normally do require an FTS.

All UAV systems at WSMR are required to have some form of flight management system (FMS). This FMS must be well characterized, verified during pre-mission operations, and must be approved by Flight Safety. Some UAV systems, however, may be required to have a traditional, certified FTS system. Just like other systems in which a FTS is required, the UAV FTS system will have to comply with the latest version of RCC Standard 319, Commonality Standard for Flight Termination Systems. The requirement whether or not a UAV system requires an FTS to be installed will be determined on a case-by-case basis and is further discussed in the latest version of Flight Safety's UAV Policy. Copies of the policy may be obtained from Flight Safety.

All tests involving unmanned flight or laser beam propagation must be approved by Flight Safety. Approval is based upon the analysis of all hazards. After approval to test, if a program fails to maintain safety standards, approval to test will be revoked until the unsafe conditions are corrected.

Deviations from safety requirements may sometimes be necessary to meet test objectives. Waivers may be granted if test objectives are sufficiently important to justify the added risk or if national defense objectives cannot be satisfied by other means. The project must provide a written request for a waiver of safety requirements. The approval level for waivers or deviations depends on the extent and risk associated with the request.

Initiating the FTS or FMS as a common practice in order to ensure a nominally performing vehicle remains within WSMR controlled areas, normally will not be allowed. If this practice is required to accomplish a test at WSMR, a waiver must be requested by the project and final approval will be provided by the Commander through Flight Safety.

Vehicle systems that require an automatic destruct or termination, in order to safely manage the test vehicle, must be approved by the WSMR Commander. This applies to onboard or ground-based systems such as a Ground Based Auto Destruct (GBAD).

Redundancy is required for equipment or systems that are critical to the safety management of test operations. This can include equipment and systems that are both on the ground or onboard the test vehicle.

## **REAL-TIME SAFETY MANAGEMENT TRACKING:**

### **● SYSTEMS REQUIRING FTS:**

At a minimum, two independent, certified tracking sources are required during a real-time operation for vehicle systems that require an FTS, FMS, or recovery system. The exception to this rule might be a UAV system that has reached a sufficient developmental maturity level as defined by Flight Safety's UAV Policy.

The Inertial Measurement Unit (IMU) or Global Positioning System (GPS) from the test vehicle may be considered as a tracking source. Positional information available at the UAV's ground control station (GCS) may also be considered. For any of these systems, they must be well characterized, verified during pre-mission operations, and verified against Range tracking radars (if available) during flight.

A tracking aid, such as a radar transponder, may be required to improve data quality.

If tracking radars are not available or are not part of the safety management of the test, the IMU and/or GPS will be required to be certified according to the RCC Standard 342 "Global Positioning and Inertial Measurements Range Safety Tracking Systems Commonality."

Primary tracking for flight safety management must be from WSMR-provided sources unless specifically authorized and/or waived by the Commander.

**● SYSTEMS NOT REQUIRING FTS:** Vehicle systems that do not require a FTS, normally do not require real-time tracking support by Flight Safety. However, Range Control or other WSMR entities may require tracking of the vehicle to verify impact within approved areas and/or to assist in test item recovery. In the case of UAV's real-time tracking support may be required to ensure the UAV's safe co-use of WSMR controlled airspace with other vehicles.

**● OFF RANGE LAUNCH & FLIGHT CORRIDORS:** Flight corridors over non-WSMR-controlled land and airspace must be evaluated on a case-by-case basis and determined as safe after a risk assessment. Approvals must be obtained from the Commanding General, and coordination with other outside agencies, such as the Federal Aviation Administration, Bureau of Land Management, Forest Service, etc., is typically required. Therefore, early coordination with Range Operations Directorate (RO) is necessary.

Test debris (boosters, shrouds, etc.) impacts on public or private land may be planned if a negotiated agreement exists with the Landowner. Early coordination is required

**● FLIGHT TERMINATION:** The Flight Safety Officer (FSO) of the Analysis Section is responsible for flight termination. Flight termination is normally required when:

- Data indicates that the test vehicle poses a threat to sensitive areas or the Range boundaries.
- Erratic test vehicle performance in which continuation of the flight serves no useful purpose or may cause vehicle damage.
- Any possibility of loss of flight termination capability exists even though the vehicle poses no immediate hazard.

- Test vehicle performance or position is unknown. Position data of all flight test vehicles is required at all times.
- Data indicates the health and status of an existing FTS, FMS, or recovery system is abnormal or unknown. This indicates the possible loss of flight termination capability. Flight termination in this situation may occur even though the vehicle poses no immediate hazard.

Coordination with Flight Safety during the test planning stages is essential to ensure debris impacts within approved areas. All lethal debris (greater than 58ft-lb kinetic energy at ground impact) from test events must impact within WSMR-controlled land and airspace. If required, debris with less than 58ft-lb kinetic energy at ground impact can impact off-range within designated areas only and after a completed risk assessment has been approved.

Test scenarios must be planned so that normal flight and impact dispersion areas do not endanger on-range sensitive areas. Impacts will not be planned for areas in WSMR referred to as “No Use Areas” such as White Sands National Monument.

**FLIGHT TERMINATION SYSTEM REQUIREMENTS:** All flight termination systems must fully comply with the policies and guidelines defined by Flight Safety personnel. In addition, all airborne flight termination systems hardware packages shall comply with the latest version of RCC Standard 319, Commonality Standard for Flight Termination Systems. Flight Safety personnel will work with each program to ensure that all policies and requirements regarding the FTS are incorporated and completed. Electronic copies of RCC 319 as well as any of the other documents referenced in this chapter can be requested from the Secretariat, Range Commanders Council, White Sands Missile Range.

**FLIGHT SAFETY INFORMATION REQUIREMENTS:** The time required for flight safety planning varies according to the program’s complexity. The importance of early coordination cannot be overemphasized; therefore, customers are highly encouraged to meet with Flight Safety personnel early in the planning stages to discuss data and safety requirements. In some cases, flight safety requirements may even affect the design of the system and early coordination should be years in advance before testing at WSMR. It is also recommended that customers create a Flight Safety Engineering Working Group to meet at regular intervals to work out the safety requirements and to resolve any flight safety issues.

The required data is used to conduct appropriate safety and risk analyses to support the test program. From the results, Flight Safety will define evacuation areas, risk to manned sites, and define instrumentation, display, and communication requirements to support the test in real-time.

The data requirements discussed below are considered general requirements that could apply to most test programs. Flight Safety will provide a Data Requirements Letter specifically tailored for each program so that only the data requirements applicable to that program are addressed. The exception to this rule is a UAV system. The generic data requirements for a UAV system as well as further discussion concerning UAV’s are

defined in Flight Safety's UAV Policy. The information below will only address a missile and/or rocket-type system.

**SYSTEM PHYSICAL DESCRIPTION:**

- Include the physical dimension, shape and weight of the overall vehicle as well as each stage, the warhead, and payload. Also include an inboard profile drawing showing the location of FTS components.
- Identify all debris (dome closures, shrouds, interstage structures, etc.) resulting from a nominal test. Again, include the physical dimension, shape and weight of each piece.
- Include the physical description of the launcher and the launch interface equipment.

**SYSTEM FUNCTIONAL DESCRIPTION:**

- Identify all vehicle events from pre-launch through intercept and/or impact. The description should include pre-launch verification and preparation procedures, critical timelines, motor ignition sequences, etc.
- A description of the guidance system to include all operational modes from pre-launch through target intercept and/or impact is required. If the system uses an onboard inertial type navigation system, such as an Inertial Measurement Unit (IMU) or merged IMU/Global Positioning System (GPS), include a detailed description of the system. This description should include the type, drift rates, time navigation starts relative to launch, and parameters available for monitoring the system by telemetry. Selected telemetry parameters from the IMU and/or GPS system may be required to be monitored in real-time as a safety tracking data source.
- A description of the on-board telemetry system including a telemetry list and the information for processing telemetry data is required. A Hardware-in-the-Loop (HWIL) tape and Calibration Identification (Cal ID) tape will typically be required to allow the Range to verify its data processing and display configuration to support a mission in real-time. A HWIL tape shall be representative of the actual flight and exercises various telemetry functions. The Cal ID tape individually exercises telemetry analog and discrete displays. Specific requirements for generating the Cal ID and HWIL tapes will be provided by the Telemetry Data Center (TDC).
- A description of the proposed FTS for recovering or terminating the vehicle is required. Tables and/or graphs of Mach vs. Coefficient of drag or ballistic coefficient, imparted velocities and directions for all pieces resulting from a termination action are required. The kinetic energy of each of the debris pieces at ground impact should also be included. If the test vehicle includes a warhead, the effect of flight termination on the warhead must also be included in the description. If the system employs some sort of abort system, such as a parachute recovery system or fuel cut-off, this should also be described. For UAV systems with a FMS, a full description of that system should be included. Further details concerning the UAV data requirements are described in Flight Safety's UAV Policy.
- For systems with a live warhead, a functional description of the warhead is required. The description should include the arming method, how the warhead is detonated, and



the results of detonation (fragmentation, submunition dispense, etc.). This must also include the ejection velocities of any debris pieces generated as well as their mass, size, shape, material make-up, etc.

- A description of hang fire and misfire conditions is required. Include how to determine the status of the system and how to return the system to a safe condition. A hang fire is defined as the case where a voltage has been applied to the firing initiator circuit and a misfire is the case where launch has been attempted, but it has been positively determined that no voltage has been applied to the firing initiator circuit. If a misfire cannot be positively confirmed, a hang fire condition will be assumed, which could delay lifting of roadblocks.

#### **TRAJECTORY INFORMATION:**

- A nominal trajectory simulation at true 20Hz and true 1Hz rates from liftoff to impact is required. Coordinate with Flight Safety for proper format.
- Additional trajectory simulations should also include expected three-sigma in-flight variances in both the lateral and pitch planes. The variances are those that are considered to be caused by normal engineering variances, thrust misalignments, hot/cold motor conditions, etc.

#### **VEHICLE FAILURE MODES AND PERFORMANCE CHARACTERISTICS:**

- Maximum energy footprints (which assume no FTS action) based upon total system energy must be generated. This should define the maximum distance a vehicle can travel in any direction, given all possible failure modes and should take into account the lethal area of the warhead if applicable. Over-the-shoulder capabilities should especially be considered as part of the maximum energy envelope. If the vehicle does not have an FTS, the final decision to fly without an FTS will be made only after the maximum energy footprints have been analyzed by the analysis section.
- Provide the maximum maneuver capability of the test vehicle, in terms of longitudinal and lateral acceleration. The limiting factor for the maneuver capability should be either the structural limit or the aerodynamic limit, whichever is capable of producing the maximum carry range. The nominal maneuver capability of the vehicle should also be included.
- Three-sigma worst case failure trajectories which show the effects of cumulative in-flight failure modes are required. At selected subsequent times beginning at launch, missile failures should be modeled to initiate turns of the vehicle to the point of the vehicle becoming aerodynamically or structurally unstable and then sustained for ten seconds to show lateral dispersion. In a like manner, worst case trajectories should also be generated in the pitch plane (pitch up or down). A complete description of the assumptions and methodologies for generating the worst case turns should be included.
- A Failure Modes, Effects, and Criticality Analysis (FMECA) identifying all credible failures, the effects of the failures on the vehicle, and the probability of occurrence shall be provided. Of particular interest are those failure modes that result in large deviations from the planned flight path and their probability of occurrence. If historical flight or firing data is available, it should also be provided. This should include the total number of firings, the number of failures, a description of the failures and the resultant impact from the failures.

- For vehicles equipped with an FTS, arming the FTS prior to launch is a critical issue. If the FTS is not armed prior to launch, an analysis must be provided defining the earliest possible FTS arm time and the potential failure modes from launch until FTS arming occurs. The analysis should include a complete description of all assumptions.

**LASER SAFETY APPENDIX:** This chapter describes the policies and procedures for laser beam safety including categories of operations, procedures, and required documentation.

**CATEGORIES OF OPERATIONS:** Laser operations are divided into hazardous and non-hazardous categories, depending upon potential risk to personnel and property.

**PROCEDURES:**

- To analyze each laser system to determine the degree of hazard, the following information will be required for the analysis:
  - Wavelength.
  - Divergence (must be specified as full angle or half angle).
  - If laser is continuous wave, provide the peak power.
  - If laser is pulsed, provide the entire range for of the following:
    - ✦ Pulse repetition frequency.
    - ✦ Number of pulses in a train.
    - ✦ Pulse width.
    - ✦ Energy per pulse.
  - Beam diameter at aperture and/or beam diameter at waist.
  - Aperture to waist distance.
  - If Laser beam geometry is elliptical or rectangular, provide X and Y diameter and X and Y divergence.
    - ✦ For each hazardous laser system, Flight Safety prepares a program plan in response to the customer's Program Introduction document and describes the laser beam safety test procedures. Enough detail should be provided to determine the safety requirements of the laser operation. Also, Flight Safety will prepare a Flight Safety Operational Plan. The following information is required for this plan:
      - Envelope of laser and target location combinations to allow for an analysis of all possible hazard areas.
      - Range of azimuth and elevation of lasing for each laser and target location combination.
      - Range of tracking rate.
      - Jitter.
      - Focus range limits.
      - Focus spot size.
      - Lasing shutdown procedures.
      - Description of the aiming procedure and safety controls, usually contained in a SOP.
      - Any proposed mitigation of hazards.
- Flight Safety ensures the project has coordinated the test with the U.S. Space Command Laser Clearinghouse to determine the need for predictive avoidance.

**DOCUMENTATION:** A Safety Standing Operating Procedure (SSOP) is required for each hazardous operation. This SSOP must provide detailed operating instructions for each phase of the operation.

## **EXPLOSIVE ORDNANCE DISPOSAL APPENDIX:**

Requests for disposal of explosive or hazardous material must include an itemized list identifying the item, quantity, classification and hazard in the Operations Hazard Statement in accordance with WSMR REG 70-8. All material associated with a weapons or other tested system are required to have an explosives and hazard classification prior to testing at WSMR. This classification information should be provided to the Test Officer and to Range clearance personnel prior to the onset of testing.

Unclassified and nonhazardous debris must be disposed of by the Range customer in accordance with WSMRR 755-3.

Customers are responsible for providing full funding for final disposition of their material through WSMR Range clearance operations personnel.

Any time an item is modified after arrival a form ESW-1160 must be completed and presented during turn-in to the Ammunitions Supply Point (ASP). This is to ensure any change in the Hazard Classification is identified, and provides a secondary source of item modification history.

RDT&E material and Troop training/Basic Load Ammunition and Explosives will not be mixed in storage.

# FREQUENCY UTILIZATION AND MANAGEMENT POLICY APPENDIX:

## PROCESS AUTHORIZATION:

- Requests by Department of Army (DA) elements at WSMR for new or modifications of existing Radio Frequency Authorizations (RFA's) should be made to the WSMR Range Frequency Manager at TEDT-WST-DSSTR on the Standard Frequency Action Format (SFAF). The lead time for temporary and permanent assignments is at least 90 days. Other DoD elements submit their requests for new or modified assignments through their appropriate service channels. Commercial corporations submit RFA requests for equipment using government bands through their DoD or Range sponsor to the DoD Area Frequency Coordinator at WSMR. For non-government bands, submit a copy of the FCC license to the Range Frequency Manager at TEDT-WST-DSSTR for a local Radio Operators Permit.
- Lead times for renewal requests are the same as for new requests. Identify the time required, with reason for extension and certify that no changes have been made in the characteristics, location, use, or operation of the equipment.
- List all frequencies used by non-Range instrumentation. Each RF or RF band should be identified by number beginning with "1." Customers engaged in ECM operations may state RF and RF protection requirements (when unclassified) by band and channel codes specified in *AFR 55-44*, *AR 105-86*, *OPNAVINST 3430.9c*, *MCO 3430.1A*. In these cases, no additional identification is required. Include special permission by the DoD Area Frequency Coordinator for Electronic Counter Measure (ECM) or chaff as required by *AR 105-86*.
- For each frequency listed, state the radio frequency authorization, purpose, RF protection requirement, and emission characteristics. Specify the test period of use including pre-test open loop test. RF protection must be stated in exact frequency (e.g., 2900 MHz) or RF band (e.g., 2900-2930 MHz). RF band letter designations are a source of confusion and are not used.
- Emitter Integrated Frequency De-confliction System (EIFDS) resolves conflicts in the use of the frequency spectrum between several customers operating simultaneously on the Range. The procedure applies:
  - When a testing program uses more than one frequency to conduct its test requirements.
  - When mission or range support radio frequency (RF) transmissions interfere with other projects across several ranges and/or DOD Area Frequency Coordination (AFC) areas.
  - When area spectrum coordination is required for command and control, command destruct, flight termination, airborne telemetry, air combat training systems, and Unmanned Aerial Vehicles (UAVs).
- Day of Test frequencies will be coordinated with the Frequency Coordinator to avoid any potential conflicts. If frequency conflict arises during the Day of Test, then the EIFDS system will be used to resolve all frequency conflicts.

- Authorization and clearance for use of all RF's is required. Acceptance and supportability of the testing program by WSMR is not a frequency allocation or assignment.
- For radio frequency allocation, assignments, and use, see *WSMRR 105-11*. Requests for RF radiation will be approved only for those customers having a valid Radio Frequency Assignment (RFA).
- Lead times for renewal requests are the same as for new requests. Identify the time required with reason for extension and certify that no changes have been made in the characteristics, location, use, or operation of the equipment.
- Deletion requests are submitted to Frequency Surveillance Station at TEDT-WST-DSSTR within 10 workdays after determining that the RFA is no longer required.
- Restricted RF bands are used on a shared and scheduled basis. Requests for restricted RF bands can be provided by the Frequency Manager. All operations using these bands must schedule their use with the Systems Control Office at TEDT-WST-DSSTR.

#### **ELECTRONIC COUNTERMEASURE ACTIVITIES:**

- Assistance in obtaining ECM clearance at WSMR, New Mexico, far-west Texas, eastern Utah, and western Colorado areas is available from the DoD Area Frequency Coordinator's Office at WSMR, (575) 678-0123 via the Test Officer.
- Operational procedures governing ECM are regulated by *AFR 55-44*, *AR 105-86*, *OPNAVINST 3430.9c*, *MCO3430.1A* and by the DoD Area Frequency Coordinator.
- *DD Form 1345* (Local Frequency Clearance) must be submitted for ECM tests. TEDT-WST-DSSTR will issue an ECM "STOP BUZZER" if interference results from the ECM operation.
  - *WSMR Reg 105-10* describes telemetry RF spectrum usage
  - Reporting of Meaconing, Intrusion, Jamming and Interference (MIJI) is required.
    - Immediately report all details of the incident directly to the Frequency Interference Resolution Officer (TEDT-WST-DSSTR) including when MIJI ceases.
    - Categorize the incident whether meaconing, intrusion, jamming, or interference.
  - Assistance in obtaining frequency assignments is available from the WSMR Frequency Manager or the DoD Area Frequency Coordinator's Office, (575) 678-0123 via the Test Officer.

#### **FREQUENCY SURVEILLANCE STATIONS: NUMBER AND TYPE (FREQUENCY RANGE):**

- 7 Fixed (10kHz -18 GHz)
- 5 Mobile (10 kHz - 12 GHz)
- 1 Transportable 5th Wheel (10 kHz - 18 GHz)
- 1 Transportable Surveillance Station (20 MHz -20 GHz)
- 1 Mobile Surveillance Station (10 MHz -40 GHz)

● **FREQUENCY SURVEILLANCE SUPPORT:**

Frequency Coordinator recommends frequency surveillance support requirements be submitted prior to program introduction phase.

● **OTHER COMMUNICATION SYSTEMS:**

Transportable communications systems are used to support off-range, interim, and emergency requirements. The systems consist of various 23 GHz transportable microwave radios capable of providing remote-location digital communication links for telephone, data, and voice circuits. These systems are assembled on a program requirement case-by-case basis and consist of transportable 1,000 watt radio command guidance and control units capable of transmitting the 20 standard Integrated Range Instrumentation Group (IRIG) tones. Extensive intercom facilities (networks and equipment) are located at range instrumentation and customer sites.

## FINANCIAL SYSTEMS APPENDIX:

### VISION DIGITAL LIBRARY SYSTEM (VDLS):

**USAGE AND PROJECT STRUCTURE:** *DTC Reg 73-1, Para 4.c (11)*

Test center test officers will ensure that test data and test project documentation are entered into the VDL and that proper access is provided for review and distribution. The Required Project Structure is defined in DTC Pam 73-1.


- **TEST INCIDENT REPORTS:** *DTC Reg 73-1, Para 4.c (12):* Test center test officers will ensure that all TIRs are entered into the Army TIR System (ATIRS) in accordance with DA Pamphlet 73-1, paragraph 6-29, and appendix V. Classified TIRS will be posted to SVDL.
- **SECURE VDL (SVDL):** A secure version of the VISION Digital Library System (SVDLS) is available to support all ATEC classified projects. SVDLS is used as a central location database to receive, store, and access classified project data and documents such as test plans, test reports and capability and limitations (C&L) reports. Like VDLS, it requires a user ID and password. SVDLS is physically separated from the unclassified VDLS and must be accessed through the Secure Internet Protocol Router Network (SIPRNET).
- **10-SERIES REFERENCE:** (<https://tecstar.dtc.army.mil>): *DTC REG 10-6: Organization and Functions; Mission and Major Capabilities of the US Army White Sands Missile Range, 14 Dec 05.*

### REQUEST FOR TEST SERVICES (RFTS):

**SUBMISSION OF RFTS AND DTC REGULATIONS:** Provide a description of the test or services required. Identify unique characteristic which might require special test and analysis requirements. Include existing or planned systems with which the item will interface. Any additional pertinent documentation (for example, other test plans, specifications, MIL-STD's) that would assist in the development of the scope of work should be referenced.

- |                                  |  |
|----------------------------------|--|
| ● Test Title                     | ● Test Center test officers will ensure that |
| ● System                         | SOMTE requirements are addressed in          |
| ● Model Number                   | accordance with DTC Reg 73-6                 |
| ● Test Description/Scope of Work | ● Preferred Test Center                      |
| ● Number of Test Items           | ● Test Location                              |
| ● Military Test Players:         | ● Point of Contact                           |
| DTC Reg 73-1, Para 4.c (7),      | ● Start Date/Completion Date                 |
|                                  | ● Other Dates                                |
|                                  | ● Explanation                                |

# Establishing a DT Project

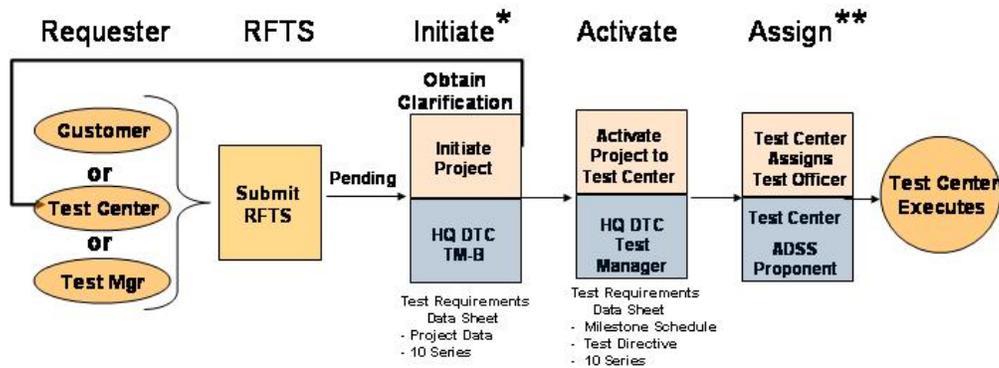

\* Sends an e-mail to requester with ATEC Project number

\*\* Sends an email to test officer and budget officer assigned with:  
 - ATEC project number  
 - DTC test manager (Name and Phone Number)

## SAFETY CONSIDERATIONS:

- ADSS and VDLS: A copy of the Safety Assessment Report (SAR) should be provided prior to any testing, if it is an Army System
- Army policy requires that testing will not begin until a SAR has been received from the test sponsor, reviewed and accepted by the government organization performing the test (*Army Regulation 385-16*)

## ENVIRONMENTAL CONSIDERATIONS:

- Provide any environmental considerations that might impact on the accomplishment of the requested effort
- Provide appropriate documentation in accordance with the National Environmental Policy Act (NEPA) and Army Regulation 200-2. For example:
  - Record of Environmental Consideration
  - Environmental Assessment
  - Environmental Impact Statement

## SECURITY CONSIDERATIONS:

- Address any security considerations, for example, applicable provisions of the security classification guide or security checklist and any applicable OPSEC requirements, if appropriate (*Army Reg 530-1*).

**TEST DIRECTIVES IN ADSS:** *DTC Reg 73-1, Para 4.a (7) (h)*: Headquarters, DTC test managers will prepare a test directive prior to activating test projects in ADSS.

**ENVIRONMENTAL DOCUMENTATION:** *DTC Reg 73-1, Para 4.c (9):* Test center test officers will coordinate the environmental documentation with the test center's environmental coordinator to ensure compliance with *DTC Regulation 200-1*.

**SAFETY ANALYSIS REPORT (SAR):** *DTC Pam 73-1, Para 4-7.b (11):* Test center test officers will acquire the Safety Assessment Report (SAR) as early into the test planning process as possible.

**SAFETY RELEASE/CONFIRMATION RECOMMENDATIONS:** *DTC Pam 73-1, Para 10-2.e (1) & (2):* A Safety Release/Confirmation Recommendation is prepared by the test center at the direction of the DTC test manager by means of the test directive or other direct guidance.

**SAFETY RELEASES/CONFIRMATIONS:** *DTC Reg 73-1, Para 4.a (7) (w):* The HQ DTC test managers will generate Safety Releases and Safety Confirmations

**TEST PLAN REQUIREMENTS:** *DTC Reg 73-1, Para 4.c (5):* Test center test officers will ensure the existence of a test plan for all test projects. Obtain the required levels of approval before the start of testing and *DTC Reg 73-1, Para 4.c (6):* Test Center test officers will ensure the information from published Test Operations Procedures/International Test Operations Procedures (TOPs/ ITOPs) is used in preparing test plans, test reports and in conducting tests, including customer tests. All tests are required to have an OPSEC plan.

**TEST READINESS REVIEW REQUIREMENTS:** *DTC Reg 73-1, Para 4.b (4):* Commanders, DTC test centers, will ensure that a test readiness review is conducted for acquisition non-evaluated and non-acquisition projects to determine if the project is ready for formal testing. These reviews will be chaired at the GS-15/LTC level or their designees.

**DOCUMENTS REQUIRED PRIOR TO TEST INITIATION:** *DTC PAM 73-1*

- Test directive
- Approved EDP, if required
- Appropriate environmental documentation
- Safety Assessment Report or other safety documentation
- Security classification guidance
- SSP
- Standard Operating Procedure (SOP) covering hazardous operations
- Safety Release and HUC review for training or testing involving non-test certified Soldiers
- Approved test plan
- Funding document

**COST ESTIMATES:** *DTC Reg 73-1, Para 4.c (3):* Test center test officers will prepare the official cost estimate for the directed test. A preliminary budgetary estimate may be provided to the test sponsor with a copy furnished to the Headquarters, DTC, project point of contact prior to the test center's receipt of the test directive or ADSS assignment.

The official cost estimate will be placed in ADSS and *DTC Reg 73-1, Para 4.c (4)*: Test center test officers will ensure funds are received prior to initiation of test.

**TEST AND SCHEDULE CHANGES:** *DTC Reg 73-1, Para 4.c (8)*: Test center test officers will ensure modifications to test plans are coordinated and approved by the customer. For acquisition-evaluated projects, ensure modifications are coordinated with Headquarters, DTC and *DTC Reg 73-1, Para 4.c (10)*: Test center test officers will keep Headquarters, DTC informed of scheduling changes or conflicts and critical test item events, particularly safety-related events, high-level visitors, and other events critical to the success of the project.

**TEST PROJECT VALIDATION:** *DTC Reg 73-1, Para 4.c (13)*: Test center test officers will maintain and validate cost and schedule information at least monthly for acquisition-evaluated test projects and other test projects with cost estimates greater than 100K in ADSS while the test is in the execution phase.

**TEST REPORT REQUIREMENTS:** *DTC Reg 73-1, Para 4.c (14)*: Test center test officers will prepare the type of test report as designated in ADSS. Obtain the appropriate approval of the test report as specified by the test directive and/or ADSS milestones and

- *DTC Reg 73-1, Para 4.c (15)*: Test center test officers will label all data release “Preliminary” and label all cost estimates, test plans, or test reports as “Draft” prior to approval, in accordance with *ATEC Regulation 73-1*, paragraph 5-6 and *DTC Reg 73-1, Para 4.c (16)*: Test center test officers will, after approval, distribute the report and provide a copy to the Defense Technical Information Center.

## **T**ELEMETRY SYSTEMS APPENDIX:

The Telemetry System consists of a mixture of fixed and mobile facilities located at optimum sites for mission support. The received telemetry signals are relayed to the Telemetry Data Center (TDC) in the Cox Range Control Center. Special Purpose Vans are also used for receiving and recording telemetry data in support of range customer requirements. The telemetry system can receive, record, demultiplex, and format to IRIG Telemetry standards. The Telemetry System is capable of transmitting and relaying encrypted data if required by the customer.

The Telemetry System consists of digital microwave radio and fiber optic links throughout the range that are used to relay the telemetry data to the Telemetry Data Center (TDC) located in the Range Control Building. The Telemetry Acquisition System consist of Fixed Sites and Suites; Mobile Telemetry Systems (MTS); Interferometer Systems; and Translated GPS Ranging System (TGRS).

The Fixed Sites are J-1, J-3/13, J-10, J-56, J-67, and J-167. These sites are capable of acquisition, reception, conditioning, distribution, recording, and relaying. The suites consist of the Transportable Telemetry System (TTAS) and the Transportable Telemetry Acquisition and Relay System (TTARS). Currently, there are three TTAS systems and two TTARS at WSMR.

The Mobile Telemetry System (MTS) combines the TTAS, TTARS and Mobile Telemetry Vans (MTV) which can provide high data rate handling capabilities.

The WSMR Telemetry group also uses the Single/Dual Remote Data Acquisition System (RDAS) that provides near-launch flight deviation data for WSMR Flight Safety.

The Translated GPS Ranging System (TGRS) uses a satellite based tracking system which utilizes an on-board Digital Frequency Translator (DGT) and 4 Ground Based Translator Processing System (GTPs). The data product (position and velocity) is available for real-time and post flight use. The GTP's are located at the fixed TM sites, and the downlink from the DGT is tracked by S-Bands trackers.

### **DATA CAPABILITIES:**

The Telemetry System is capable of supporting both L and S Band frequencies. L-Band frequencies supported are: 1435-1491Mhz, 1526-1540MHz, and 1700-1850MHz. The S-Band frequency range supported is 2200-2400 MHz. The TM system is capable of receiving PCM/FM up to 20 MB/sec (NRZ-L) for one link. The system can relay one channel of 20 MB/sec or 10 channels up to 30 MB/sec. The TM system can support up to five (5) airborne targets on the range simultaneously.

The Receiving systems can handle five (5) telemetry carriers, or ten (10) carriers with no diversity combining. The sites can record up to 30 MB/sec (armor Metrum). The TM system can use the following IRIG modulations (multi-downlinks): PCM/FM, PCM/FM/FM, SOQPSK, FM/FM, and FM/FM/FM. Data can be recorded on using various medium: VHS and METRUM Digital Magnetic Tape, and in the near-term Hard-drive/DVD.

### **TELEMETRY DATA CENTER:**

The Telemetry Data Center (TDC) provides White Sands Missile Range with one of the premier telemetry data processing and display facilities within the Department of

Defense, and is the primary telemetry processing facility at WSMR. The TDC has the necessary software that extracts real time telemetry data and presents it in real time via PC based graphical displays and/or strip chart recorders. This visualization provides customers with an intuitive grasp of the missile's spatial situation.

The TDC support consists of: Operation, Engineering, and Customer Liaison. Operation support entails providing real-time mission support, off-range mission support, equipment readiness, process definition, and telemetry verification and validation. Engineering support consist of system architecture and design, mission software support, V&V test design, systems performance analyses, real-time display software design, and customer coordination, where the customer requirements are met and provided timely data products.

Post-test processing requires information from the customer and is usually provided prior to any testing conducted. A telemetry format should be provided to the range so that the TDC equipment can be adjusted to provide customers the appropriate information per their requirements.

#### Raw Data Recordings:

- Serial or Multiplexed Metrum Helical Scan Tape
- Metrum Compact Disk & Digital Video Disk
- Sony 8mm Helical Scan Tape
- Digital archival
- Floppy and Compact Disks
- Zip (100Mb/250Mb) and Jaz (1Gb/2Gb) Disks
- S-VHS tape
- Digital Video Disk (DVD) with both Video and TM data
- Mini DV Tape
- Real Time Graphical Displays and Strip Chart Recordings
- The TDC can also provide embedded telemetry seeker video displays, and 2D/3D computer generated graphical representations of TM data.

## **RADAR SYSTEMS INSTRUMENTATION APPENDIX:**

### **ARMY NAVY MOBILE PULSED SYSTEM (AN/MPS)-39 MULTIPLE OBJECT TRACKING RADAR (MOTR):**

The AN/MPS-39 Multiple Object Tracking Radars are White Sands Missile Range's most modern instrumentation radars. WSMR operates two MOTR systems. They are phased array radars, each capable of simultaneously tracking up to 40 objects within a scan volume of 60 degrees by 60 degrees.

Each MOTR phased array antenna is mounted on an azimuth over elevation pedestal so that full hemispheric coverage is possible. The accuracy of the radar is 0.1 mils (approximately 0.1 milliradians) in angles and 3 yards in range. The peak power of the radar is one-megawatt, but a mix of six different waveforms provides for a total average transmitted power of 5000 watts, the highest of any of the WSMR radars. The MOTR is capable of tracking a six-inch sphere to a range in excess of 120 km.

These are transportable radars but each has a semi-permanent home site; one at Wise Site in the south part of the range and one at Russ site in the mid-range area.

The MOTR is fully coherent. This allows the received phase data, in the form of In-Phase and Quadrature video, to be recorded on all tracked targets. These measurements form the basis for Target Motion Resolution, an extremely sophisticated set of software that provides measurements such as spin, detection of events, precise radial velocities, and detection of deployed targets.

The MOTR also records multiple range gate data. Multigate data provides a record of targets in the range co-ordinate centered about a tracked object. It is used in providing miss-distance, verifying missile impacts, assessing kinetic energy transfer of impacts, and investigating debris cloud growth. One hundred and twenty four range gates are recorded for each track file. The gate spacing can be set to in discrete steps from 15.625 yards to 125 yards giving a maximum range extent of 14.1km.

The MOTR's electronically scanned array provides a set of detection and acquisition features not found on conventional single tracking radars. Each object file can be separately set for scanning sub volumes of the array space. These can be initiated simultaneously through the use of a 'multi-arm' feature, or a scan can follow a tracked file in 'intercept' mode. Intercept mode is useful for automatically detecting and tracking many objects deployed from a common vehicle, e.g. bomb drops and submunition deployments.

### **MOTR SYSTEM DESCRIPTION:**

WSMR operates two MOTR radars, Serial Number 01 located at WISE Site in the south part of the Range, and Serial Number 03, located at Russ on the eastern boundary of the mid-range area. Both MOTR's have nearly identical configurations.

The MOTR radars are used for general support of nearly all of the open air tests conducted at WSMR. The radar is a phased array radar. Its antenna can be steered through a combination of electronic and mechanical equipment. This allows it to share its resources (e.g. transmitted power, duty cycle, PRI, and even the operators) among up to forty track files. More often the MOTR is set to spread its resources among only one to six targets.

The MOTR can track in either skin (echo) mode or transponder mode. In skin mode the radar tracks the signal returned by the transmitted energy reflected off the target. In transponder mode, the radar tracks the signal emanating from a small onboard transceiver. Generally, transponder mode is preferred because the signal is stronger and the track accuracy is corresponding higher. Additionally, transponders provide discrimination between multiple targets and they can often mitigate the effects of ground clutter.

The primary data of from the MOTR is real-time Time Space Position Information (TSPI) on one or more tracked targets. This data is used for developing the Instantaneous Impact Predictor (IIP) used for making real-time Flight Safety decisions. Other data includes calibrated signal levels used to measure radar cross section, digitized coherent in-phase and quadrature video use for Target Motion Resolution (TMR) and multiple-range gate data used for miss-distance and debris analysis.

The MOTR radars consist of four major components: an electronics van, a pedestal/trailer, the antenna array, and a boresite tower. The electronics van houses the control consoles, waveform generator, IF receiver, servo controller and mainframe computer used to operate the radar. This van also has power distribution and communication gear to interface the radar by voice and data lines to the rest of the missile range.

The pedestal trailer is another major component of the radar. It supports the transmitter shelter, the compressor/dehydrator, the servo amplifiers, and the pedestal of the antenna. The antenna sits atop the pedestal. However, it travels on a separate transporter and is installed on the pedestal with a separate crane when the radar is installed at its operating site.

The last major piece of equipment is the boresite tower. The boresite tower consists of a 100 foot scaffold tower with feed horns and optical targets mounted at the top. A small shed at the base of the tower houses the equipment used to simulate a radar signal. The tower is needed to properly calibrate the radar.

## **MOTR DATA PRODUCTS:**

**Real-Time TSPI data.** This is the primary data product of the MOTR. It is transmitted at a rate of 20 samples per second to the Range Control Center (RCC) located in Building 335. The data consists of Range, Azimuth, Elevation and signal level measurements and an indication of the track mode associated with each track file. The range is transmitted with a granularity of one yard, its precision is generally between one and three yards, and its absolute accuracy is better than 10 yards. The corresponding values for azimuth and elevation are 19 bits encoder granularity, .2 mils precision, and .1 mils absolute accuracy. Generally, the overall accuracy of the radar is such that any target on range can be tracked to within 50 feet of its absolute location.

Post-Mission TSPI. The same data that is transmitted to RCC in real-time is also recorded on site. Usually, the data is simply used for redundancy in case the real-time data transmission process malfunctions.

**Target Motion Resolution.** Target Motion Resolution is an extremely sophisticated set of software that provides measurements such as spin, detection of events, precise radial

velocities, and detection of deployed targets. It is a post flight process that uses as its starting point the coherent information encoded as digitized in-phase and quadrature (I&Q) video. It is currently carried by courier to the post flight data processing center where the TMR tools and techniques are applied to the coherent I&Q data.

**Signature Analysis.** Dynamic Radar Cross Section (RCS) analysis can be estimated in a post flight setting by utilizing calibrated measurements of the received signal from a tracked target. The process combines aspect angle data derived from the TSPI track with the calibrated signal level received at the radar at that particular aspect angle. This data is often useful in validating RSC turntable measurements and for estimating the level of debris after an intercept.

**Multiple Range Gate Measurements.** Multi-gate data provides a way to deployed targets, debris, or other objects within a fixed volume surrounding a tracked target. Standard I&Q video data is recorded in 124 gates centered on a tracked object. The spacing of the gates can be set to cover a range extent from 1.7 km to 14.1 km. Using multi-gate, an analyst can observe many more targets in the vicinity of the tracked object. Of course the objects have to be resolvable, meaning that they must be spaced at least 35-50 meters to be observed as separate targets.

#### **ARMY NAVY FIXED PULSED SYSTEM (AN/FPS)-16 INSTRUMENTATION RADAR:**

WSMR operates ten AN/FPS-16 instrumentation tracking radars. The FPS-16 was the first instrumentation quality radar built especially for the test range environment. It was designed by RCA and first deployed in the late 1950's and early 1960's. The first FPS-16, Serial Number 01, was activated by WSMR in 1958 at the R112 site where it supported missions on a daily basis until it was retired in the early 1990's. Over 100 FPS-16 have been built and deployed throughout the world. Many are still in service, although most have been updated with more modern electronic systems.

The FPS-16 is a pulsed radar that operates at C-Band frequencies between 5.4 and 5.9 GHz. It is capable of tracking a single target as small as a six inch sphere with an accuracy of better than 3 yards to a distance of almost 100 kilometers. The radar can track in two modes: echo, where the radar locks onto the reflected energy from a target, and transponder mode, where an active on-board device is used for the tracking signal. Normally, the FPS-16 requires a crew of three to four technicians.

The basic FPS-16 pedestal, transmitter, and antenna feed is often used as a standard for comparing the performance of newer tracking systems. Radar engineers value the FPS-16 design, so many updates and improvements have been made over the years to keep it current. WSMR can tap into the work that other ranges have done to improve the FPS-16 through its participation in the Instrumentation Radar Support Program (IRSP). This program provides technical services, new designs, upgrades, and logistics support for instrumentation radars at 13 different test ranges throughout the world.

In the 1980's WSMR started a program to move most of our FPS-16 radars from their original fixed sites into a mobile configuration. This now allows most of the radars to be moved to various sites throughout the range and, when necessary throughout the world. Two radars with larger 3 Megawatt transmitters remain at fixed sites at Malone and

Stallion. One other FPS-16, located at Phillips Hill, retains its original fixed site configuration.

WSMR has improved its FPS-16 radar fleet as funds have been made available. The ADRS system is a proposed system to replace the aging FPS-16 radars with next generation instrumentation radar. The basic engineering integrity of the FPS-16 is such that one ADRS design proposes that new radars be built on an FPS-16 pedestal!

### **FPS-16 SYSTEM DESCRIPTION:**

The FPS-16 radars have been upgraded and improved over time such that each is one slightly different. The basic differences are transportable vs. fixed configuration, high power 3 Megawatt transmitter vs. a 1 Megawatt transmitter, and coherent vs. non-coherent.

Three of the FPS-16 radars are in fixed locations in buildings. These are R123 at Holloman AFB, R124 at Phillips Hill, and R127 at Stallion Range camp. Two of the fixed site radars, R123 and R127 also have high power 3MW transmitters. The other fixed site radar, R124, sits at an advantageous site atop Phillips Hill, where it has a view of the mid-range, Mockingbird Gap and up-range areas. Since there is always a need for a radar at this site, there has been no need to convert it to a transportable configuration.

Six of the FPS-16 radars have been converted to transportable configurations. The seventh, XN-1, was originally delivered by the factory as a transportable system. These systems consist of an electronics van, a pedestal/antenna trailer, and a bore sight tower for calibration. With the proper logistical planning, the systems can be broken down, moved and set up on a new site within a day or two. However, before it is put back onto operation, each subsystem must be checked for proper operation, the radar must be completely recalibrated, and it must pass a rigorous Real-Time Orbital Evaluation satellite track. This usually means the system will not be able to support range missions for a week to ten days.

The other major discriminating characteristic is the radar's coherency. Coherency refers to the ability to maintain the phase of an RF signal throughout the transmit and receive process. Coherency is vital to making phase measurements on the return signals. When observed over an FFT time window, such measurements form the basis of the post-flight Target Motion Resolution analysis. The two high powered radars at R123 and R127 have fully coherent capabilities. Additionally, WSMR has modified serial numbers 26, 33 and XN-1 with a slightly limited version called "coherent-on-receive."

The FPS-16 radars are single target tracking instruments. They place all of their resources onto a single object and close loop track that object in Range, Azimuth and Elevation. This data is sent to the Range Control Center at Building 335 in real-time and also recorded at the site for archiving purposes.

### **FPS-16 DATA PRODUCTS:**

**Real-Time TSPI data.** This is the primary data product of the FPS-16. It is transmitted at a rate of 20 samples per second to the Range Control Center (RCC) located in Building 335. The data consists of Range, Azimuth, Elevation and signal level measurements and an indication of the track mode associated with each track file. The range is transmitted with a granularity of one yard, its precision is generally between one and three yards, and

its absolute accuracy is better than 10 yards. The corresponding values for azimuth and elevation are 17 bits encoder granularity, .2 mils precision, and .2 mils absolute accuracy. Generally, the overall accuracy of the radar is such that any target on range can be tracked to within 75 feet of its absolute location.

**Post-Mission TSPI.** The same data that is transmitted to RCC in real-time is also recorded on site. Usually, the data is simply used for redundancy in case the real-time data transmission process malfunctions.

**Target Motion Resolution.** Target Motion Resolution is an extremely sophisticated set of software that provides measurements such as spin, detection of events, precise radial velocities, and detection of deployed targets. It is a post flight process that uses as its starting point the coherent information encoded as digitized in-phase and quadrature (I&Q) video. Two of the FPS-16 radars (R123, R127) are fully coherent, meaning that the phase relationship of the signal is maintained throughout the entire transmit/receive process. Three others have “coherent-on-receive” capability, which restricts the TMR data collection to the first unambiguous range interval. (Normally, the interval is set to 512kyds, so it’s not usually a significant limitation.)

**Signature Analysis.** Dynamic Radar Cross Section (RCS) analysis can be estimated in a post flight setting by utilizing calibrated measurements of the received signal from a tracked target. The process combines aspect angle data derived from the TSPI track with the calibrated signal level received at the radar at that particular aspect angle. This data is often useful in validating RSC turntable measurements and for estimating the level of debris after an intercept.

#### **CW WEIBEL DOPPLER RADAR:**

The Continuous Wave CW Doppler Radar is a special purpose radar designed to record the Doppler Signature of a target. It is used primarily for measuring the exit velocity of ground launched missiles and muzzle velocity of direct fire weapons.

The Radar is built by the Weibel Corp of Denmark. It is a highly portable radar. It can be moved to a new site, set-up, calibrated and ready for mission support within a few hours. It normally is operating by a two-person crew.

The Weibel is a Continuous Wave radar, so it constantly transmits and receives a signal simultaneously. When tracking a moving object, its receive frequency will be different than the transmit frequency due to Doppler shift. This signal is digitized and then processed in a post flight setting to derive information such as events, coning motions, (spin, nutation, coning angle) radial velocity, direct acceleration estimates, and debris cloud growth.

The Weibel radar was initially deployed to obtain velocity information on the MLRS rocket. However, it has proven to be an excellent system for gathering coherent data for use with the Target Motion Resolution (TMR) software analysis software. Thus, its use has expanded as its capabilities have been demonstrated at the range. Currently, three additional Weibel-like Doppler radars are planned for deployment in a fused Radar/Optics system that will take advantage of optics superior angle measurements and the CW radar’s range and Doppler capabilities.

### **CW WEIBEL DOPPLER SYSTEM DESCRIPTION:**

The Weibel CW Doppler radar consists of two antenna panels, a small pedestal with an elevation over azimuth servo system, a signal processor and a control computer. The antenna panels and pedestal are mounted on a small trailer and the computer and signal processor are normally placed in either a electronics van or within a missile block house. Cables between the antenna and signal processor allow the control of the radar to be offset by up to 100 feet from the pedestal. This allows the antenna to be set close to launched missiles or direct fire weapons while keeping the operators secure behind a bunker or within a blockhouse. The signal processor/computer can also be operated remotely through a data, so that the radar can operate in dangerous zones without any threat to its operators.

The radar operates by transmitting a continuous RF sine wave toward a target through one of the antenna panels. The other panel receives the signal and converts the X-band energy to a baseband in-phase and quadrature signal. This is sent to the signal processor where it is recorded for post flight analysis. A separate processor within the pedestal detects and processes a single moving object so that the antenna is continuously pointed toward it. The radar is capable of tracking a single target in angles and Doppler (radial velocity.) It also has a less capable method for tracking range.

The value of the CW Doppler radar is its capability of making Doppler measurements on all targets within its antenna illumination beam. Since it is not a pulsed system, the measurements are unambiguous. An analyst can view the entire Doppler spectrum without having to worry about a wrapped spectrum. This makes the CW Doppler radar particularly useful multiple targets such as submunitions, dispensed object, debris or any other situation where multiple targets are moving relative to one another.

The CW Doppler radar is a very portable system. It is not mobile (in the sense that it does not operate while moving) but it can be broke down, packed for transport moved to a new site, and be up and ready to support missions within a couple of hours.

### **CW WEIBEL DOPPLER DATA PRODUCTS:**

The primary data from the Weibel are the unambiguous radial velocity estimates on all detected targets within the illumination pattern of its antenna. The radar has some limited angle measurement capability can provide a range estimate to a single in limited situations.

The data normally starts in the form of digitized In-phase and Quadrature video samples. (I&Q data is equivalent to amplitude and phase measurements of the received signal.) These signals are windowed, weighted, and processed in an FFT to yield a Doppler spectrum. From the Doppler spectrum, the radial velocity of one or more targets can be detected and isolated and further processed to provide angel estimates and integrated range.

All of the sophisticated Target Motion Resolution software tools can be applied to the Doppler Spectrum, so spin, coning motion, detection of deployed objects and other advanced radar measurements can be extracted. The CW Doppler spectrum is unambiguous, so it is often possible to make measurements using this radar's data that are difficult or impossible to make using the ambiguous pulsed radar data.

The radar has a significant capability of processing its recorded data in a post flight setting right at the radar site. Since the Weibel is often set up close to launchers, the

preliminary results can be made available to on-site test conductors or weapons analysts right after a mission. However, the radar technicians are not signal processing experts and the radar software is not certified by the Data Sciences Directorate. Final certified data products are normally processed by Data Sciences in a post mission setting a day or two after the test.

## **T**RANSpondERS INSTRUMENTATION APPENDIX:

**RADAR TRANSPONDERS:** WSMR's qualification specifications for radar transponders are governed by the following standards:

- MIL-STD 461C, Electromagnetic Interface Characteristic, Requirement for Equipment.
- MIL-STD 462, Electromagnetic Interference, Characteristic Measurement of.
- MIL-STD 704D, Electric Power, Aircraft, Characteristic Utilization of.
- MIL-STD 810D, Environmental Test Methods.
- MIL-STD 45208A, Inspection System requirements.
- Local Acceptance Test Procedures. These procedures are less stringent tests that are used to evaluate workmanship and quality and consist of:
  - Sinusoidal Vibration: 15gs at 5 Hz to 2000 Hz and back to 5 Hz in the most critical axis determined at Qualification tests.
  - Temperature Tests: -35 °F to +167 °F.
  - Electrical Parameters: All.

### **CUSTOMER TRANSPONDERS:**

- Radar transponders provided by customers must be acceptance tested by the Range prior to use for Range safety data. Since environments are not identical for all test vehicles, test standards are defined on a case-by-case basis.
- For each transponder, the test vehicle environment and the hardware is required for Range testing. In some cases, instead of testing the hardware at the Range, Range personnel witnessing the tests at customer facilities may be sufficient.
- WSMR's flight certifications are valid for 90 days. In some cases, removal of the transponder for flight certification tests may not be feasible. In this case, open loop tests will be required after the 90 day period.
- Certification of a transponder by one test Range does not mean acceptance by all Ranges. Each Range has its own unique safety responsibilities which cannot be delegated.
- In addition, the transponder system (antenna, transponder, DC power and external to internal switching) must be pre-flight tested before each mission. The first test is immediately after installation and times coordinated between the range and the customer prior to mission.
- The following information is required for customer-supplied transponders:
  - Type of antennas
  - Number of antennas
  - Polarization of antennas
  - Location of antennas
  - Test data on antennas
  - Antenna patterns (vertical, horizontal and composite)
  - Antenna cabling lengths

- Insertion loss and VSWR measurements
- Type of power divider
- Environmental tests which must be performed on customer-provided transponders include:
  - High/low temperature and altitude
  - Humidity
  - Fungus
  - Salt fog
  - Sand dust
  - Sinusoidal vibration
  - Random vibration
  - Shock
  - Launch ejection shock
  - Pyrotechnic shock
  - Acceleration
  - Acoustic
  - Electromagnetic interference
  - Electromagnetic compatibility

## **GLOBAL POSITIONING SYSTEM INSTRUMENTATION APPENDIX:**

**ADVANCED RANGE DATA SYTEM (ARDS):** The ARDS system was developed by the Tri-Service Range Applications Joint Program Office (RAJPO) during the late 1980's and early 1990's. The ARDS is a Multi-player/Mobile system which uses remote GPS relay sites to extend the range coverage of the systems under test. The ARDS system architecture consists of three unique segments: The Datalink Ground System (DLGS) Control Segment, the Master/Remote Ground Station (MRGS) datalink relay Segment, and the Participant Instrumentation Segment.

The ARDS Participant Instrumentation comes in two configurations, the AIM-9 Pod Configuration (AN/ARQ - 52 (v) GPS Pod) and the Plate Configuration. The ARDS pods are primarily designed for aircraft instrumentation, mounted below the wings where the aircraft arsenal is normally carried. The AIM-9 Pod Configuration accommodates mounting on "fast movers" (F-14s, F-15s, F-16s, F-18s, GR1 Tornados, AV8Bs) and drone targets like QF-4s and F-4s. The Pod configuration also accommodates military helicopters (AH-1 Cobras and AH-64 Apaches). Plate Configurations support ground vehicles (tanks, humvees, etc.), helicopters, T-38's and are adaptable for other customized uses.

The main subsystems within the ARDS pods and plates are the on-board inertial measurement unit (IMU), a 10-channel P(Y)-code compatible GPS receiver, a Datalink Transceiver (DLT) L-Band radio, a flash card recorder, an Advanced Digital Interface Unit (ADIU) computer, and various power conditioning modules. Down linking of host vehicle 1553-type data is also possible using the optional Range Encryption Module (REM). The ARDS pods can be used in Real Time Casualty Assessment (RTCA) scenarios due to the fact that they can sense and record trigger pulls plus downlink weapon systems information from the host vehicle 1553 data bus.

Participant to Participant relaying capabilities allow the system to downlink or relay target information from those targets not within line-of-sight of a datalink relay station, thus enabling an extension of datalink coverage beyond that offered by the datalink relay stations alone. To date a single ARDS Control System has been used to successfully track up to 60 independent Participants as demonstrated during JCIET 2002.

The TSPI downlink and on-board recording data rate of the ARDS is variable at 0.1, 0.5, 1, 2, 5 and 10 Hz intervals. System accuracy is + 3 meter in x, y, and z (under dynamics) with less than 1 meter when static. The TSPI provided includes a Participant ID number along with navigation state data consisting of GPS time, position, velocity, acceleration, attitude, and attitude rates. The TSPI solution is based upon coupled GPS/IMU measurements using either precise encrypted P(Y)-code or coarse acquisition C/A code. The data output is in WGS-84, earth centered-earth fixed (ECEF) format.

**THE GPS SMALL BOX CONFIGURATION:** also known as the ARDS Lite, supports: ground vehicles (tanks, humvees, etc.) and most military helicopters (including HIP & HIND). The configuration is also an adaptable small package for drone, cruise missiles and drone targets like the MQM-107 and BQM-74. Like the ARDS, the ARDS Lite also provides TSPI, utilizing the coarse acquisition C/A code of the GPS; with accuracies identical to that of the ARDS.

## **T**IMING INSTRUMENTATION APPENDIX:

Timing accuracies have been established on WSMR for specific locations and applications. Customer equipment can be calibrated to within 25 micro-second accuracy referenced to UTS time using a WSMR transportable clock facility.

If the customer requires closer time correlation, terminal equipment is provided to move the time to within 10 microseconds. Customers requiring even closer correlation (sub-microsecond) or who are unable to receive VHF or land-line signals are provided radio receivers which use signals from the Global Positioning System (GPS) satellites to determine time information and produce timing signals. The accuracy associated with GPS timing is 250 nanoseconds. Timing support to off-Range instrumentation clusters, launch sites, etc., is furnished by mobile generation and distribution facilities that provide support with characteristics similar to the on-Range service.

The WSMR Timing System provides installation, calibration, maintenance, and repair services for the 1600 major items in the System (generation, distribution, and customer sites).

The Timing equipment at WSMR is controlled and maintained from within the GPS and Timing Branch. The Timing section maintains and operates the timing equipment at the Cox Range Control Center on almost every mission that takes place at the Range. Additionally, the Timing section is responsible for all timing equipment installation, calibration, set-up, and monitoring. The instrumentation systems that require timing support throughout the Range include the Instrumentation Radars, the Telemetry and the Optics Systems. Literally hundreds of individual timing systems are maintained. Below are four figures showing some of the individual pieces of equipment that are maintained and operated, along with some representative capabilities and features.

Along with this equipment, there are several fixed and mobile timing facilities which are manned and operated from various portions of the Range including:

- Uncle-2 Customer Service Center at
- WISE Site
- Uncle-3 Cox Range Control (CRCC)
- Uncle-6 Customer Service Center at Holloman
- Uncle-17 High Energy Laser Test Facility (HELSTF)
- Uncle-25 Customer Service Center at Stallion
- Uncle-51 Coma Site in the Stallion Area
- Uncle-52 Salinas Peak
- Uncle-37 Transmitter Van
- Uncle-39 Off-Range distribution
- Uncle-47 Distribution Van
- Uncle-49 Distribution Van
- Uncle-53 Distribution Van
- Uncle-60 Aircraft Sync Van

## OPTICAL INSTRUMENTATION APPENDIX:

WSMR has a full complement of optical instrumentation to meet your data collection requirements including about 90 high speed digital cameras used on many of the tracking systems.



**MULTIMODE AUTOMATIC TRACKING SYSTEM (MATS) AND VIDEO INSTRUMENT CONTROL SYSTEM (VICS):** The MATS is mobile optical tracking telescope systems based on a MATS are used primarily to collect high altitude trajectory and intercept data. The MATS can be operated in a manual or remote control mode. In a remote operation, MATS are controlled by the Video Instrument Control System. One VICS can control eight MATS. The VICS can provide a “quick look” data package within approximately one hour after completion of a mission.

**LAUNCH AREA THEODOLITE SYSTEM (LATS) AND REMOTE INSTRUMENT CONTROL SYSTEM (RICS):** The Launch Area Theodolite System is a mobile optical tracking telescope system similar to the MATS. The LATS are capable of tracking high dynamic targets at very close range to the target’s trajectory. The LATS are ideally suited for tracking missile launches and high velocity impacts on ground-based targets. LATS are remotely controlled by the Remote Instrument Control System. One RICS can control four MATS. The LATS and MATS mounts are equipped with digital, infrared, and standard video systems.

**VERSATILE TRACKING MOUNT (VTM):** The VTM is a mobile tracking telescope used to obtain altitude, event, and miss distance data in situations where the slant range is large and large images are required. Long focal length, configurations are used to record the data. The VTM can also provide real-time television images of the target.

**DISTANT OBJECT ATTITUDE MEASUREMENT SYSTEM (DOAMS):** The DOAMS is a high performance, dual focal length (100 inch and 200 inch), large aperture, tracking telescope that provides recordings at both focal lengths simultaneously. The DOAMS is used to obtain attitude, event, and miss distance data. The DOAMS is used for long ranges where high magnification and light gathering power are needed.



**FIXED CAMERA SYSTEM:** Fixed camera system high speed video cameras are transportable and can easily be relocated. The cameras do not track. They photograph the object as it passes through their field of view. These cameras provide altitude, event, position, velocity, and acceleration data for near-launch and other limited portions of flight trajectories. They are used at launch complexes, impact areas, and the Holloman Air Force Base High Speed Test Track. Camera inventory includes 6 high speed IR cameras capable of 120 frames per second (fps) at full resolution. Visible cameras are capable of 1000 or more frames per second with one reaching 4800 fps.

**NON-TRACK AND CLOSED CIRCUIT TELEVISION:** The Non-track and Closed Circuit TV (CCTV) systems are an amalgamation of HSDV cameras and support equipment; a wide range of analog video cameras, distribution amplifiers, switches, recorders, display monitors, annotators, and microwave radio communications systems for capturing, recording, distributing, and displaying surveillance and normal speed engineering sequential images; remote control systems for HSDV cameras; and several vans used to move, house, and control instrumentation. The Non-Track Digital Instrumentation System (NTDIS) van is the newest instrumentation van. The system has digital microwave radio and WSMR network connection capability. When surveyed and used in conjunction with surveyed target poles, the non-track cameras are called “fixed cameras” and are used to calculate precise trajectory information; when used simply to gather engineering data, they are called “event cameras”; and when used simply for surveillance, display, or distribution, these are called video stations. The inventory of Phantom digital cameras includes models v7.0 color, v7.1 color, v7.2 color, v7.3 b/w, v9 color and v10 color. Other digital cameras in the inventory are NAC color imagers, MemView B/W Imager and the Photron B/W Imager. The digital camera data is recorded on WSMR-developed High Speed Massive Memory recorders using a Camera Link interface. Other recording devices and interfaces are being evaluated for possible use. The inventory of non-track equipment also includes a Flight Follower. A Flight Follower is used to track high-velocity projectiles at launch. The Flight Follower consists of a mirror that rotates based on the flight profile, initial velocity, acceleration and stand-off distance. Most any imager can be placed in the Flight Follower housing to look at the mirror.

**MOBILE TELEVISION VANS (MTV):** Mobile Television Vans are used for temporary operations at remote locations. The vans are equipped with camera systems, microwave transmitters and receivers, and communications and switching equipment.

**AIDED LASER TRACKING SYSTEM (ALTS):** The Aided Laser Tracking System is a laser tracking system used to provide TSPI data on aircraft and missiles. The target must be augmented with laser-reflective material. This instrument is currently in mothball status.

**VIDEO RELAY CAPABILITY:** The Video Relay Facility (VRF) is located in the Main Post area inside the Cox Range Control Center. This facility can receive and transmit video signals to the south range launch areas and to Alamo Peak for relay to Holloman AFB and Stallion Range Center. The facility can also relay video signals to other sites for redistribution worldwide.

**BATTLESPACE REAL-TIME VIDEO (BRTV):** The Battlespace Real-time Video is a mobile tower system self supporting and Guy capable. The tower sections can be extended to a maximum of 89 feet with a maximum equipment payload of 500 lb's. The tower is equipped with camera systems, microwave transmitter and high dynamic tracker. The mobile tower trailer enclosure is equipped with network switching equipment, video streamers and digital recorders.



**MOBILE INFRARED TELESCOPE (MIRT):** The MIRT system consists of two large telescopes in a Gemini configuration; the top tube is a 5000 mm f/10 lens, while the bottom tube has been modified to an all-reflective gold-coated lens for use with science-grade cameras that operate from visible to the far infrared spectrum (0.4 – 14  $\mu\text{m}$ ). The main use of this system is to collect TSPI data, attitude (roll, pitch, and yaw) data, hit-point and aim-point data on air-air or ground-air intercepts, and other engineering sequential imagery in all conditions (day, night, haze, long distances, high altitudes) as well as to collect radiometric data in those conditions. The MIRT will be adapted for remote control by ORCA. The MIRT is the largest aperture mobile IR telescope in DoD inventory.

**OPTICS REMOTE CONTROL AND ACQUISITION (ORCA):** There are two Optics Remote Control and Acquisition (ORCA) vans. They are a 2<sup>nd</sup> generation, all-digital version of the VICS van. Each ORCA consists of a 6-station control system housed in a van body with dual pop-out sides, mounted on a van that pulls its own generator/UPS trailer. The tracking systems consist of a dual network, net-bootable suite of computers. The system has digital microwave radio and WSMR network connection capability. The communication between the ORCA and the tracking instrument is via Ethernet in contrast to the serial modem communication in the VICS. The Ethernet connectivity allows for total remote control of the tracking instrument computer, giving the ORCA much more control over the instruments than is possible with the VICS or RICS. The two ORCA vans are slated to replace the current VICS and a single RICS. The system is capable of receiving four (4) streams of video from each of the six (6) remote tracking systems and sending them via the WSMR network to customers off-range as well as on-range.



**VIRTUALLY INTEGRATED SYSTEM FOR OPTICAL REPLAY (VISOR):**



The VISOR is a truck-mounted van-body with a single pop-out side which pulls its own generator/UPS trailer. It was primarily intended to be used in conjunction with the ORCA and VICS, providing an alternate area for display and analysis, making more room for control functions in the other vans. VISOR can also be used as an interface to the WSMR network, using the installed digital microwaves. As in the ORCA, the


VISOR is a dual-network system with net-bootable diskless client computers. The van is set up so that an audience of approximately 10 people can watch video on 8 large, wall-mounted monitors. It has TSN and TSN-IP options, KG-175 and KG-175A (Gig E) encryption capability.

## METEOROLOGY INSTRUMENTATION APPENDIX:

**UPPER AIR MEASUREMENT SYSTEM (UAMS):** The eight upper air measurement systems are the backbone of the Meteorology Branch. The upper air systems are used to characterize the atmosphere by measuring the pressure, temperature, humidity, wind speed and direction at pre-determined layers in the atmosphere up to 100,000 feet above the surface. The wind speed and direction is determined by GPS navigation satellites or Loran-C networks. Upper atmospheric profiles are available in 500 to 1000 foot thick layers to the maximum 100,000 foot height.. Additional meteorological variables provided by the data are calculated: dew point, density, speed of sound, precipitable water, absolute humidity, IOR, and vapor pressure.

### **SURFACE AUTOMATED MEASUREMENT SYSTEM (SAMS):**

Surface conditions are monitored by the Surface Automated Measurement System that collects temperature, humidity, wind speed and direction, pressure, solar radiation and rainfall every 15 minutes. SAMS is an

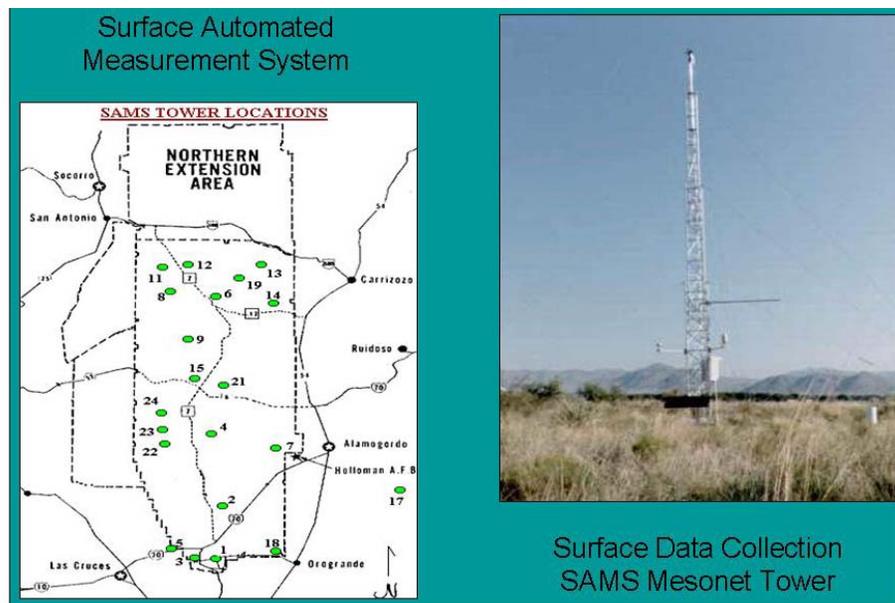


automated twenty four hour-seven day a week data collection platform. There are sixteen meteorological towers located at critical mission support sites throughout the range. The 10 meter towers are equipped with radios that transmit the processed data back to the SAMS base stations. The winds are measured at the 10 meter height and all other variables are collected at the 2 meter level. All data is collected in the data logger and pre-processed before transmission every 15 minutes to the base station. The raw data is stored in a database and is available for reports, displays, and atmospheric modeling.

**ATMOSPHERIC PROFILER MEASUREMENT SYSTEM (APMS):** The Atmospheric Profiler Measurement System consists of the radar wind profiler (RWP) technology, and is of notable value to severe weather forecasting, numerical modeling, and remote




operations. MET has four profilers networked that can be controlled remotely. These profilers provide continuous measurements of wind direction, wind speed, and temperature economically and automatically. The four profilers produce vertical profiles of the horizontal and vertical wind by measuring the radial velocity scatter as a function of range on five antenna beam positions. These profiles provide the meteorologist with a basic understanding of the wind and low level temperature regime overlying the test range. Profilers operate in the 924 MHz frequency range measuring winds and temperatures up to 15,000 feet AGL every 12-15 minutes. Wind speed and direction layers are available in 60, 100, 200, 300 meter range gates. The shortest successful wind consensus available is about 12 minutes. The system is transportable and commonly used in remote impact areas. The systems can run remotely 24 hours a day 7 days a week with repeat measurements available about every 15 minutes.

**FOUR DIMENSIONAL WEATHER MODELING (4DWX):** The 4-Dimensional Weather Modeling capability is state-of-the-art. The 4DWX system is powered by a Linux based 16 node computer cluster that runs a three domain, high resolution, nested grid meso-scale weather model centered over White Sands Missile Range. The weather model can be configured for any location globally via a Web interface and has been used extensively to support off range missions. The weather model output can be configured to run a full suite of meteorological parameters, and drive coupled applications and decision support systems via a Web based interface. Coupled applications include: sound propagation, plume dispersion and transport, ballistic wind effects, thunderstorm forecasting, and wind drift analysis. The model runs provide high resolution hourly output products during real-time mission support and pre and post mission analysis.

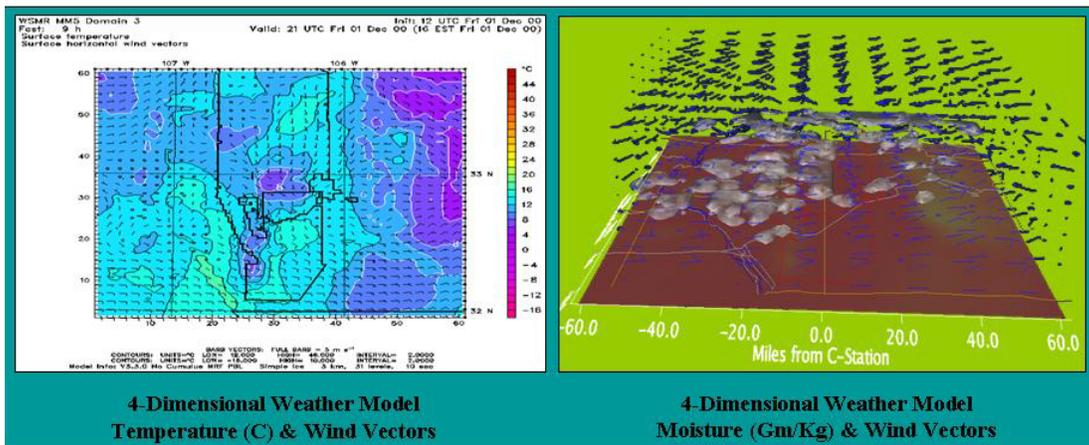

**LIGHTNING MAP ARRAY (LMA):** The Meteorological Group use the Lightning Map Array Thunderstorm Auto-Nowcaster, and Decision Aids to provide timely warnings, lightning watches, and advisories to protect personnel, instrumentation, and WSMR infrastructure. The LMA is a state of the art three-dimensional total lightning detection and mapping array that consists of 12 research-grade remote listening stations that are deployed systematically across the Range. Two-Dimensional coverage will extend out approximately 248 miles in diameter. The system is operated with 500-

microsecond time resolution for real-time applications with up to 2000 events per second. The mapping system is a ground based GPS time-of-arrival measurement for accurately locating, characterizing, and mapping the electrical discharge events. High-speed communications links are established at the existing fiber optic Test Support Network (TSN) hubs where the data is transmitted back to the workstation where real-time

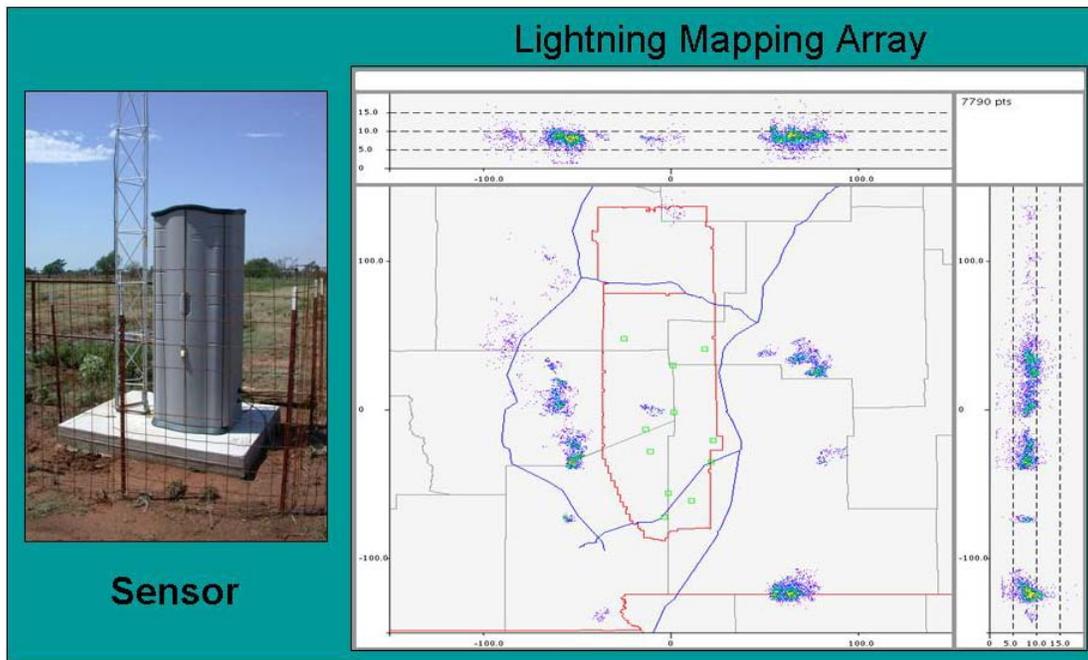


processing and display of electrical discharge activity (lightning) occurs. Information on electrical activity enables the duty meteorologist to conduct lightning advisories and issue lightning warnings to personnel engaged in hazardous operations. LMA complies with DOD 6055.9 Standard, DA/AR 385-64, AR 115-1 (Environmental), ATEC 385-1 (Weather Warning support), and WSMRR 385-18 (Safety - explosives).

**WINDFINDING RADAR (WFR):** The WF-100 Windfinding Radar system provides a quick upper atmospheric measuring system that continuously measures the wind direction, wind speed, and temperature. These meteorological variables provide the meteorologist a very basic understanding of the present state of the atmosphere overlying the test range. The Meteorology Branch operates two WF-100 Windfinding radars and are capable of measuring the upper level winds and temperatures to a maximum of 25 Kft AGL every 12-15 minutes (depending on atmospheric conditions). The Windfinding radars are on trailers and are transportable to remote sites on the range. Currently, the WF100 is primarily used to support the MLRS and the GMLRS firings. It is also used for quick look wind data predictions for Patriot Chaff missions to avoid chaff drifting into the ARTCC at El Paso and Albuquerque International Airports. It is also used for the unguided NASA Research Rockets.

**SMART IMPACT PREDICTION SYSTEM (SMART-IP):** The SMART-IP system is a self contained, highly portable, COTS based, rocket impact prediction system that is locally developed and maintained. The system utilizes several networked computers with a data pull design. The system is based on a GEM 6-DOF rocket simulation model that

also utilizes the Lewis ballistic methodology to generate launcher settings and IIP tracks. The system ingests up to two upper air data streams in real-time, using Vaisala GPS

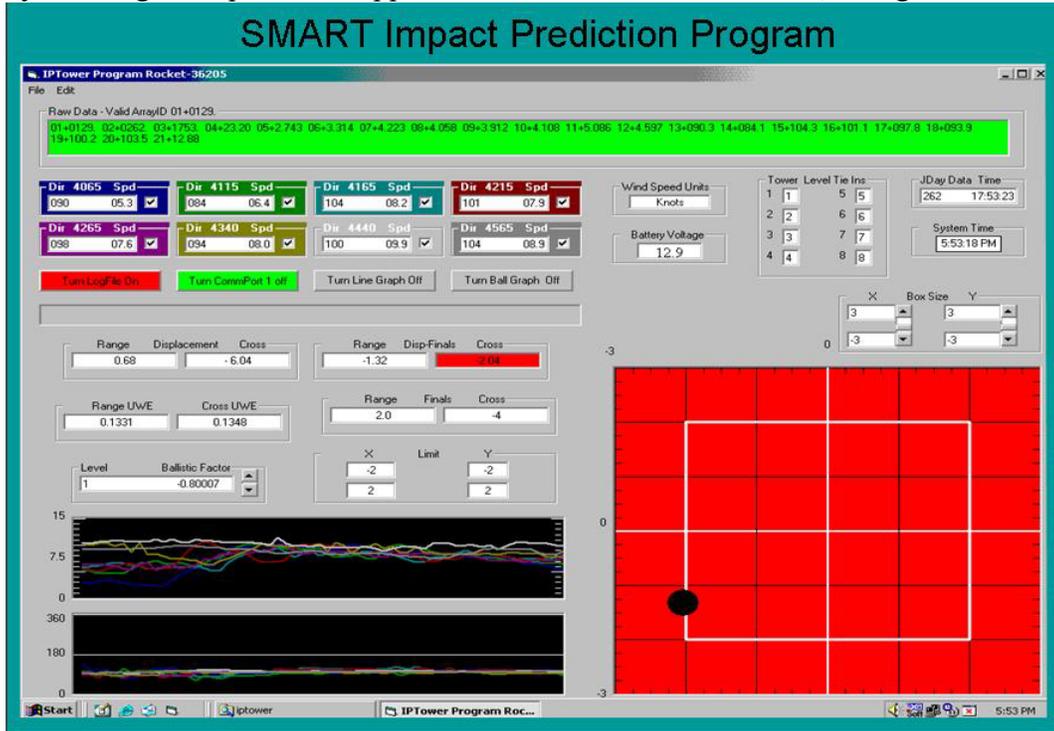

based rawinsondes and or WF-100 wind tracking radar. Tower data is also ingested and can be displayed in multiple locations. The tower display is complete with a Go-No-Go decision support system designed to minimize wind error in a variety of weather conditions to enable the rockets launched to land within a 1 sigma dispersion impact.

**DATA PRODUCTS:**

**SURFACE AUTOMATED MEASUREMENT SYSTEM SAMS PRODUCTS:**

- Daily Report - 15 minute one station (Data Collection Point - DCP)
- Daily Report - Hourly all stations.
- Monthly Report - one station.
- Monthly Report - all stations.
- Climatology Report – annual

**ATMOSPHERIC PROFILER MEASUREMENT SYSTEM PRODUCTS:**

- Wind Speed and Direction Profiles:
  - 60, 100, 200 and 400 meter vertical resolution.
  - 90 meter to 5000 meter height above ground level.
  - 6 minute to 30 minute temporal resolution.
  - Continuous measurements within the area of interest via remote operation.
- Temperature:

- 60, 100, 200 and 400 meter vertical resolution
- 90 meter to 1500 meter height above ground level
- 60 minute to 30 minute temporal resolution.
- Continuous measurements within the area of interest via remote operation.

Note: The data listed above is presented in a formal report form within two hours of the completed mission. Near real time measurements are available to the customer at the test control center if required.

#### **LIGHTNING MAPPING ARRAY (LMA) PRODUCTS:**

- Lightning Meteorological Watches
- Lightning Plot Images (.PNG) for Point and Density Data available Post Mission for Analysis.

#### **FOUR DIMENSIONAL WEATHER MODELING (4DWX) PRODUCTS:**

- RT-FDDA Mesoscale Weather Model in MEDOC file format.
- Numerical Weather Forecast Data in Excel Format.
- SAMS surface weather data.
- Specialized Mission Weather Forecast.
- T-1 Day Weather Briefing.
- Auto\_Nowcaster - Composite Radar Images available Post Mission for Analysis.
- Weather Satellite Images (Visible and IR) available Post Mission for Analysis.
- Parachute Drift using forecast winds or measured winds.
- Chaff Drift using forecast winds or measured winds.
- Balloon Drift using forecast winds or measured winds.
- Smart-IP Trajectory files for rocket sustainer and booster using forecast winds.

#### **STREAMLINED METEOROLOGY AND REAL-TIME IMPACT PREDICTION PRODUCTS:**

- Lewis Trajectory File with rocket displacements by wind layer, launcher settings, and predicted Impact for Sustainer.
- Lewis Booster Trajectory File with booster displacements by wind layer, and booster impact.
- GEM 6-DOF Rocket Simulation IIP track in WSMR Flight Safety Format.
- Rocket Impact Form
- Launcher Tower Wind Display
- T-0 Screen Shot of Launcher Tower Wind Display
- ASCII output of Launcher Tower Winds.
- Final Rocket Report.

# DATA DISTRIBUTION SYSTEMS APPENDIX:

## INTER-RANGE CONTROL CENTER (IRCC):

**DISTRIBUTED TEST SUPPORT:** The IRCC is composed of two areas totaling about 4,000 square feet in area. The facility features a control area that is used for test conduct. A second area accommodates red/blue cell forces. The IRCC was designed to be rapidly configured to support a variety of secure and unclassified missions. The control area features 50 workstations that use keyboard, video and mouse switches to allow users to access any of the nearly 100 computers housed in a secure area out of sight of the operators.

In addition to test control, IRCC also provides a secure data management and storage capability and has been used to host post-test data analysis working groups. The facility also features a secure video teleconferencing area.

**WHITE SANDS MISSILE RANGE**  
**Implementing Net Ready Test Capabilities**

**Instrumentation Ready**

Joint Tactical Network Test Environment  
Network Instrumentation  
GIG  
SATCOM  
Fiber  
Tactical  
RF  
Threat Presentation  
EW Attacks  
Jamming/Denial  
Information Assurance

**Interoperability Ready**

InterTEC

Network KPP As System Performance  
We need your help to get here

**Connectivity Ready**

ATEC OREN SITES

IPV6 Ready  
Joint Connectivity  
Accredited Networks  
Information Assurance Expertise

**Mission Ready**

Distributed testing requires collaboration, coordination and leadership. At the heart of IRCC operations is a core team of 40 government and contract personnel augmented by engineering professionals from throughout ATEC. The IRCC team has the necessary experience to facilitate that collaboration and coordination to ensure that defined processes are utilized and followed, to integrate synthetic environments, and to provide

test and configuration management of systems, software and simulations. The team also provides accreditation services for the networks needed to support distributed testing. The IRCC team helps to build and refine the processes and procedures to support future network-centric, distributed test requirements. Projects include network environment characterization, establishment of configuration control management procedures, and the establishment of interface connection working groups at each of ATEC's test facilities to find unique, permanent external connectivity solutions.

**COMMON CONTROL NODE:** Other projects include construction of a Common Control Node facility at WSMR to support FCS testing and project engineering for the ATEC Test Integration Network, a dedicated network that will make ATEC assets available for FCS test support. The IRCC also is involved in an aggressive effort to explore partnering opportunities with non-ATEC and joint activities to provide top-quality test support for all ATEC customers.

## **T**EST SUPPORT NETWORK – INTERNET PROTOCOL (TSN-IP):

**TRANSPORT:** The network transport is to be a black-to-black interconnection to the edge networks (i.e., classified and unclassified user networks). Black traffic is defined as traffic that has been encrypted at the Internet Protocol (IP) layer and a black network is one in which all user data, both classified and unclassified, is encrypted at the IP layer. High Assurance Internet Protocol Encryptor (HAIPE) devices will encrypt classified traffic. The most important elements of the transport segment functions are as follows:

### **LOCAL CAPABILITY REQUIREMENTS:**

- Provide connectivity points to 255 Fiber Site Terminating Equipment (FSTE) on the range at a higher priority than providing the increased bandwidth.
- Ensure any investment is re-useable and satisfies the desired GIG end objectives.
- Provide 10Gbps bandwidth core switching and transport.
- Provide network bandwidth of up to 1Gbps to the customer edge on demand with minimal or no additional network reconfiguration.
- Provide current users networks with a shared interim 1 Gig bandwidth.
- Consider additional ATIN and FCS funds in the final build-out of the networks.
- Provide a range-wide IPv4 and IPv6 compatible network with IP multicasting capabilities.
- Provide for expansion of bandwidth beyond 10Gbps with Wavelength Division Multiplexing.

### **QUALITY OF SERVICE:**

- Support the establishment of Performance Service Level Agreements (SLAs) to provide the quality of service necessary to meet or exceed requirements of network applications for the transport of voice, data, video, imagery, and other multi-media demands (CJCSI 6215.02A).
- Support precedence and preemption supporting C2 communications, as defined in CJCSI 6215.02.

### **ROUTING:**

- Support inter-domain routing to provide Edge-network-to-Edge-network connectivity.
- Protect routing and reach-ability information using encrypted router-to-router connections.
- Provide support for Virtual Private Network (VPN) service across Tier 1 networks for Tier 2 and Tier 3 networks. (Tier 1 is backbone core, Tier 2 is distribution, and Tier 3 is the access layer model distribution configuration).

### **NETWORK MANAGEMENT AND CONTROL:**

- Transport segment shall protect aggregated management information at a maximum of Top Secret.
- Transport segment shall provide Network Management systems Attack, Sense, Warning, and Response (ASWR) sensor information to support the NetOps CONOPS.
- Transport shall provide manager-to-manager interface standards based on a common bus concept.

### **INFORMATION ASSURANCE:**

- Transport shall support Quality-of-Protection capabilities that ensure information is routed and protected based on its value.
- Transport shall protect control and manage plane information at the Sensitive level as defined in DoDI 8500.2.

**WSMR SENSOR INSTRUMENTATION:** Enable WSMR to integrate and interoperate range fixed and mobile instrumentation support systems. The range instrumentation consists primarily of radar, telemetry, optics instrumentation Time and Space Position Information (TSPI) sensors, and processing and archival centers. The required capabilities are as follows:

- Integrate approximately 122 fixed and mobile range sensor systems to the TSN-IP network.
- Provide network encryption equipment/network switches to support red/black operational requirements
- Provide Plug and Play connectivity to Mobile Sensor Systems. Mobile sensor must have the ability to disconnect from one FSTE, relocate to another site on the range, and reconnect at another FSTE without requiring any reconfiguration of the TSN-IP transport network or their internal LAN. This capability is necessary to reduce time and manpower that is currently required to relocate a mobile system.
- Provide Gigabit Interface connectivity.
- Provide user training on encryption devices to range support personnel.
- Provide user training on edge network devices (router and IP services) to range support personnel.
- Provision range users with TDM edge network support via the DS-0, T1, T3 and DSL as necessary.

- Assume the demarcation point for the user interface DITSCAP/DIACAP is before the network stack in the sensor.
- Provide tactical fiber cable to interface the mobile units to the FSTE's.

The following table contains the objectives and thresholds that are required to satisfy the general capabilities described in this section:

**TABLE 1. GENERAL CAPABILITIES REQUIRED**

Parameters	Objective	Threshold
TSN IP Core Transport Network Bandwidth	10Gbps	1Gbps
Campus Network Latency	10 ms	100ms
FSTE edge-to-edge Bandwidth	1Gbps	400Mbps
Transition Range Sensor Systems to TSN-IP	122 Sensors	92 Sensors
Radar Sensor System Interface	Encrypted data Transmission	Unencrypted data Transmission
Optics Sensor System Interface	Encrypted data Transmission	Unencrypted data Transmission
Telemetry	Encrypted data Transmission	Unencrypted data Transmission
Real Time Processing	Encrypted data Transmission	Unencrypted data Transmission
Network Availability	99.999	99.999

**TECHNICAL CAPABILITIES:**

**KEY PERFORMANCE PARAMETERS (KPPS):** The following KPPs represent the critical performance parameters that demonstrate the enhanced value of the TSN-IP services and provide an objective measure of immediate return on investment derived from the initial operational capability. During the iterative process that accompanies the evolutionary development of this technology, WSMR, PEO STRI, and DoD stakeholders will continue to provide significant input and support to derive more finite values that will support or evolve these KPPs.

The Net-Ready Key Performance Parameter (NR-KPP) is required by CJCSI 6212.01D. An NR-KPP, consisting of verifiable performance measures and metrics, shall be used to assess information needs, information timeliness (Periodicity, Availability, Timeliness, Throughput), information assurance (Accuracy, Availability, Information Criticality, Integrity), and net-ready attributes required for both the technical exchange of information and the end-to-end operational effectiveness of that exchange. The four NR-KPP elements include:

- Compliance with the Net-Centric Operations and Warfare Reference Model (NCOW RM),
- Supporting integrated architecture products required to assess information exchange and use for a given capability,
- Compliance with applicable Global Information Grid (GIG) Key Interface Profiles (KIPs), and
- Verification of compliance with DOD information assurance requirements.

Coordination with the Joint Interoperability Test Command (JITC) shall be conducted in order to ensure that the system meets the joint interoperability requirements of its users. The following table contains the NR-KPP statement.

**TABLE 2: NR-KPP STATEMENT**

<b>KPP</b>	<b>Threshold (T)</b>	<b>Objective (O)</b>
<p><b>Net-Ready:</b> The system must support Net-Centric military operations. The system must be able to enter and be managed in the network, and exchange data in a secure manner to enhance mission effectiveness. The system must continuously provide survivable interoperable, secure and operationally effective information exchanges to enable a Net-Centric military capability.</p>	<p>The system must fully support execution of joint critical operational activities identified in the applicable joint and system integrated architectures and the system must satisfy the technical requirements for transition to Net-Centric military operations to include</p> <ol style="list-style-type: none"> <li>1) DISR mandated GIG IT standards and profiles identified in the TV-1,</li> <li>2) DISR mandated GIG KIPs identified in the KIP declaration table,</li> <li>3) NCOW RM Enterprise Services</li> <li>4) Information assurance requirements including availability, integrity, authentication, confidentiality, and non-repudiation, and issuance of an Interim Approval to Operate (IATO) by the Designated Approval Authority (DAA), and</li> <li>5) Operationally effective information exchanges; and mission critical performance and information assurance attributes, data correctness, data availability, and consistent data processing specified in the applicable Joint and system integrated architecture views.</li> </ol>	<p>The system must fully support execution of all operational activities identified in the applicable joint integrated architectures, the system must satisfy the technical requirements for Net-Centric military operations to include</p> <ol style="list-style-type: none"> <li>1) DISR mandated GIG IT standards and profiles identified in the TV-1,</li> <li>2) DISR mandated GIG KIPs identified in the KIP declaration table,</li> <li>3) NCOW RM Enterprise Services</li> <li>4) Information assurance requirements including availability, integrity, authentication, confidentiality, and non-repudiation, and issuance of an Approval to Operate (ATO) by the Designated Approval Authority (DAA), and</li> <li>5) Operationally effective information exchanges; and mission critical performance and information assurance attributes, data correctness, data availability, and consistent data processing specified in the applicable Joint and system integrated architecture views.</li> </ol>

As stated in the table above, the system must support Net-Centric military operations. Examples of this are as follows:

- Real-time Distributed Combined Arms/Joint Forces Exercised (Virtual, Constructive and Live).
- Future Combat System net-centric Development Test and Evaluation.
- “Immediate Action Required” testing in support of War Zone conduct of combat issues.

White Sands has adopted the following performance metrics for the TSN-IP network based on the parameters presented in Table 3.

**Network Bandwidth Utilization**

- For TCP the utilization rate shall not exceed 70% of available bandwidth
- For UDP the utilization rate shall not exceed 50% of available bandwidth

**Oversubscription Rates:**

- Best Practice less than 10 to 1
- UDP low latency requires less oversubscription
- Architecture goal less than 5 to 1

**TABLE 3: PERFORMANCE SERVICE LEVEL AGREEMENTS (SLA’S)**

IP CLASS OF SERVICE	ONE-WAY DELAY <sup>(1)</sup>	THROUGHPUT	JITTER <sup>(2)</sup>	QoS BANDWIDTH PER AAPP
Priority Voice Traffic	< 80 ms	Packet loss <sup>(3)</sup> < 5% less	< 35 ms	Max 75%
Real-Time Traffic – Video	< 80 ms	Packet loss < 3%		60%

Priority Data Traffic	< 100 ms	Packet loss < 2%		30%
Best Effort Traffic	No target	No target	No target	10%

- (1) Delay: telephony, multi-media conferencing, streaming media.
- (2) Jitter: telephony and multi-media conferencing
- (3) Packet Loss: telephony, multi-media conferencing, streaming media, low latency data

**MISSION SUPPORT DATA:** The acquisition, protection, transportation, processing, archiving, and displaying of Mission Data are the critical factors in the WSMR business model. Table 4 summarizes the data flow capabilities required for WSMR to conduct business before, during and after mission execution and their associated Quality of Service requirements.

**TABLE 4: QoS DATA FLOW SUMMARY AT DIFFERENT PHASES OF SUPPORT**

Customer Application	Source	Destination	Network Protocol(s)	Maximum Bandwidth Requirement	QoS Priority Requirements
<b>Pre-mission</b>					
Telemetry / MT	MT VAN	WSMR Client anywhere on the Range	UDP/IP	20 Mbps	5
Pre-Mission Video /MT	MT VAN	WSMR Client anywhere on the Range	UDP/IP	4 Mbps	5
<b>During Mission</b>					
RTDPS Display / RTDPS	RTDPS	MT VAN to Launch Complex	UDP/IP	100 Mbps	7
Telemetry Display TDC	TDC	MT VAN to Launch Complex	UDP/IP	1Gbps	7
Mission Video (low-speed and high-speed) / Optics	VRF	MT VAN to Launch Complex	UDP/IP	192 Mbps	7
Radar Data / Radar	Radar Instruments along the Range	RTDPS – CRCC	UDP/IP	400 Mbps	7
GPS Data / GPS	GPS Transmitter on the Test Vehicle	RTDPS – CRCC	UDP/IP	12.352 Mbps	7
Telemetry Data / Field Telemetry	Telemetry Instruments along the Range	TDC – CRCC	UDP/IP	5.8 Gbps to 9 Gbps	7
Pointing Data / RTDPS	IOSP Server	Radar Instruments along the Range	UDP/IP	3.1 Mbps	7

Customer Application	Source	Destination	Network Protocol(s)	Maximum Bandwidth Requirement	QoS Priority Requirements
<b>Post-Mission</b>					
Mission Video (high-speed) / Optics	Optics Instruments along the Range	Data Reduction	UDP/IP	10 Gbps	5
Copies of Data and reports / Data Reduction	Data Reduction Servers	WSMR Client	UDP/IP	1 Gbps	5

**TABLE 5: QoS PRIORITY LEVEL DEFINITIONS**  
(Defines the QoS levels that were used in Table 4)

Priority Level	Traffic Type
0	Best Effort
1	Background
2	Standard (Spare)
3	Excellent Load (Business Critical)
4	Controlled Load (Streaming Multimedia)
5	Video (Interactive Media) [Less than 100ms latency and jitter]
6	Voice (Interactive Voice) [Less than 10ms latency and jitter]
7	Network Control Reserved Traffic [Lowest latency and jitter]

## **DATA ANALYSIS SYSTEMS APPENDIX:**

### **RELIABILITY, AVAILABILITY AND MAINTAINABILITY (RAM):**

**RAM SUPPORT:** In general RAM analysis assesses whether mission equipment is in an operable and committable state at a mission's onset or upon demand. Depending on the program and customer requirements, a variety of reports may be produced including:

- Writing Test Incident Reports
- Capturing Operational Timelines
- Capturing Maintenance Timelines
- Providing RAM Data Collection support
- Developing RAM Databases
- Writing and developing test plans
- Performing RAM data analysis
- Performing a written evaluation of tests conducted

**RAM INTEGRATED LOGISTICS SUPPORT (ILS) SUPPORT:** Testing includes assessment of the effectiveness of:

- Tools and test equipment
- Publications
- Repair parts
- Storage compartments and components
- Design for maintainability

**SANDS TECHNICAL DATA CENTER (STDC):** The local network is housed within a secure facility operating at the SECRET level; however, the network has been extended across the country through the use of NSA approved encryption devices. These devices allow for the use of leased lines when bandwidth and transmission speed are an issue, and can simply and cheaply transmit over the DREN in other cases. Analysts, programmers, and engineers use this facility to create a range of tools which are then used in the data reduction and analysis process leading to quick look, interim, and final data products and reports. These include radar and optics-based time, space, position information; miss distance reports; videotapes; and specially tailored data products such as: listings, plots, and magnetic tapes.

**MANPOWER AND PERSONNEL INTEGRATION (MANPRINT):** The test activities of the MANPRINT Branch include:

- Preparing test plans
- Conducting the tests
- Assessing and analyzing the data
- Preparing the test reports
- Presenting briefings of the test results.

**HUMAN FACTORS ENGINEERING (HFE):** HFE evaluations performed on weapon systems include:

- Lighting measurement
- Steady state noise measurement
- Impulse noise measurement
- Temperature, humidity, and ventilation measurement
  - Visibility and field of view measurement
  - Speech Intelligibility measurement of communications systems
  - Workspace and anthropometrics measurement
  - Displays and controls evaluation
  - Force, torque, and weight measurements
  - Evaluation of labels, markings, and technical manuals
  - Man-computer interface assessment
  - Assessment of New Equipment Training adequacy
  - Administering of interviews and questionnaires

A variety of instrumentation is available for gathering of human factors engineering data and WSMR personnel are well versed in the use of this instrumentation. These instrumentation items include sound level meters, illumination meters, anemometers, Wet Bulb Globe Temperature devices, force and torque testers, anthropometric measurement devices, stopwatches, cameras, and videotape recorders. The MANPRINT group also has experience and expertise in preparing and administering interview guides and questionnaires. Another area of expertise of the MANPRINT group is the design of experiments and the statistical analysis of experimental data.

**SYSTEM SAFETY EVALUATIONS:** In preparing a safety release recommendation, personnel from the MANPRINT group review various safety documents regarding the weapon system under test and perform safety inspections of the weapon system. The safety inspection addresses such areas as electrical hazards, mechanical hazards, fire and explosive hazards, mobility hazards, lifting hazards, and conformance to MIL-STD-882, *System Safety Program Requirements*, and MIL-STD-454, *Standard General Requirements for Electrical Equipment*. The system safety inspections are conducted in accordance with Army approved TOPs, such as TOP 10-2-508, *Safety and Health Hazard Evaluation—General Equipment*. The MANPRINT group performs the following:

- Provides many safety confirmation recommendations. A safety confirmation recommendation is a document provided to DTC in support of DTC issuing a safety confirmation, which is a certification required for the materiel release and fielding of a weapon system.
- Conducts and prepares reports on system safety tests as part of a weapon system technical test or operational test. The activities involved in providing a safety confirmation recommendation or in conducting a system safety test during a technical or operational test are similar to the activities involved in providing a safety release recommendation, as described above.
- Performs evaluations of health hazards arising from noise levels, heat stress and toxic substance levels.
- Devises the test plan, gathering noise level data, and analyzing the data with respect to the limits specified in MIL-STD-1474, *Noise Limits for Army Personnel*.

- Gathers Wet Bulb Globe Temperature data and compare the results to the limits described in Medical Technical Bulletin 507 (TB Med 507), Prevention, Treatment, and Control of Heat Injury.
- Devises the test plan and comparing the measured toxic substance levels to the limits specified by OSHA, but the actual measurements of the toxic substances are performed by the Materiel Test Directorate (MTD) Chemistry Laboratory.

**SOFTWARE TEST AND ANALYSIS: SOFTWARE TEST AND ANALYSIS:** The requirements-oriented software assessment methodology that is utilized to accomplish software test and evaluation is documented in DTC TOP 1-1-056. It is targeted at the system performance level. The approach is focused on the software requirements and is deliberately not focused towards a further debugging of the contractor's computer code. Key elements of this approach consider allocation of system requirements to software, assessment of software performance, and assessment of the impact of software performance on overall system performance. In order to assure that these assessments are based on comprehensive testing of all software requirements, an extent of test metric is utilized to measure completeness of testing.

Application of this procedure provides pre-test assessment of projected test coverage. This assessment supports pre-test planning to assure a comprehensive test design. Post-test assessment provides actual test coverage achieved. In addition to being a metric itself, extent of test is also a key element in the system assessment in that it provides a confidence indicator for the overall performance achieved. The overall extent of test, software change history, software maturity, and performance assessment provide data to assess the impact of software on system performance. Results of test analyses are used to prepare test-by-test reports, software problem reports, test incident reports, and overall performance assessment reports. The activities to accomplish software test and evaluation include the following:

- |                                      |   |
|--------------------------------------|---|
| ● Documentation Analysis             | ● Development of System/<br>Software Test Scenarios                 |
| ● Requirements Identification        | ● Identification of Data Collection/<br>Data Reduction Requirements |
| ● Requirements Traceability Analysis | ● Test Monitoring and Analysis                                      |
| ● Test Condition Development         | ● Test Analysis   |
| ● Development of Analysis Plans      | ● Test Reporting  |
| ● Test Coverage Mapping              |   |

MTD is the lead agency in the Developmental Test Command (DTC) for developing the Test Operations Procedure (TOP), Software Performance Testing, TOP 1-1-056, and the International TOP (ITOP), Safety Critical Software Testing, ITOP 1-1-057. The branch also participates in the Software Test and Evaluation Panel (STEP) in the development of the Army's software T&E metrics. The requirements-oriented test methodology documented in DTC TOP 1-1-056 and ITOP 1-1-057 are utilized to accomplish:

- Software Test And Analysis
- Software Independent Verification and Validation (IV&V)
- Software Safety
- Software Evaluation System (AFATDS)
- Future Combat Systems (FCS)
- Non Line of Site – Launch System (NLOS-LS) and Precision Attack Missile (PAM)

## SYSTEM ENGINEERING:

### ● PRETEST PLANNING:

- Requirements Analysis - determine if Requirements are testable, uniform, clear, etc; develop measures of performance
- Analytical Methodology - develop technique for computing measures that address Requirements
- Data Reduction - develop a process to handling system and range “truth” data; to merge data sets; to compute measures
- Data Presentation - develop methods to portray measures of performance
- Test Assessment - generate criteria for deciding successful tests
- Test Plan - prepare plan delineating the “who/what/where/when” of items to be tested; indicate which Requirements are specifically applicable to the given test

These functions generally occur on the order of months to years before given test event, depending on the complexity of the systems under test, and the scope of the test program.

### ● DAY-OF-TEST TEST ASSESSMENT:

Do not confuse *Test Assessment* with *System Performance* assessment; as often happens.

- How do you declare a test a success or not?
- How do you decide to redo a test?
- What constitutes acceptable data collection?

Answers to these questions generated during the pretest planning phase are found by analyzing the results of Test Monitoring. This function is vital to indicating how far from the test plan the actual events deviated. This is different than determining the performance of the system under test itself.

Also during the Day-of-Test, data must be collected from various system segments, range data producers; then centralized, cataloged and distributed to authorized participants.

- **SYSTEM PERFORMANCE ASSESSMENT (POST-TEST ANALYSIS):** The analytical methodology developed during the pretest planning phase is implemented, with allowances made for data incongruities and test plan deviations, producing data presentations. The test reporting method is carried out per customer guidance or DoD mandate. During this challenging phase, the difference between planned (simulated) system performance vs. actual performance must be explained. Moreover, the significance of the deviations must be weighed.

**SOFTWARE ENGINEERING:** A special staff of engineers, mathematicians, operations research analysts, and physicists are available and have an average of 25 man-years experience in weapon systems T&E. They are highly skilled in the application of the methodology and analytical techniques used for the assessment of software embedded in weapon systems. An increase in level of effort to support specialty skills and support requirement surges through its engineering and analysis contractor can be made. The

Software Engineering group has supported the evaluation of software intensive systems to include:

- Theater High Altitude Area Defense (THAAD)
- National Missile Defense-Ground Based Radar-Prototype (NMD-GBR-P)
- Patriot
- Joint Tactical Ground Station (JTAGS)
- Multiple Launch Rocket System (MLRS)
- Army Tactical Missile System (ATACMS)
- Improved Mortar Ballistic Computer (IMBC)
- Army Field Artillery Tactical Data System (AFATDS)
- Future Combat Systems (FCS)
- Non Line of Site – Launch System (NLOS-LS) and Precision Attack Missile (PAM)

**HAZARDOUS TEST AREA (HTA):** The Warheads Test Branch operates and maintains the Hazardous Test Area (HTA) and maintains operational control of ten impact areas and special purpose areas located throughout WSMR. The HTA serves to conduct destructive and operational tests of explosive items to evaluate their safety and operational integrity. Tests are conducted to meet requirements from MIL-STD-2105 and Test Operational Procedures (TOPs) dealing with explosive devices. The HTA is located approximately 10 miles from the WSMR main post and is nestled in a remote valley surrounded by the San Augustine Mountains. The HTA consists of several distinct test areas listed below.

- Centrifuge building - This building contains two specially designed centrifuges for conducting flight certification of Safe and Arm devices. This building also contains an area for special testing such as warhead explosive remote steam-out, warhead remote cutting/drilling/coring, and assembly/disassembly operations of certain types of warheads, fuzes, and rocket motors.
- Thrust stands - Two thrust stands are available for the conduct of static testing of rocket motors and for conflagration, bullet impact, and slow cook off testing of rocket motors, warheads, and other explosive devices
- Arena test areas - Two instrumented areas are available for the purpose of conducting warhead detonation testing in which fragment dispersion, and blast overpressure data is obtained.
- Drop tower - A 40 ft drop tower is available for the purpose of drop testing warheads, rocket motors, missiles, and other explosive devices.
- Conflagration pit - This 150 ft long by 95 ft wide by 20 ft deep pit is used for the conduct of large scale conflagration testing as well as other destructive and/or functional testing of warheads.

**IMPACT AREAS:** The ten impact areas operationally controlled and maintained by the branch can be used for air to surface or surface-to-surface flight test missions. The impact areas are circular, range in diameter size from 4,200 feet to 10,000 feet, and are grouped in the two following categories:

- **LIVE PAYLOAD (PHASE-II) IMPACT AREAS (RHODES, DENVER, AND STALLION WIT):** These impact areas are designated as Warhead Impact Target (WIT) areas and are used for testing fully tactical high explosive warheads and for dispensing of tactical configuration submunitions where the live fuzing system will detonate the high explosive charge as intended in the tactical design. Only visual analysis is allowed in these areas and recovery of these submunitions is not allowed with dud submunitions destroyed in place. Remote controlled operations to included recovery, inspections, and failure analysis of failed conventional and smart submunitions can be performed under special circumstances utilizing the Warheads Test Branch remote controlled capabilities and equipment.
  
- **PHASE I (PHASE-I) IMPACT AREAS (G-10, G-16, G-20, G-25, ABC-1, PUP, 649) :**
  - These impact areas are used exclusively to test inert warheads which do not contain high explosive charge and are used for dispensing of inert submunitions with only live detonators in the fuzing system. The Warheads Test Branch is also responsible for keeping these areas free of vegetation; therefore enhancing safety to impact area personnel and their ability to conduct the recovery and data collection operations.
  - The impact areas are grouped to ensure the safety of personnel who must enter the impact areas to collect data and to enhance the diagnostic effort utilized to analyze the functional aspects of submunitions. There are seven Phase-I and three Phase-II impact areas located throughout WSMR.
  - It should be noted that mixing of live and inert submunition payloads is not allowed. Only inert submunitions are fired into Phase-I impact areas, and only live submunitions are fired into Phase-II impact areas. Special consideration is provided to flight testing of missiles containing the high explosive (HE) unitary warheads. Flight testing of these unitary HE warheads is allowed into the Phase-I areas with the strict requirement of no less than 100% accountability of all hardware dispensed into these areas.
  
- **SPECIAL PURPOSE AREAS:**
  - The southeast (SE) quadrant of the Denver WIT area and the northwest (NW) quadrant of the Rhodes WIT area were developed as special test areas. A 40-foot drop tower facility was constructed in the Denver WIT SE quadrant. Test beds in the Rhodes WIT NW quadrant are used for explosive hazard classification tests such as static detonation, slow and fast cook-off, sympathetic detonation, and bullet impact tests.
  - The ABC-1 impact area is a special purpose area specially designed for testing target engagement capabilities of conventional and smart submunitions. The ABC-1 complex encompasses a 5,000 foot diameter cleared area, a racetrack, and a tank staging area. The tank staging area is north and east of the impact area center and extends

approximately 10,000 feet north in racetrack shape from the northernmost edge of the 5,000 foot diameter impact area. Three 50-foot wide tank approach roads extend from north to south of the impact area center. The roads are approximately 13,000 feet long from the start of the staging area to past the center of the impact area. They are composed of natural soil and are untreated. A return road located tangent to the northernmost edge of the circle connects the two legs of the racetrack to permit moving targets such as tanks to return to the staging area during mission abort.

**SAFETY ASPECTS OF IMPACT AREAS:** Each of the three Phase-II WIT areas is enclosed by a six-strand barb wire fence and is conspicuously posted with “explosive warning” signs around the perimeter. During all operations within any of the three Phase-II WIT areas, standby medic and ambulance support is provided for emergency treatment and transportation of injured personnel to local (Alamogordo, Socorro, NM) medical facilities.. Helicopter landing facilities are readily available near all three Phase-II impact areas. To facilitate evacuation of injured personnel from inside the Rhodes WIT area, a graveled road constructed from outside the area to the center of the area.

**PROGRAM SUPPORT:** The Warheads Test Branch consists of a diversified organization staffed to support all aspects of conventional and smart submunition test programs. This includes not only the flight test portion of these programs, but also all other critical aspects related to systems performance of these programs. The Warheads Test Branch has effectively and timely supported the systems and safety performance of the following programs:

- Multiple Launch Rocket System (MLRS)
- Guided MLRS
- Army Tactical Missile System (ATACMS)
- Joint Directed Energy Test Site(JDETS)
- Excalibur
- Non Line of Site (NLOS)
- Precision Attack Missile (PAM)
- Hellfire
- Patriot
- Patriot Advanced Capability (PAC-3)
- Large Scale Blast Propagation Experiment
- Roundup
- Brilliant Anti-Tank (BAT)
- Air Force Programs

**WARHEADS ENGINEERING AND ASSESSMENT SECTION:** The Warheads Engineering and Assessment Section provides Test Officer support such as planning and coordination, engineering, test methodology development, and the interface between the customer and test support elements. This section also provides the data reduction capabilities and personnel to develop computer-software algorithms, data analysis and evaluation techniques, and software programs for data reduction and analysis. In addition, this section provides the capability for field data collection and reduction, processing of test data commensurate with specific system requirements, performance of test statistical analysis, and the reporting of rocket/missile warhead performance as required by Branch customers.

The Warheads Test Section provides the test preparation, test set-up, test instrumentation, test conduct, operating procedures, thorough collection of field test data, and impact area preparation.

## POST TEST DATA REDUCTION APPENDIX:

### DATA PRODUCT CATEGORIES:

**TRAJECTORY AND ATTITUDE:** Position, velocity and acceleration are computed from electronic and optical instruments. Attitude data are computed from optical instruments or extracted from telemetry. Many parameters are derived from these basic quantities. A pre-processor is used to detect and delete wild measurement values and to compute measurement error variances. The error variances are used in computing weights for the estimation algorithms. Smoothed position, velocity and acceleration data are produced with an adaptive fixed-interval filter smoother. The smoother is based on the Bryson-Frazier formulation of the optimal smoother which adapts quickly and reliably to abrupt changes in accelerations.

**THE TRAJECTORY DATA:** reduction process combines the calibrated and pre-processed azimuth and elevation measurements from fixed and/or tracking cameras, the range, azimuth and elevation from radars or laser trackers, or phase difference measurements from interferometers to estimate the position of an object for each measurement time.

**ATTITUDE AND ROLL:** is estimated from vertical angles (V-angles) or from differential measurements using fixed cameras, tracking cameras and telescopes. Attitude can also be extracted from telemetry.

**DATA ERROR:** Data pertaining to data error estimations and performance of Range instrumentation can also be derived and delivered.

- **MISS DISTANCE.** Miss Distance is computed from a comparison of the trajectories of two objects; however, Miss Distance data requires both objects to be in the same media frame. The reference point on each object must be specified. A summary page is printed for the time of minimum approach (TMA) and for an additional two event times specified by the customer.
- **SURFACE MISS DISTANCE.** Surface Miss Distance (SMD) provides an interactive representation of the intercept containing high resolution 3-D engineering models of the missile and target. MPARS (Mission Playback Analysis and Reporting System), a free 3-D flight visualization application is provided, allowing range customers the ability to visualize and interact with their data and to provide intuitive and interactive methods of analysis. This application allows users the ability to playback their data and navigate through synthetic terrain with realistic models using predefined or user-interactive viewpoint perspectives. If requested, graphical snapshots of various events of interest, e.g., warhead, impact, and minimum approach time can be provided.

● **TARGET MOTION RESOLUTION.** Target Motion Resolution (TMR) is a technique which extracts data from coherent radars. Data available from TMR processing include:

- Estimation of translational motion (range and derivatives, range acceleration and smoothed angle data).
- Estimation of motion about the center of mass (spin, precession and nutation).
- Estimation of aspect angles on spinning vehicles.
- Detection and interpretation of events (burnout, separation, intercept, impact, warhead detonation, etc.).
- Radar cross section.
- Radar diagnostics.
- Estimates of position data from WEIBEL (X-band) velocimetric radar, based on surveyed launch point.

**VIDEO:** Up to four channels of real-time Video information transmitted to the Range Control Center can be digitized, recorded and then made available as a standard PC .AVI file. The output medium is a CD which is available one hour after a mission is complete. Digitized video editing can also be done for composite or special video files. Post mission digitization is also available if a video media is provided.

**NEAR REAL-TIME DATA:** Position, velocity and acceleration data can be made available within one hour after a mission through the use of software which uses a nine state, optimal, fixed lag, adaptive smoother which will process radar measurements in near real time. Although the data quality available in near real time may not equal that of a post flight reduction, because of its ability to smooth N points into the past, the Near Real Time Smoother offers a significant improvement in trajectory quality over that of an optimal real time filter. Any parameters derived from position, velocity, and acceleration are also available in a variety of coordinates systems.

**MEASUREMENT UNITS:** All measurements, except time, are available in Metric and English standard units. Other units may be requested, usually without special programming.

● **TIME** - GMT is Greenwich Mean Time. T-zero time is GMT with a customer supplied time (T-zero) subtracted. A T-zero time may be specified for separate passes of a test. Time is available in Seconds in both GMT and T-zero. It is also available in hours:minutes:seconds in both GMT and T-zero.

- Linear measurements are available in meters and feet.
- Linear rates are available in meters/sec and feet/sec.
- Linear accelerations are available in meters/sec/sec, feet/sec/sec and in G's.
- Angular measurements are available in degrees:minutes:seconds, degrees, and radians. The range of values is -180 to +180 degrees (0 to 360 degrees is optional).

- Angular rate measurements are available in radians/sec and degrees/sec.

**DATA PRODUCT FORMATS:**

- Test data can be delivered in a variety of representation styles and on various media types. Chosen performance parameters can be displayed in columnar listings with selectable units, sequencing and formatting. Certain parameters may be plotted against time or against each other on 2-dimensional axis plots. Plots can be delivered in hardcopy format or delivered as files which can be viewed with “freeware” viewers.
- Data can be represented in standard or mission specific coordinate systems. The basic system can be referenced to the WGS-84 spheroid, the Clarke spheroid of 1866, or the WGS-72 spheroid. The system origin and orientation can be defined by the coordinate system itself, the target attitude or velocity vector, the missile attitude or velocity vector, or the relative velocity vector.
- Data can be delivered on a wide variety of industry-standard media including:
  - Digital media, such as, DVD and CD.
  - Hardcopy media, such as columnar listings, full-color axis plots, snapshots, etc.
  - Electronic media transfer, including electronic mail and File Transfer Protocol (FTP).
  - Other removable media can be accommodated based on project requirements.

**INDIVIDUAL PARAMETERS:** These are the variables computed for individual objects. The positions have been translated to the new origin and the positions, velocities, accelerations, attitude and sigmas have been rotated to the new origin and reference azimuth orientation. Data are interpolated to the generated output time. If the data does not exist for an object at an output time, the parameters are set to a predetermined bad data flag.

0	TIME	
1	XPOS	X position, downrange along reference azimuth
2	YPOS	Y position, crossrange, 90 deg clockwise from X
3	ZPOS	Z position, up
4	XVEL	X velocity, downrange along reference azimuth
5	YVEL	Y velocity, crossrange, 90 deg clockwise from X
6	ZVEL	Z velocity, up
7	XACC	X acceleration, downrange along reference azimuth
8	YACC	Y acceleration, crossrange, 90 deg clockwise from X
9	ZACC	Z acceleration, up
10	SIGXP	X position sigma
11	SIGYP	Y position sigma
12	SIGZP	Z position sigma
13	SIGXV	X velocity sigma
14	SIGYV	Y velocity sigma
15	SIGZV	Z velocity sigma
16	SIGXA	X acceleration sigma
17	SIGYA	Y acceleration sigma
18	SIGZA	Z acceleration sigma
19	SIGPOS	Total position sigma
20	SIGVEL	Total velocity sigma
21	SIGACC	Total acceleration sigma

22	E	Earth centered coord E
23	F	Earth centered coord F
24	G	Earth centered coord G
25	DELX	X position residual
26	DELY	Y position residual
27	DELZ	Z position residual
28	XRAW	Unsmoothed X position
29	YRAW	Unsmoothed Y position
30	ZRAW	Unsmoothed Z position
31	RANGE	Slant range
32	GRANGE	Ground range
33	RDOT	Range rate
34	GRDOT	range rate
35	TOTVEL	Total velocity
36	GVEL	Ground velocity
37	AZ	Azimuth, clockwise from X
38	EL	Elevation, positive up
39	PHI	Azimuth of velocity vector
40	THETA	Elevation of velocity vector
41	PHIDOT	Azimuth rate of velocity vector
42	THEDOT	Elevation rate of velocity vector
43	DGAMMA	Total turning rate of velocity vector
44	RADCUR	Radius of curvature
45	ACCT	Acceleration tangent to velocity vector
46	ACCN	Acceleration normal to velocity vector
47	ANAZ	Horizontal component of Normal acceleration
48	ANEL	Vertical component of Normal acceleration
49	TOTACC	Total acceleration
50	DPHI2	Geodetic latitude (Clarke)
51	DLAM2	Geodetic longitude (Clarke)
52	DH2	Geodetic Height (Clarke)
53	DWGS2	Geodetic latitude (WSG72)
54	DWGL2	Geodetic longitude (WSG72)
55	DWGS2	Geodetic Height (WSG72)
56	UTMX	UTM X, easting
57	UTMY	UTM Y, northing
58	DEAST	WSTM X, easting
59	DNORTH	WSTM Y, northing
60	YAW	Attitude yaw
61	PITCH	Attitude pitch
62	ROLL	Attitude roll
63	SIGYAW	Attitude yaw sigma
64	SIGPIT	Attitude pitch sigma
65	SIGROL	Attitude roll sigma
66	DYAW	Attitude yaw rate
67	DPITCH	Attitude pitch rate
68	DROLL	Attitude roll rate
69	ATTKAZ	Azimuth of angle of attack
70	ATTKEL	Elevation of angle of attack
71	ATTACK	Total angle of attack
72	XLESSW	X position with wind effect removed
73	YLESSW	Y position with wind effect removed
74	HTPRES	Height as a function of pressure
75	HTDENS	Height as a function of air density
76	XWIND	Wind speed in X direction
77	YWIND	Wind speed in Y direction
78	TASFT	True air speed
79	IAS	Indicated air speed
80	VSOUND	Speed of sound at a specific temperature
81	SMACH	Mach number
82	GTAS	Ground true air speed
83	DRAGAC	Drag acceleration
84	DRAGCO	Drag coefficient
85	DYP	Dynamic pressure; LB/FT <sup>2</sup> , NT/M <sup>2</sup>
86	ROW	Air density; LB/FT <sup>3</sup> , GM/M <sup>3</sup>
87	DUPCYL	Pseudo-cylindrical U, downrange
88	DVPCYL	Pseudo-cylindrical V, crossrange
89	DWPCYL	Pseudo-cylindrical W, up
90	TFALL	Time of fall since trajectory prediction started.
91	XVLOC	X velocity oriented with origin at current geodetics

92	YVLOC	Y velocity oriented with origin at current geodetics
93	ZVLOC	Z velocity oriented with origin at current geodetics
94	PRES	Air pressure at a specific altitude; LB/FT <sup>2</sup> , NT/M <sup>2</sup>
95	ATEMP	Air temperature at a specific altitude; Celsius, Kelvin, Fahrenheit or Rankin
96	AZDOT	Azimuth rate of position vector
97	ELDOT	Elevation rate of position vector
98	AZDCOS	AZDOT times cosine of EL
99	SIGPHI	Sigma of PHI
100	SIGTHE	Sigma of THETA
101	SGACCT	Sigma of ACCT
102	SGACCN	Sigma of ACCN
103	TRUEC	True course (Velocity vector azimuth)
104	TRUEH	True heading (Attitude vector azimuth)
105	XNSTA	Number of stations used in solution
106	HHHHH	Height above ground
107	DW84P	Geodetic Latitude (WGS-84)
108	DW84L	Geodetic Longitude (WGS-84)
109	DW84H	Geodetic Height (WGS-84)
110	PHIAW	Azimuth of true air speed vector
111	ASPAZ	Aspect azimuth
112	ASPEL	Aspect elevation
113	MODE	Radar mode (one digit for each radar) This parameter tells how the signal was received by the radar and is provided by WSMR. = 2 Skin track = 3 Beacon track = 4 Skin track and bias(es) were for this radar = 5 Beacon track and bias(es) were for this radar
114	RDDOT	Range acceleration
115	SIGXPR	Unsmoothed X position sigma
116	SIGYPR	Unsmoothed Y position sigma
117	SIGZPR	Unsmoothed Z position sigma
118	XNSTAA	Number of stations in the yaw, pitch solution
119	XNSTAR	Number of stations in the roll solution
120	XNSTAX	Number of stations in the roll rate solution
121	AZDDOT	Azimuth acceleration of position vector
122	ELDDOT	Elevation acceleration of position vector
123	FRLAT	Fractional part of latitude
124	FRLON	Fractional part of longitude
125	OFFSET	GRANGE*SIN (ASPAZ)
126	QX	X state noise
127	QY	Y state noise
128	QZ	Z state noise
129	SIGDYW	Attitude yaw rate sigma
130	SIGDPT	Attitude pitch rate sigma
131	SIGDRL	Attitude roll rate sigma
132	YAWRAW	Attitude yaw - unsmoothed
133	PITRAW	Attitude pitch - unsmoothed
134	ROLRAW	Attitude roll - unsmoothed
135	SIGYWR	Raw attitude yaw sigma
136	SIGPTR	Raw attitude pitch sigma
137	SIGRLR	Raw attitude roll sigma
138	BLANK	Empty column on listing or space holder on tape
139	PHINW	Azimuth of velocity less wind
140	THENW	Elevation of velocity less wind
141	PHINWD	Azimuth rate of velocity less wind
142	THENWD	Elevation rate of velocity less wind
143	DH2	Height above mean seal level
144	SIGPR	Total raw position sigma
145	ATKVVA	Azimuth of Angle of Attack (AOA) in velocity vector plane
146	ATKVVE	Elevation of Angle of Attack (AOA) in velocity vector plane
147	HOG	Height of ground above mean sea level

**RELATIVE PARAMETERS:** These variables are in the Selected Stationary Coordinate System (SSCS) and are computed for requested pairs of objects from individual variables already computed. If either object has no data for a time point, then the relative data will be set to a predetermined bad data flag. The two objects will be referred to as OBJ1 and OBJ2. OBJ1 is the reference object. The vector from OBJ1 to OBJ2 is referred to as the Line of Sight (LOS) vector. Aspect angles are computed from the OBJ2 velocity vector to the LOS vector. If OBJ1 is on the left side of OBJ2 (determined in XY plane), the aspect angle is positive. Look angles are computed from the OBJ1 velocity vector to the LOS vector. If there is no attitude data for an object, then the velocity vector will be used to determine the orientation of the longitudinal axis of the object.

0	TIME	
501	XPOSR	Relative X position
502	YPOSR	Relative Y position
503	ZPOSR	Relative Z position
504	XVELR	Relative X velocity
505	YVELR	Relative Y velocity
506	ZVELR	Relative Z velocity
507	XACCR	Relative X acceleration
508	YACCR	Relative Y acceleration
509	ZACCR	Relative Z acceleration
510	RNG	Relative range between objects
511	GRNG	Relative ground range between objects
512	RDOT	Relative range rate
513	GRDOT	Relative ground range rate
514	VEL	Total relative velocity
515	GVEL	Total ground relative velocity
516	ASPHY	Aspect angle in the X-Y plane
517	ASPHZ	Aspect angle in the X-Z plane
518	ASPHYZ	Aspect angle in the Y-Z plane
519	ASPTOT	Total aspect angle
520	LOOKXY	Look angle in the X-Y plane
521	LOOKXZ	Look angle in the X-Z plane
522	LOOKYZ	Look angle in the Y-Z plane
523	LOOKT	Total look angle
524	LOSAZ	Azimuth of LOS vector
525	LOSEL	Elevation of LOS vector
526	LOSAZR	Azimuth rate of LOS vector
527	LOSELR	Elevation rate of LOS vector
528	LOSXR	LOS rate about X axis (in Y-Z plane)
529	LOSXR	LOS rate about Y axis (in X-Z plane)
530	LOSZR	LOS rate about Z axis (in X-Y plane)
531	LOSRAT	Total LOS rate
532	NAVRAT	Navigation ratio
533	TCAXY	Track crossing angle in X-Y plane
534	PRJMIS	Projected miss distance
535	LOSXY	LOS angle in X-Y plane
536	LOSXZ	LOS angle in X-Z plane
537	LOSYZ	LOS angle in Y-Z plane
538	ASPEL	Vertical aspect angle
539	LOOKEL	Vertical look angle
540	UNXPOSR	Unsmoothed (XPOS2) - XPOS1
541	UNYPOSR	Unsmoothed (YPOS2) - YPOS1
542	UNZPOSR	Unsmoothed (ZPOS2) - ZPOS1
543	TASPHY	Aspect angle in the X-Y plane using TAS
544	TLOKXY	Look angle in the X-Y plane using TAS
545	TCAXZ	Track crossing angle in the X-Z plane
546	TOTTCA	Total track crossing angle
547	TCAXYT	Track crossing angle in the X-Y plane using TAS
548	ASPTAS	Total aspect angle using TAS
549	LOKTAS	Total look angle using TAS
550	DLOSAZ	Difference of AZ from Obj1 to Obj2
551	DLOSEL	Difference of EL from Obj1 to Obj2
552	DRANGE	Difference of RANGE from Obj1 to Obj2

**RELATIVE VARIABLES:** These variables are in the Object Oriented Coordinate System (OOCs) and are computed from the differences in position, velocity and acceleration of X, Y, Z for any two objects. These differences have also been rotated to the coordinate system whose origin is the position of the reference object. If either of the two objects is not available, then all relative variables for these two objects will be set to a predetermined bad data flag.

0	TIME	
701	XPOSR	Relative X position
702	YPOSR	Relative Y position
703	ZPOSR	Relative Z position
704	XVELR	Relative X velocity
705	YVELR	Relative Y velocity
706	ZVELR	Relative Z velocity
707	XACCR	Relative X acceleration
708	YACCR	Relative Y acceleration
709	ZACCR	Relative Z acceleration
710	RNG	Relative range between objects
711	GRNG	Relative ground range between objects
724	LOSAZ	Azimuth of LOS vector
725	LOSEL	Elevation of LOS vector

**OPTIMIZING DATA DELIVERY:** White Sands Missile Range is committed to delivering data to its customers as quickly as possible. Thorough coordination between the customer and Range representatives can help ensure that data products are delivered in a timely manner. Items required by the Range data analysts for processing varies, and includes items such as instrumentation data, survey information, completed data request forms, classification / declassification information, etc. Other specific conditions which can affect data delivery are described below:

- **Mode of Delivery:** Data will be delivered to customers using the quickest method available. The fastest and most convenient is a customer representative picking up data products at the Data Reduction Facility (DRF) output office, Bldg. 1526. The data can be mailed but this is not recommended when rapid delivery is essential. A list of people authorized to pick up data products must be available and kept current.
- **Special Programming:** The delivery times committed to by the Range do not include time required for project-specific programming. Special customer requirements such as program-specific parameters and coordinate systems should be coordinated with DRF personnel in time for the programming to be completed prior to the first test date.
- **Medium and Copies:** Delivery times can be accelerated by requesting data on digital media instead of hardcopy. Lengthy listings, multiple copies, and bound reports may take considerably longer to produce. The White Sands DRF produces data which can be viewed with any number of commercial and “freeware” products, such as Microsoft Office, DPLOT, etc. Also note that electronic data delivery (e-mail, FTP) is available for unclassified items and is probably the fastest method of data delivery.

- **Expedited Data Delivery:** Overtime, special courier service and first-in-line processing can be used to shorten the delivery times. In these cases, the customer pays for all additional costs involved. Expedited data delivery must be coordinated with the RO Range Engineer prior to scheduling the test. If the need for expediting the data occurs during the test, the customer must identify the items to be expedited to the Range controller. These items will be announced over the Range Command Net and the RO Range Engineer will coordinate the requirement during the post-test data processing.

## **VISUAL INFORMATION (VI) PRODUCTS APPENDIX:**

The terms defined below are used in the photographic industry and at WSMR to describe Visual Information products and services. These terms should be used in customer documents when requesting products or services.

### **GRAPHIC ART PRODUCTS:**

- Includes consultation, design, printing, matting and laminating

### **PHOTOGRAPHY PRODUCTS:**

- High resolution still digital documentation
- Remote still digital photography (high resolution = 17 Megapixels)
- Digital still printing at Building 1621

### **VIDEO PRODUCTS:**

- Digital video/HD video for production, documentary, and remote requirements at building 1621 and building 1512

### **DIGITAL/ HIGH DEFINITION EDITING PRODUCTS:**

- Building 1621 and 2<sup>nd</sup> floor Building 1512

### **MEDIA REPRODUCTION PRODUCTS:**

- Analog and digital video duplication, CD/DVD
- Film to video transfers: 16mm, 35mm, and 70mm
- Optics high speed digital processing and duplication. Mission data composites and Hot Wash video.

### **VIDEO TELECONFERENCING (VTC) PRODUCTS:**

- Set up and maintenance :2<sup>nd</sup> floor, south end of building 1512
- DISN VTC Center support: 1<sup>st</sup> floor, building 100

### **MULTI-SPECTRAL DIGITAL IMAGING PRODUCTS:**

#### **● INFRARED (IR):**

- Dawn, Dusk, Nighttime Imaging – Completely independent of ambient light.
- Adverse Weather Conditions – Provides superior contrast across long atmospheric paths, fog, dust, haze and humidity.
- Long-Range Applications – Superior contrasts for acquisition, tracking, intercepts, and miss events.
- Fragmentation Pattern & Debris Field Imaging – Ideal for nearly all HE events.
- Laser-Imaging – Directed Energy programs
- Instrumentation and Facility Diagnostics
- Radiometry

● **VISIBLE:**

- Low Light Cameras high speed digital cameras
- Cameras synchronized to IRIG-B carrier signal.
- Picture Quality - high resolution 12 seconds or 4 seconds at 3000 PPS.
- Live Video Out – All imagers have live video out with NTSC capable.
- Segmented Memory – cameras have on-board segmented memory to accommodate multiple launch and impact scenarios.

**DIGITAL TRANSFER PRODUCTS:** The Cintel Millennium (MMHD) is a high performance data-cine, Flying Spot (CRT) Telecine capable of transferring 16mm, 35mm standard, 35mm square (Photosonic), 35mm Vista Vision and Photosonic 10E 70mm square format films. Video transfers are available to customers outside of WSMR. This Telecine is capable of High Definition (HD) and Standard Definition (SD) digital transfers. VI is providing SD BetaCam analog and DVCAM digital transfers over an SD interface (SDI). HD transfers are recorded over an SDI to a Panasonic, DVCPRO HD Recorder/Player (AJ-HD1200A). WSMR Visual Information is providing Final Cut Studio video editing and DVD authoring to customers using new Macintosh workstations. The new ITK Millennium Flying Spot Telecine continues to be of interest to Ranges and organizations internal and external to DOD for its exceptional film to video transfer services.

## **N**UCLEAR WEAPONS EFFECTS FACILITIES APPENDIX:

**RELATIVISTIC ELECTRON BEAM ACCELERATOR (REBA):** The principal components of REBA are a Marx generator, a Blumlein transmission section, and an output tube. Stored low-voltage energy is converted to high-voltage energy by the Marx generator and then transferred to the Blumlein transmission line, which serves as a fast discharge, pulse-forming, low-inductance energy source for the output tube.

The Marx generator basically consists of a bank of capacitors that are charged in parallel and discharged in series by means of spark-gap switches. The negative voltage output of the Marx generator is placed on the coaxial Blumlein transmission line, which consists of three concentric cylinders. The pulse formed by the Blumlein is impressed across the tube diode, made up of an insulating and vacuum-holding structure, a field-emission cathode, and an anode. The anode used for the electron-beam mode of operation is a thin, low-Z target that allows passage of the electrons with minimal energy loss. For the Bremsstrahlung mode of operation, the anode used is a thick, high-Z target, selected for maximum efficiency in converting electron beam energy into Bremsstrahlung radiation.

The REBA is capable of delivering about six exposures per hour. In electron-beam mode, the total transported beam energy is approximately 6.7 kilojoules (kJ). Peak beam fluence is approximately 400 calories/square centimeter (cal/cm<sup>2</sup>). In Bremsstrahlung mode, peak dose environments of  $1.8 \times 10^4$  rad (Si) and peak dose rates of  $2.6 \times 10^{11}$  rad (Si)/second are measured. Nominal pulse widths for both modes are between 50 and 70 ns.

**LINEAR ELECTRON ACCELERATOR (LINAC):** The LINAC is a two-section, S-band accelerator powered by a pair of 21 megawatt (MW) klystrons operating at approximately 2855 megahertz (MHz). A 120 kilovolt (kV) electron beam is injected into the accelerator and the resultant accelerated beam (at levels up to 48 mega electron volts [MeV]) exits through a thin, water-cooled aluminum window. The beam diameter is approximately 1 millimeter (mm) at the exit window, with angular divergence of the beam dependent on the beam energy, which can be varied from 1-48 MeV. The electron beam may irradiate test items, or the electrons can be impacted on a thin platinum target to create high-energy Bremsstrahlung pulses with a 30-degree exit cone.

Pulse reproducibility and predictability are excellent. Maximum duty ratio is 0.12%, providing a repetition rate up to 60 pulses per second (pps). Variable-delay triggers are available for instrumentation triggering, synchronized with the LINAC output pulse. LINAC parameters and operating characteristics are very flexible, and arrangements can be made for operation in other-than-routine modes, as well as for around-the-clock operation.

The LINAC was specifically designed to accommodate experimenters and includes a 100 decibel (dB) screen room, a real-time digital data acquisition and processing system, support instrumentation, and extensive dosimetry. Power supplies, signal generators, multifunction meters, and other items are available upon request.

**FAST BURST REACTOR:** Pulsed output of the FBR provides maximum fluencies in free field of  $6.5 \times 10^{13}$  neutrons/square centimeter (n/cm<sup>2</sup>) with associated prompt gamma doses of 16 kilorad (silicon) krad (Si). At the normal level of 8 kilowatts (kW),

steady-state power runs produce an accumulated maximum fluence with every 10 minutes of operation. A fluence increase of a factor of five may be achieved within the internal irradiation cavity of a modified core.

Normal operation of the reactor is within an exposure cell 15.2 meters (m) square by 6.1 m high. Large test items may be handled through a shielded door 3.6 m wide by 4.6 m high. To accommodate special test requirements, the FBR can also be operated out of doors in an open air environment.

Following operation, the reactor is remotely lowered into a shielded storage pit to allow cell access for experimenter personnel. Several materials are available for shielding test equipment from both neutron and gamma radiation. Active experiments can be monitored from the cell next to the experimenter's room using existing facility cabling installed to support instrumentation, including a real time digital acquisition and processing system.

**GAMMA RADIATION FACILITY (GRF):** The GRF uses eight triple-encapsulated, cylindrical cobalt-60 (Co-60) sources, replaced every five years, to provide varying levels of gamma radiation. During exposure, the sources are all contained within a 0.2 m diameter circle on the front face of an exposure head assembly. System level tests can easily be conducted outside the test cell by opening the large roll-up door opposite the exposure head. Also, a segment of the roof can be removed to provide a source for overhead or airborne experiments. Any combination of the eight sources may be used to achieve the desired level of exposure. Exposure time for each of the sources is individually controllable in increments of one second. Any desired duration may be used. Real-time dose and dose-rate instrumentation is available. Users may use permanently installed cables or install their own (runs are between 30 and 70 feet).

**WHITE SANDS SOLAR FURNACE (WSSF):** The WSSF operates in both steady-state and pulsed mode and can provide both rectangular and shaped (nuclear) pulses. A precisely machined shutter wheel is used to produce the pulse shapes characteristic of thermal pulses from nuclear detonations. The special design of the WSSF also provides the pulsed thermal environment suitable for materials testing. For a combined aerodynamic/thermal environment, the WSSF has a subsonic wind tunnel with velocities up to 183 m/s. The WSSF is a focusing, solar-energy collector with four main components: a heliostat, an attenuator, a concentrator, and a test chamber. The heliostat, an array of 356 flat mirrors on a 12.2 m wide by 11.0 m high steel structure, automatically tracks the sun to reflect thermal energy through the movable louvered blades of the attenuator to the concentrator. The concentrator consists of 180 spherical mirrors on a 9.1 m square steel frame located 29.3 m from the heliostat. Each mirror is mounted to concentrate the thermal energy at the focal plane of the facility in the test chamber. A remotely controlled, three-axis table is available for positioning of experiments at the focal plane. Instrumentation includes various types of calorimeters, thermocouples, and analog and digital recording instruments. A 20-channel instrumentation van supplements the data channels that are available in the test chamber.

**SEMICONDUCTOR TEST LABORATORY (STL):** The specific purposes of the STL include the verification of complex software survivability models, the determination

and documentation of large variations in semiconductor device responses to various nuclear environments, and the tracking and documentation of changes in the manufacturing processes of various semiconductor devices used by the military.

STL personnel also analyze the performance of specific system applications of devices that have been tested, generate parametric data for circuit analyses, perform lot acceptance testing for the government, and manage an ever growing database of nuclear survivability data on every device and component tested. This exhaustive database, together with the complete range of simulated nuclear environments available at SV, enables the personnel at the STL to perform any level of nuclear effects test and/or analysis required in an expedient, cost-effective manner. They can conduct basic test and data collection or a more sophisticated evaluation of a system's requirements versus the performance of the system's piece-parts in a nuclear environment. When required, they can also perform in depth assessments of a system's nuclear survivability while in its intended use and environment.

## **DIRECTED ENERGY WEAPONS EFFECTS:**

### **LASER FACILITIES:**

**PULSED LASER VULNERABILITY TEST SYSTEM (PLVTS):** Central to the PLVTS is a closed-cycle, electric-discharge, pulsed CO<sub>2</sub> laser. Operating at 10.6 μm, this proven laser delivers moderate to high energy levels, with low maintenance and operating costs. Power is delivered on target via the sophisticated Advanced Pointer/Tracker (APT). The total system consists of the pulsed CO<sub>2</sub> laser, APT, control room, laser beam diagnostics, and 50 cm static output telescope, all mounted in a 60 foot System Van. A 25-foot Utility Van houses necessary ancillary equipment. For downrange target data acquisition, a 35-foot Mobile Target Van contains optics and diagnostic instrumentation. PLVTS supports a full complement of beam diagnostic instrumentation for measuring critical output parameters of the laser and selected parameters at the target plane. A Macintosh-based data acquisition system provides ease of set-up and modification of desired parameters. The PLVTS is a platform for performing survivability and hardness evaluations of weapon systems and commercially developed EO equipment.

White Sands Missile Range (WSMR) provides extensive facilities and technical support for performing a wide range of dynamic, climatic, and propulsion tests. Facilities are available for performing tests on either hazardous (explosives) or non-hazardous test items. Dynamic environmental test capabilities include vibration, shock and sustained acceleration tests. All dynamic tests can be performed under controlled extreme high or low temperatures. Climatic environmental test capabilities include high and low temperature, temperature shock, solar radiation, low pressure (high altitude), salt fog, rain (rain with wind), snow loading, icing/freezing rain, sand and dust, humidity, fungus (microbiological), and leakage testing. Propulsion system testing includes instrumented static firing and motor case burst testing. Extensive instrumentation and data processing capabilities are available to characterize missile launch environments during test firings. All instrumentation is calibrated to NIST standards.

## CLIMATIC TEST FACILITIES APPENDIX:

**LARGE TEST CHAMBER:** The Large Test Chamber (LTC) is 105' L x 40' W x 50' H with the ability to conduct temperature tests ranging from  $-62^{\circ}\text{C}$  to  $93^{\circ}\text{C}$  ( $-80^{\circ}\text{F}$  to  $200^{\circ}\text{F}$ ). In addition to these temperature extremes, solar radiation ( $1120\text{ W/m}^2$ ) and freezing rain/ice testing can be conducted in the LTC.

**SMALL TEST CHAMBER:** The Small Test Chamber (STC) is 35' L x 30' W x 20' H with identical test capabilities as the LTC. The LTC and STC have exhaust and replenishing air capabilities to allow for the operation of equipment (gasoline engines, gasoline heaters, etc.) at the temperature extremes.

**SALT FOG/HUMIDITY CHAMBER:** The Salt Fog/Humidity Chamber is 15' L x 20' W x 10' H and is capable of conducting high temperature [ambient to  $71^{\circ}\text{C}$  ( $160^{\circ}\text{F}$ )], solar radiation ( $1120\text{ W/m}^2$ ), humidity (95% Relative Humidity), and salt fog testing.

- Temperature shock testing can be conducted by utilizing a combination of any two temperature conditioning chambers with a transition time of approximately five minutes.
- The solar radiation testing (heating effects only) is conducted by the use of three quartz lamp banks, each approximately 15' wide by 17' long, that can be suspended end to end or individually depending on the test item requirements.

**ENVIRONMENTAL TEST AREA II:** At ETA-II there is a large microbiological chamber for conducting fungus, high temperature, and humidity tests. This chamber has an internal dimension of 30' L x 22' W x 16' H. There is a rain test bed for conducting outdoor rain testing [up to 305 mm/hr (12 in/hr)]. Two 200 hp wind generators are available for providing winds up to 35 m/s (80 mph) over a 16' by 10' area. These wind generators can be utilized alone or in combination with rain or sand/dust. A sand/dust feed system is available for conducting unconditioned field sand/dust tests, which can supply up to 11 kg/min (25 lbs/min) of sand/dust. There also is a dust chamber with a test volume of 4' H x 4' W x 4' D. The dust chamber air temperature and relative humidity are controllable between  $16^{\circ}\text{C}$  to  $71^{\circ}\text{C}$  ( $60^{\circ}\text{F}$  to  $160^{\circ}\text{F}$ ) and 5% to 30% Relative Humidity. The dust chamber can supply dust concentrations up to  $10.6\text{ g/m}^3$  ( $0.3\text{ g/ft}^3$ ) with wind velocities of up to 29 m/s (65 mph). In addition to these test capabilities, smaller temperature chambers are available to conduct temperature, humidity, and salt fog testing on small items. When required and if the test items are safety compatible, multiple tests can be conducted simultaneously at ETA-II. The ETA-II is approved for hazardous testing of explosive test items up to 30,000 lbs of Class 1.1.

**HOT CHAMBER:** The Building 1544 Hot Chamber located on the main post is 70' L x 24' W x 22' H has the ability of conducting high temperature [ambient to  $71^{\circ}\text{C}$  ( $160^{\circ}\text{F}$ )], solar radiation ( $1120\text{ W/m}^2$ ), humidity (95% Relative Humidity), and salt fog testing. This facility is for non-hazardous test items only.

**ALTITUDE CHAMBER:** A small multipurpose altitude chamber located at the 300K Dynamics Test Facility and can generate altitude environments from 500 feet below sea

level to 150,000 feet above sea level. The altitude chamber has a test volume of 2' L x 2' W x 2' H. For larger test items requiring an operational altitude of 10,000 ft, there is Atoms Peak, approximately 60 miles from main post. Both of these are certified for explosive test items.

**IMMERSION TANK:** A transportable four-foot cubed leakage (immersion) tank is available for immersion depths of one meter.

**CONDITIONING EQUIPMENT:** Portable conditioning equipment and shrouds are available for temperature testing anywhere at WSMR. The shroud size range is large enough to condition a launcher with missile (PAC-3) to small enough to condition a computer chip. These field conditioning units are capable of conducting temperature tests ranging from  $-45^{\circ}\text{C}$  to  $71^{\circ}\text{C}$  ( $-50^{\circ}\text{F}$  to  $160^{\circ}\text{F}$ ).

## DYNAMIC TEST FACILITIES:

**VIBRATION TEST CAPABILITIES:** The 300K Dynamic Test Facility is located 2 miles from the main post area and is approved for the testing of explosive test items up to 5,000 lbs of Class 1.1. Several electrodynamic vibration exciters are available for hazardous or nonhazardous testing. Large reaction masses accommodate multiple exciters for tests involving large forces, massive test items, or multiple degrees-of-freedom excitation. A wide range of test setups can be accommodated in particular large structure testing using multiple shakers. Simultaneous temperature conditioning testing can be accomplished during vibration and shock testing.

**VIBRATION CONTROL SYSTEMS:** Computer-based vibration control (VC) systems include the Spectral Dynamics 2550-B (2 each) and the Data Physics Inc. Vector II Systems (2 each) which are available to provide drive signal generation and closed-loop control for stationary or transient test environments. Mixed mode vibration control capabilities are available to simulate road transport environments as follows:

● **WIDE BAND RANDOM:**

- Wide band random with multiple random narrow-bands.
- Wide band random with multiple (varying magnitude) narrow-bands.
- Wide band random with multiple sine tones.
- Wide band random with multiple (varying magnitude) sweeping sine tones.
- Wide band random with multiple (varying magnitude) sweeping random narrow-bands and with multiple (varying magnitude) sweeping sine tones.
- Wide band random with shock pulses.

● **ELECTRODYNAMIC VIBRATION EXCITERS:** Exciter (shaker) specifications are described in Table 1.

**TABLE 1. EXCITER SPECIFICATIONS**

Shaker	Quantity	Force Rating (Pound-Force)	Displacement (Inches)	Frequency Range (Hertz)
UNHOLTZ-DICKIE	1	2,000	1	5 to 3,000
LING 335	8	18,000	1	5 to 2,000
LDS 964LS	4	16,000	2	5 to 2,000
UNHOLTZ-DICKIE	1	50,000	2	5 to 3,000

● **THREE DIMENSIONAL (3D) ELECTRODYNAMIC VIBRATION SYSTEM:**

The three dimensional vibration systems simultaneously produce vibration in three directions. The system is capable of testing a 100 pound item to 10 G's peak with a frequency bandwidth of 5 to 500 Hz. The test item table size is 3 x 3 ft.

- **LOOSE CARGO TEST CAPABILITIES:** Two loose cargo (package bounce) test machines are available. The loose cargo machines meet the requirements of MIL-STD-810 and ITOP 4-2-602. The maximum test specimen weight is limited to 6,000 pounds.

**SHOCK TEST CAPABILITIES:** An extensive array of equipment is available for shock testing. All shock tests can be remotely controlled to accommodate explosive and hazardous test items.

- **SHOCK TESTING USING ELECTRODYNAMIC EXCITERS:** Electrodynamic exciters can be used to produce classical pulses (half-sine, saw-tooth, trapezoidal/square-wave) and complex pulses using shock synthesis techniques. Repetitive transient and wide-band random with mixed shock pulses (transient) can also be produced.

- **SHOCK MACHINES:** Shock tests which require classical high peak accelerations or large velocity changes can be accommodated on shock test machines. All shock test machines can be configured to provide half-sine, terminal peak sawtooth, or trapezoidal/square-wave shock pulses. Three shock machines are available and are described in Table 2.

**TABLE 2. SHOCK MACHINE CAPABILITIES**

Characteristic	12x12 shock machine <sup>1</sup>	36x36 shock Machine <sup>2</sup>	60x60 shock machine <sup>3</sup>
Table Mounting Surface	12 inches by 12 inches	36 inches by 36 inches	60 inches by 60 inches
Max. Specimen Height	14 inches	Approximately 15 ft	Approximately 15 ft
Max. Specimen Weight	2,000 pounds	4,500 pounds	5,500 pounds
Max. Acceleration	10,000 G (50 lb specimen)	1,500 G (1,000 lb specimen)	200 G
Min. Pulse Duration	0.2 milliseconds	1.0 milliseconds (1,000 lbs)	2 milliseconds

- 1 Typical shock tests range from 11 milliseconds @ 100 G's to 35 milliseconds @ 15 G's using long stroke gas programmer for half sine only.
  - 2 Typical shock tests range from 6 milliseconds @ 200 G's to 13 milliseconds @ 100 G's using four universal gas programmers.
  - 3 Typical shock tests include 11 milliseconds @ 35 G's
- **RAIL IMPACT TESTING:** Rail Impact tests are conducted in accordance with MIL-STD-810 utilizing facilities at Ft. Bliss Air Defense Center, Texas.
  - **PENDULUM IMPACT MACHINE:** A pendulum impact shock machine with a sixteen foot cable length and a 10 x 16 ft mounting platform is available for performing packaged container transportation shock tests in accordance with MIL-STD-810.

● **ROUGH HANDLING (DROP SHOCK) TESTS:** Facilities are available to provide rough handling drop tests in accordance with MIL-STD-810 (Transit Drop) and ITOP 4-2-602.

● **PYROTECHNIC TESTING:** Facilities and equipment are available to create a wide range of shock test environment specifications having extremely high acceleration levels of up to 100,000 G's using either metal-to-metal impact fixtures or explosive based techniques to generate a test specific shock pulse (Shock Response Spectrum).

**PROPULSION TEST CAPABILITIES:** A horizontal thrust test stand is available for static firing rocket motors up to 40 inches in diameter and generating thrust up to 100,000 pounds-force. Motor case burst pressure tests and squib igniter tests can be accommodated. Extensive instrumentation is available for propulsion measurements including vibration, shock, pressure, strain, igniter pulse and thrust.

**ACCELERATION TEST CAPABILITIES:** A 108-inch radius arm centrifuge is available for constant acceleration testing. The centrifuge can subject a test item weighing up to 300 pounds to a force of 100 G's. Accelerations of up to 200 G's can be achieved for small packages (< 25 pounds). Test item monitoring and support can be accomplished via the available 30 channel slip ring assembly.

**DATA ACQUISITION CAPABILITIES:** Digital recording data acquisition systems are available. Digital data sample rates of up to 20K samples/second can be achieved for a total of 64 channels. Over 80 analog recording channels are available with a dynamic range of 40 dB over a frequency range of DC to 20 kHz.

**DATA PROCESSING CAPABILITIES:** Data can be processed in the time, frequency, or amplitude domain. Typical data processing includes auto- and cross-correlation, power spectral density, coherence, frequency response functions, impulse response functions, probability analysis, and shock response spectrum analysis.

**INSTRUMENTATION CAPABILITIES:** Extensive instrumentation systems are available and are capable of measuring the following: sound pressure, acceleration, velocity, displacement, force, strain, pressure, temperature, and time sequence. Mobile instrumentation vans are available to support tests performed at locations throughout the Range.

**LOAD TESTING AND CENTER OF GRAVITY TEST CAPABILITIES:** A variety of load cells (from 5 to 100,000 lbs) and weight scales are available for performing load tests (dynamic or static) and center of gravity tests on vehicles and shelters.

**CHEMISTRY LABORATORY APPENDIX:** The White Sands Missile Range Chemistry Laboratory provides a wide variety of both centralized and on-site analytical services to the projects at WSMR and at other commands. These services are available to all DOD and non-DOD activities plus state and local governments. Non-government agencies can also obtain support in the same manner as government agencies.

**MAJOR SUPPORT CATEGORIES:** The major support categories available are as follows:

- Conformance Testing of Material
- Missile Exhaust Gas Analysis
- Chemical Analysis of Explosives
- Failure Analysis
- Miscellaneous Chemical Analysis
- Technical Consultation
- Environmental Quality Analysis

**LABORATORY STAFF:** The laboratory staff consists of seven full-time chemists. The technical breakdown is as follows:

- Laboratory Director (Ph.D.)
- Quality Assurance Officer
- Lead Inorganic Chemist (M.S.)
- Lead Organic Chemist
- Inorganic Chemist
- Organic Chemist
- General Chemist

The laboratory has over 80 years of combined experience in the field of analytical and environmental chemistry.

The laboratory has nearly completed the procedural steps for ISO 17025 accreditation from the National Environmental Laboratory Accreditation Program (NELAP). The current focus for accreditation is the analysis of hazardous waste material and other analyses as described in SW-846 and other EPA methodology.

**ANALYSES AVAILABLE:** These analyses are inclusive but not limited to:

- TCLP extraction for volatiles, semi-volatiles and metals (EPA Method 1311)
- Volatiles analysis (EPA Method 8260B)
- Semi-volatile analysis (EPA Method 8270C)
- Metals analysis (EPA Method 200.7, 200.8, 6010)
- Mercury analysis (EPA Method 7470A, 7471A)
- Ignitability (EPA Method 1010, 1020)
- Corrosivity (EPA Method 9040B, 9045C)
- Petroleum hydrocarbons (EPA Method 8015 Mod., 418.1)
- PCBs (EPA Method 8082)
- Explosives (EPA Method 8330)
- Paint filter liquid test (EPA Method 9095A)

The laboratory Quality Assurance Plan Manual can be provided upon request. Typical analytical turnaround times of 8-11 workdays can be expected for many analyses depending on holding times and complexity. Some of the more complex and/or specialized determinations may require 14-18 workdays to complete. For special requirements, shorter turnaround times can be negotiated. Sample collection is usually best handled by the customer. The Chemistry Lab will provide all required containers and preservatives for sample collection. However, there are occasions when the chemistry laboratory staff can collect samples at an additional cost. Laboratory personnel can work with you to determine your sampling needs. Analytical reports are generated within 3 days of analysis completion. Information/preliminary draft copies can be sent via fax or email at the customer's request.

## **AIR FORCE 46<sup>TH</sup> TEST GROUP DETACHMENT 1 APPENDIX:**

**746<sup>TH</sup> TEST SQUADRON:** Following is a description of some of the 746th Test Squadron capabilities:

**CENTRAL INERTIAL GUIDANCE TEST FACILITY (CIGTF):** The 746th Test Squadron (TS) is also known as the Central Inertial Guidance Test Facility. CIGTF's low dynamic mobile land navigation test labs offer an effective means for low cost performance and susceptibility test and evaluation. Each mobile lab is fully instrumented with the latest in test support equipment.

**GPS ELECTRONIC COMBAT (EC) TESTING:** CIGTF has also developed numerous tools and processes that have established us as the leader in GPS EC threat environment testing. For example, the Portable Field Jamming System (PFJS) is one of many mobile test assets CIGTF uses for EC testing. With proper planning, GPS threat lay-downs, signal structures, and power levels can be generated to represent a realistic EC environment. Using Navigation Test and Evaluation Laboratory (NAVTEL)'s modeling and simulation development processes to create representative test scenarios allows us to effectively produce customer defined threats prior to field and flight-testing. By using NAVTEL in this process, significant savings are realized by the customer.

**SLED TESTING:** The 10-mile long Holloman Air Force Base High Speed Test Track (operated by 846<sup>th</sup> Test Squadron) offers precise effective low, medium, and high dynamic operating environment for testing, evaluating, and validating GPS based guidance and control systems, inertial navigation systems, and truth reference systems. Sled Accuracy is as follows:

Distance: 0.003 ft; Velocity: 0.0013 ft/sec; Azimuth: <0.5 arcsec

**FLIGHT TESTING:** Following functional and performance verification in CIGTF's laboratory and field test environments, flight testing of the item is conducted at WSMR.



CIGTF's fully instrumented aircraft, including the F-16, AT-38, C-12, and UH-1 are used to provide various low, medium, and high dynamic operating environments for the system under test. Each platform is capable of hosting virtually any combination of INS, GPS, and/or integrated GPS/INS navigation and guidance systems and each platform is fully instrumented for data acquisition.

**REFERENCE SYSTEMS:** CIGTF provides a wide variety of TSPI Truth Reference Systems for field and flight-testing. In addition to our high dynamic sled testing, CIGTF reference systems also include CHAPS. The CIGTF High Accuracy Post-Processing

System (CHAPS) provides a high accuracy validated truth reference source that can be used in either a clear or hostile EC environment.

**TEST SUPPORT NETWORK:** In support of the Congressional mandate to integrate GPS User Equipment (UE) technology into all DOD weapon systems, CIGTF has developed a wide area differential GPS truth reference system called the "Test Support Network" (TSN). The TSN provides a superior, cost-effective, truth reference source for platform integrators to use to test and evaluate GPS based guidance and navigation systems.

**LABORATORY TESTING:** The Inertial Laboratory at CIGTF offers a unique, seismically stable environment used to test precision inertial components and systems used for navigation, guidance, and control, and tracking. The Inertial Laboratory features: a Contraves 53Y three-axis table with an integrated environmental chamber mounted on an isolation pad, a Contraves 53M three-axis table mounted on an isolation pad eight, and Contraves rate and position tables.

**GPS RECEIVER AND INTEGRATED SYSTEM TESTING:** The CIGTF NAVTEL is a state-of-the-art facility used for testing stand-alone GPS UE and integrated GPS navigation systems. NAVTEL enables GPS UE hardware and software to be fully exercised under laboratory conditions by using real-time simulation of GPS satellite signals in conjunction with simulated and/or hardware-in-the-loop host vehicle aiding and communication systems. The ability of NAVTEL to fully exercise and simulate realistic operational conditions, including operations in a threat environment, results in a cost effective approach to testing prior to field and flight testing.

**ENVIRONMENTAL TESTING:** The Environmental Laboratory at CIGTF provides the capability to simulate actual operational profiles in low, medium, and high dynamic environments. A full spectrum of temperature, altitude, humidity, and vibration environments can be effectively created to ensure the system under test is fully exercised in a realistic hostile environment.

#### **846<sup>TH</sup> TEST SQUADRON:**

**HOLLOMAN HIGH SPEED TEST TRACK (HSTT):** The Holloman High Speed Test Track is a rocket test and aerospace test facility which provides an efficient and safe means of testing customer test items while minimizing risks and reducing cost for a wide variety of test hardware in a near operational environment. Specific advantages are: the test items are recovered for post-run analysis; the sled provides sustained linear and dynamic acceleration and velocity with superimposed, tailored vibration; and the sled track provides extremely accurate test article positioning and time correlation. Repeated tests of the same test item provide an independent evaluation of modifications made during a development program.

The Holloman High Speed Test Track is the longest (50,788 feet) and most precisely aligned and instrumented facility of its kind in the world. The track is used to simulate selected trajectories of aircraft and missiles under stringent conditions. Sled speeds up to 7,000 ft/sec are routine, while speeds above 8,900 ft/sec have been demonstrated. Depending on mission needs, sled weights range from 100 to 30,000 pounds; however,

heavier sleds can be operated as required. Also, depending on payload size, accelerations above 200 g's have been demonstrated. The Holloman High Speed Test Track is organized as a squadron under the 46<sup>th</sup> Test Group, a tenant organization on Holloman Air Force Base, New Mexico. It is physically located near the eastern boundary of WSMR, virtually unaffected by environmental and encroachment problems. While operated primarily for the needs of the Air Force Materiel Command, its test capabilities are also available for other Government agencies and their respective contractors.

#### **HIGH SPEED TEST TRACK (HSTT) TEST CAPABILITIES:**

- **LETHALITY TESTING:** Missiles, warheads, bombs, hit sensors, and hit-to-kill interceptors have been subjected to impact testing against stationary inert and live munition targets at speeds ranging from 3,000 to 8,000 ft/sec. To prevent sled debris contamination on a target, the sled payload or test item can be released from the sled just prior to impacting the target by means of a "pull-down" facility.
- **EXPLOSIVE BLAST EFFECTS TESTING:** Blast effects on moving sleds are conducted with high-explosive detonations. The objective of blast testing on the track is the simulation of an explosive blast shock wave intercept on full-scale reentry vehicles and on components of aircraft, missiles, and aerospace systems during supersonic and hypersonic flight.
- **ENVIRONMENTAL EROSION TESTING:** Rain, ice/hail, dust and other particle erosion testing have been conducted at the Test Track. Rain erosion testing is conducted to study the erosive effects of extended supersonic or hypersonic flight through rain clouds on material samples, fuzes, sensors, seeker heads, electro-optical windows, radomes, shrouds, inlet diffusers, and other components of weapons and aerospace systems. The simulation of a reentry vehicle or ICBM entering a dust or pebble environment caused by a nuclear blast have also been conducted at supersonic and hypersonic speeds. Recoverable test samples from subsonic test speeds up to 7,400 ft/sec are routine. A single test item can be mounted to existing monorail test sleds and propelled through a simulated rain field. Multiple samples on special 7-cone test fixtures or wedges attached to a monorail sled have been conducted. A standard simulated rain rate of 2.5 inches/hour through a length of 6,000 feet is also routine. Shorter lengths of simulated rain fields can be provided. Lighter rain rates have been charted and provided in accordance with special customer requirements. A 2000 foot ballistic test range adjacent to the Test Track with simulated rain rates up to 25 inches per hour has been used for artillery fuze testing.
- **HYPERSONIC ENVIRONMENTAL TESTING:** Structural materials and ablative or refractory coatings are tested to evaluate aerothermal effects in a hypersonic environment. Test articles and samples included heatshields, radome covers, missile and interceptor nose cones, and shrouds. Test samples can be recovered after a sled test for post-test analysis and evaluation.

- **DISPENSER SYSTEMS TESTING:** This category of testing encompasses the dispensing or launching of rocket-powered weapons, the dissemination of bomblets, flechettes, submunitions, and the dissemination of power-like substances from payload carriers mounted on a test sled in a dynamic environment. The dispensing of radome covers or shrouds protecting seekers or electro-optical windows have also been demonstrated at supersonic and hypersonic test speeds.

**NATIONAL RADAR CROSS SECTION TEST FACILITY:** The National Radar Cross Section (RCS) Test Facility (NRTF) is the premier DoD facility for RCS testing. Formerly known as RATSCAT, which began measuring radar scattering in 1963, it is comprised of two complementary sites, Mainsite and RATSCAT Advanced Measurement System (RAMS). Assigned to the U.S. Air Force's 781st Test Squadron, NRTF is located west of Holloman Air Force Base, New Mexico in a rolling gypsum region of WSMR. NRTF specializes in the RCS characterization of full-scale, aerodynamic vehicles and antenna radiation pattern development. Due to its remote, secure environment, it can also accommodate customers requiring specialized testing of developmental electronics systems. NRTF products directly support weapon system development programs, vulnerability assessment studies, and mission planning efforts throughout the DoD.

**MAINSITE:** Mainsite has a ground plane RCS range with monostatic and bistatic capabilities to support a variety of targets ranging from small targets to full-scale operational targets. Both fixed and portable equipment can be set up in a wide variety of configurations for special tests. Mainsite is divided into two main ranges: The North Range, comprised of Pits 3, 5, and 6, and Pit 2 in the West Range. In addition, portable equipment can be set up in a wide variety of configurations for special tests. Test targets at Mainsite can be mounted on polystyrene foam columns of various height on rotating tables. The rotating tables accept a wide variety of targets ranging from small missiles and reentry vehicles to full-size aircraft and ground vehicles weighing up to 60,000 pounds. Measurements at Mainsite can be made at any frequency from 120 MHz to 18 GHz and at frequencies of 34 to 36 GHz and 94 GHz. Both monostatic and bistatic RCS, as well as antenna patterns, can be measured, and special measurements such as near-field, JEM, glint, and Doppler are available upon request. Additionally, a tailored data package, full test reports, including analysis and interpretation of data, and special data processing are provided to range users according to their requirements. In addition to these capabilities, Mainsite has the resources to accomplish the design and construction of model targets.

Modeling standards are based on customer requirements, radar scattering principles, and fabrication techniques. Linear model dimensions of  $\pm 0.2$  percent are routinely achieved with angle accuracy of 0.05 degrees. Model Shop personnel have built models up to 58 feet in length and can perform extensive detailing to provide items such as inlet and exhaust ducts, rotating turbine and compressor blades, and moveable control surfaces. The primary support structures used at Mainsite are foam columns, constructed of beaded polystyrene. The density of the material used is dependent upon the weight of the target to be supported, with the shape designed to minimize the return signature. These columns are then attached to the appropriate sized turntable. Cranes, manlifts, forklifts

and other heavy equipment are available on site for mounting of large and small targets. Typically, small, lightweight targets can be mounted to an accuracy of  $\pm 0.2$  degrees in roll and pitch. Large, heavy targets can be mounted with an accuracy of  $\pm 0.5$  to 1.0 degree in roll and pitch.

**RADAR TARGET SCATTER (RATSCAT) ADVANCED MEASUREMENTS (RAMS):** RAMS is a self-contained, secure test complex consisting of the Target Support facility, an 8900 foot paved shadow plane range, the Central Facility, and an office complex, situated at the base of the San Andres mountains 35 miles northwest of the NRTF Mainsite.

**THE TARGET SUPPORT FACILITY:** boasts machine shops, a large target preparation and storage hangar, and an underground silo. Monostatic RCS measurements of targets up to 70 feet in length can be made. Additionally, with the appropriate target rotator provided, the pylon can support target weights up to 30,000 pounds. This 95 foot target support pylon can be extended to 56 feet above the projected ground plane and retracted into a silo for visual security and for convenient target mounting and dismounting. In the secure, controlled access environment of the Target Support Facility, target mounting and preparation are facilitated by use of an overhead traveling bridge crane. A 105-foot pop-up calibration and field probe pylon is housed in an underground pit in front of the target support pylon on the extreme south end of the paved range. The Central Facility serves as the center of operations at RAMS. Within its 6000 sq. ft concrete block structure resides the radar equipment, the Command and Control Systems (CCS), computing resources, data storage vaults, personnel office space, and break rooms. All manner of classified material can be accommodated and the entire facility is equipped with 24-hour manned security presence.

**586TH FLIGHT TEST SQUADRON:** The 586th Flight Test Squadron (586 FLTS) performs flight tests of the most advanced aircraft systems in the world. The squadron has aircraft parking and administration facilities to provide a high level of security to its customers. It owns and operates three highly modified AT-38B aircraft equipped to support a wide variety of flight test operations. Capabilities of the squadron's AT-38Bs include: chaff, flares, GPS navigation and precision data recording and telemetry, ECM, Air Combat Maneuvering Instrumentation (ACMI) pods, and multiple format photographic coverage (including helmet-mounted video cameras). The squadron owns and operates a highly modified C-12J (Beech 1900 Airliner) with multiple antenna and pod configurations for guidance/navigation, avionics, and electronics testing. The 586 FLTS has access to both full-scale and sub-scale unmanned aerial targets as well as one of the world's most elaborate ground impact ranges. The 586th Flight Test Squadron is the world's leading authority on overland firings of the Air Force's primary medium range air-to-air missile (AMRAAM).

## **CENTER FOR COUNTERMEASURES APPENDIX:**

The Center for Countermeasures, operating under DoD Directive 5129.47, provides independent countermeasures/ counter-countermeasures (CM/CCM) analysis, test, and evaluation of both US and foreign precision guided weapons (PGWs), and CM systems for the entire DoD community. This includes systems involving electro-optical (EO), infrared (IR), and millimeter wave (MMW) technologies. The Center, although located at WSMR, is totally mobile, conducting CM/CCM test operations on a worldwide basis.

**METHODOLOGY:** The Center's methodology consists of testing supported by a judicious integration of analysis and simulation. Theoretical analysis is used to determine the potential CM susceptibilities of PGWs. Analysis results are then used to design field and laboratory tests that address system susceptibilities, focusing on potential problem areas, with resulting economies in test assets and time. Simulation is used before, during and after tests to simulate actual test scenarios and establish correlation between simulation and test results. Simulation of test scenarios that are too difficult or too expensive to test usually follows this procedure. The ultimate product consists of findings, conclusions and recommendations regarding CM that improve performance of specific or generic PGW systems.

**FUNCTIONAL AREAS:** The Center's expertise encompasses sources, sensors, and related hardware, as well as atmospheric propagation. Functional applications include PGW guidance and control systems, target Center for Countermeasures acquisition systems, threat warning systems, expendable CM systems, infrared signature measurements, and directed energy systems.

**FIELD INSTRUMENTATION AND EQUIPMENT:** The Mobile Instrumentation Facility (MIF) and the Operational Test and Evaluation Facility (OTEF) instrumentation vans are equipped with state-of-the-art PC-based network computers using COTS hardware and software. With these vans, data are collected and time-tagged at up to 500K samples per second. The results are real-time analog video data and near real-time digital video data. Report-quality analog/digital data in the form of high-resolution digital graphs or charts are also near real-time. The vans are deployable for use in practically all types of terrain and climatic environments.

**THE DIGITAL ENHANCED SEEKER VAN (DESV) AND IT'S KINETO TRACKING MOUNT (KTM):** are used to collect missile seeker data at 800 Kbits/sec. Equipped with high-end PC-based computers, it can simultaneously collect data from eight different types of seekers mounted on the KTM. The DESV can collect up to eight channels of data per seeker and data availability is near real-time. Seekers used are both domestic and foreign.

**REMOTE LAUNCHER SYSTEM:** The Center has three highly mobile Remote Launcher System (RLS) that are used in different types of configurations to remotely launch both domestic and RLS Missile Launcher foreign shoulder fired missiles. Each RLS is

equipped with time annotated video recording capabilities to capture events of the missile flight.

**JOINT MOBILE INFRARED COUNTERMEASURE TESTING SYSTEM (JMITS):** is a self-contained mobile unit designed to test aircraft countermeasures to MANPADS threats. The system consists of a tracking mount outfitted with missile simulator capable of transmitting threat representative UV and IR missile signatures. In addition the JMITS is accoutered with IR and UV radiometers, a static threat seeker suite, and an atmospheric measurement suite for characterizing atmospheric conditions. The Center has two JMITS units.

**PYROTECHNICS:** The Center's inventory includes various pyrotechnics such as smoke pots, smoke grenades, aircraft flares, training munitions, and unique heat sources. The Center also has access to the entire military inventory of pyrotechnics as required.

**FOG, SMOKE, AND FOAM GENERATORS:** Unique camouflage nets with visible, infrared, millimeter wave and suppressive characteristics are also available for the Center's CM field tests. Two of the Center's aircraft targets have been provided to WSMR Aerial Cable Range (ACR) for use in ACR tests.

**THE MILLIMETER WAVE ECM THREAT SIMULATOR (METS):** can employ 18 different Electronic Countermeasure (ECM) techniques using selectable millimeter wave frequency bands. This ECM capability includes nonresponsive, transponder, and repeater jamming techniques. The system has a detachable remotely controlled test bed and the controls and data collection functions are housed in an environmentally-controlled mobile van.

**SOURCES:** The Center uses many lasers and non-coherent sources in CM field tests. These lasers and noncoherent sources cover the spectrum from ultraviolet to far infrared. These lasers provide false target generation against laser guided PGW systems and non-destructive CM effects against threat warning systems and targeting systems. Most of the non-coherent sources are unique.

**LASER LABORATORY FACILITIES:** The Center maintains and operates approximately 100 lasers from the deep ultraviolet through the far-infrared spectrum. A variety of non-coherent sources of various wavelengths are in inventory. Calibration, diagnostic and repair equipment and instrumentation used to support laboratory and field testing are also maintained and operated.

**THE MILLIMETER WAVE LABORATORY (MMWL):** capabilities include collection of data on reflectivity, scattering, absorption, and penetration by MMW emissions. Active jamming and other types of countermeasure procedures are also used during laboratory and field testing.

**RADIOMETRIC SUPPORT:** The Center has developed a "world-class" radiometric instrumentation suite dedicated to signature characterization of a host of military assets

and threats. The sensor suite consists of a variety of 3 – 5 micron Fourier transform spectrometers (FTS) and an 8 - 12 micron FTS. The premier spectrometer is a custom-made ultra-violet/visible/infrared FTS. Spectroscopic analysis of gaseous emissions from combustion by-products includes investigations at the atomic and molecular level. The imager suite consists of several 3 - 5 micron imagers, an 8 - 12 micron imager, a dedicated 8 - 12 micron imager used for contrast tracking, a wide field-of view (FOV) visible scene imager and an extreme narrow FOV tri-focal imaging system. Meteorological data, including ozone concentrations, are recorded in-situ and can be input in near real-time to an advanced atmospheric transmittance/radiance model.

**INFORMATION SYSTEM (IS):** The CCN IS supports a modern client/server computer system providing digital/multimedia graphics analysis and end product production services.

**CLIENT/SERVER COMPUTER SERVICES:** Separate analyst workstations, as well as in the field laptop computer resources, support all CM testing and analysis efforts. The client/server system consists of 12 servers with a RAID 5 storage capacity of more than 87 gigabytes and server-to-workstation connectivity using a 100-Mb/sec switched packet Ethernet backbone. This system provides extremely fast turn around of the customer's final products.

**PRODUCTION SERVICES:** The Center provides the customer with fast turn around multimedia centered test result and analysis products. We have a state-of-the-art graphics production capability supported by color document reproduction and poster size color production (3 ft wide by 300 ft long). The Center is continually working towards a paperless environment as its reports are now presented to the customer in CD ROM format. The agency can also mass produce CD ROMs. Customer tests are also supported by analog and digital photographs and video that is incorporated into the customer's final product.

# MORALE, WELFARE AND RECREATION (MWR) APPENDIX:

**Roadrunner Lanes Bowling Center**  
Bldg 234  
575.678.3465  
**Bowling Hours**  
M-Th - 10 am - 10 pm  
F-Sa - 10 am - 12 midnight  
Su - 11 am - 6 pm  
**Snack Bar Hours**  
M-Th - 6:30 am - 9 pm  
F - 6:30 am - 11 pm  
Sa - 10:30 am - 11 pm  
Su - 11 am - 6 pm  
**Spartetime Lounge Hours**  
M-Th - 3 pm - 10 pm  
F-Sa - 3 pm - 12 midnight  
Su - 12 noon - 6 pm  
Thanksgiving, Christmas & New Years - Closed

**Frontier Club**  
Bldg 1330  
575.678.2055  
**Breakfast Hours**  
M-Su - 6:30 - 9 am  
**Lunch Hours**  
M-Su - 11 am - 1 pm  
**Dinner Hours**  
M-Su - 4:30 - 7:30 pm  
**Bar Hours**  
Th - 4 - 10 pm  
F - 4 - 11 pm

**Italian Cafe**  
Bldg 460  
575.678.0544  
M-Sa - 11 am - 7:30 pm  
Sundays Pizza & Subs  
12 noon - 5 pm



The Morale, Welfare and Recreation (MWR) organization would like to welcome you to our community. MWR offers a wide variety of recreational activities, hobby opportunities, innovative events and social gathering for the White Sands community. If you enjoy golf, bowling, or skeet shooting... MWR can help you. MWR also offers top quality child care and youth programs, discount tickets to area attractions, arts & craft classes and much, much more!!




**MWR PURPOSE:**

MWR is committed to providing support and leisure services that are as outstanding as the people that we serve. We believe that Soldiers and their Families deserve the same quality of life as the are pledged to defend.

MWR encourages the healthy balance of work and leisure that Soldiers need, by delivering state of the art facilities, community event tickets, holiday functions, competitive and recreational sports, family support services and much much more!

www.wsmrmwr.com

**More Information, Event & Activity Schedules**  
www.wsmrmwr.com




WHITE SANDS MISSILE RANGE

**MWR**  
FAMILY, MORALE, WELFARE, RECREATION

Hours Of Operation  
Phone Numbers





**Information, Ticketing & Registration (ITR)**  
Bldg 460  
575.678.4134  
M-F - 9 am - 5 pm  
Sa-Su, Holidays Closed

**Better Opportunity for Single Soldiers (BOSS)**  
Bldg 501, Rm 5  
575.678.1256  
M-F - 7:30 am - 4:30 pm

**Army Community Service**  
Bldg 250  
575.678.6767  
M-Tu - 7:30 am - 4:30 pm  
Th-F - 7:30 am - 4:30 pm  
W - 11 am - 4:30 pm  
Sa-Su, Holidays Closed

**Army Lodging**  
Bldg 501  
575.678.4559  
M-F - 7 am - 6 pm  
Sa-Su - 11:30 am-3 pm

**Arts & Crafts**  
Bldg 426  
575.678.5321  
W-F - 11 am - 8 pm  
Sa-Su - 9:30 am - 5 pm  
M-Tu, Holidays - Closed

**Aquatics Center**  
Bldg 462  
575.678.1068  
M-Su - 10:30 am - 7pm For  
*PHYSICAL TRAINING (PT)*  
M-F - 5:30 - 10:00  
Thanksgiving, Christmas & New Years - Closed

**Sports & Fitness**  
Bldg 236  
575.678.3374  
M-F - 5:30 am - 8 pm  
Sa-Su, Holidays 9 am-6pm  
Thanksgiving, Christmas & New Years - Closed

**Auto Skills**  
Bldg 1430  
575.678.5800  
Tu-Th - 8 am - 5 pm  
F - 12 noon - 9 pm  
Sa-Su - 8 am - 5 pm  
M, Holidays - Closed  
Last W of Month - Closed

**Community Center**  
Bldg 460  
575.678.4134  
M-F - 8 am - 9 pm  
Sa - 10 am - 9 pm  
Su - 12 noon - 6 pm  
Holidays - 12 noon - 6 pm

**Outdoor Recreation**  
Bldg 445  
575.678.1713  
M-F - 9 am - 5 pm

**Golf Course**  
Bldg 1330  
575.678.1759  
Tu-F - 8 am - 7 pm  
Sa-Su - 7 am - 7 pm  
M - Closed  
Winter  
Closed at 5pm

**CHILD & YOUTH SERVICES (CYS)**  
Central Registry - Family Child Care  
School Liason Office - Bldg 501 - 2nd Floor  
575.678.2441  
M-F - 6:00 am - 4:30 pm  
Sa-Su, Holidays - Closed

**Child Development Services - Bldg 272**  
575.678.2059  
M-F - 5:30 am - 6 pm  
Sa-Su, Holidays - Closed

**School Age Services - Bldg 1316**  
575.678.4140  
Office Hours - M-F - 7 am - 5 pm  
School Year Hours  
M-F - 5:30 am - 8 am & 3 pm - 6 pm  
Sa - 2 pm - 8 pm  
Summer & School Holidays  
M-F - 5:30 am - 6 pm  
Sa - 2 pm - 8 pm  
Federal Holidays - Closed

**Middle School & Teen Program - Bldg 1316**  
575.678.4140  
Office Hours - M-F - 7 am - 5 pm  
School Year Hours  
M-Th - 5:30 am - 8 am & 3 pm - 8 pm  
F - 5:30 am - 8 am & 3 pm - 10 pm  
Sa - 2 pm - 10 pm  
Summer & School Holidays  
M-Th - 1 pm - 8 pm  
F - 1 pm - 10 pm  
Sa - 2 pm - 10 pm  
MTS Summer Quest camps M-F 5:30 am - 1 pm  
Federal Holidays - Closed

**YS Technology Center**  
M-Sa - 2:30 pm - 7 pm

**FOR ALL YOUR LIFE**

**Who is MWR for?**

MWR is for the entire military population, including Active Duty, Reserve, National Guard, Retirees, DoD Employers, Contractors, their Spouses and Families.

MWR in history began on the battlefields of World War I, where behind the lines, Salvation Army sisters and Red Cross volunteers ministered to the needs of soldiers as the forerunners of today's morale, welfare and recreation specialists.



# References



- *ADSS VDL Training Manual*
- *Command Briefing 2008*
- *Document 501-08: Universal Documentation System*, January 2008; Prepared by Range Operations Group Range Commanders Council; Published by Secretariat Range Commanders Council, White Sands Missile Range, New Mexico, 88002-5110
- *DTC PAM 73-1 and Appendix* April 2006
- *FDO SOP* January 2008
- *Holloman Air Force Base High Speed Test Track Facilities and Capabilities Book*, September 2006
- *Memorandum, Access Control Procedures* May 2007
- *Memorandum of Instruction – Non DoD Customer Accounts Charge Rates* October 2007
- *NEPA Process Guide* March 2002
- *Newcomer's Brief* May 2006
- *Optics Capabilities Document*
- *Process Guidance for Customer Test Service Inquiries - and - Test Service Proposal Transition to Execution*, September 2006, White Sands Missile Range, Material Test (MT) Directorate, Business Development Office (BDO)
- *WSMR 10 Series* October 2005
- *WSMR HAZCOM Program Document* February 2008
- WSMR Public Affairs Office, Visual Information, and Range Optics images
- *WSMR Reg 73-1 Customer Proposals*
- *WST 385-1 Policy for Training Conducted on White Sands Missile Range (WSMR)*



# Notes



**SPECIAL THANKS:** Special thanks to the Executive Development Class of 2007 for their initial research of materials for the handbook.

**SPECIAL NOTE:** The citation of trade names and names of manufacturers in this document is not to be interpreted as official Government endorsement or approval of commercial products or services.

The policies, procedures and guidelines described in this handbook are subject to change without notice.

## **CUSTOMER COMMENTS:**

Send comments on this handbook to:

Business Development Office

US Army White Sands Missile Range

ATTN: TEDT-WS-CSPB (Margaret Tyree)

White Sands Missile Range, New Mexico 88002

TeamWhiteSands@us.army.mil

Phone: (866) 532-9767

Fax: (575) 678-5010



# Acronyms



---

3-D	Three Dimensional
4DWX	Four Dimensional Weather Modeling
4-H	Head, Heart, Hands, Health
586 FLTS	586th Flight Test Squadron
746TS	746th Test Squadron
<b>AAFES</b>	Army and Air Force Exchange Service
AAR	After Action Report
ABL	Airborne Laser
ABRES	Advanced Ballistic Reentry System
ACMI	Air Combat Maneuvering Instrumentation
ACOE	Army Communities of Excellence
ACR	Aerial Cable Range
ADIU	Advanced Digital Interface Unit
ADSS	ATEC Decision Support System
AETF	Army Evaluation Task Force
AF	Air Force
AF	Air Force
AFATDS	Army Field Artillery Tactical Data System
AFC	Area Frequency Coordinator
AFR	Air Force Regulation
AFRL	Air Force Research Laboratory
AGL	Above Ground Level
AH-1	Cobra Attack Helicopter
AH-64	Apache Attack Helicopter
AIM	Abrams Integrated Management M1A1 Tank
AIM	Air Intercept Missile
ALTS	Aided Laser Tracking System
A-MANPADS	Advanced Man-Portable Air Defense Systems
AMRAAM	Advanced Medium Range Air-to-Air Missile
AN/ARQ	Airborne Radio Multipurpose Special Equipment GPS Instrumentation Pod
AN/FPS	Army Navy Fixed Pulsed System
AN/MPS	Army Navy Mobile Pulsed System
AR	Army Regulations
ARAV	Aegis Readiness Assessment Vehicle
arcsec	Arc Second
ARDS	Advanced Range Data System
ARL	Army Research Laboratory
ARTCC	Albuquerque Air Route Traffic Center
ASP	Ammunition Storage Point, Ammunition Supply Point
ASROC	Antisubmarine Rocket
ASTM	American Society for Testing Materials
ASWR	Attack, Sense, Warning, and Response
AT-38	Talon Advanced Trainer Aircraft
AT-38B	Holloman Talon Aggressor Trainer Aircraft
ATACMS	Army Tactical Missile System

ATC	Air Traffic Control
ATEC	Army Test and Evaluation Command
ATIN	ATEC Test Integration Network
ATO	Approval to Operate
AV-8B	Harrier Marine Corps Aircraft
AVI	Audio Video Interleave
<b>B-52</b>	Strato-Fortress Bomber Aircraft
BAT PAS	Brilliant Anti-Tank Precision Acquisition System
BCT	Brigade Combat Team
BD	Business Development
BDO	Business Development Office
BE	Battlefield Environment
BEAR	Basic Expeditionary Airfield Resources
BLOS	Beyond Line-of-Sight
BQM-34	Firebee Target Drone Aircraft
BRTV	Battlespace Real-time Video
BTA	Beam Transfer Area
<b>C &amp; L</b>	Capabilities and Limitations
C(A)	Coarse Acquisition
C-12	Huron Transport Aircraft
C-12J	Beech 1900 Airliner Transport Aircraft
C-17	Globemaster III Transport Aircraft
C2V	Command and Control Vehicle
C4ISR	Command & Control, Communications, Computers, Intelligence, Surveillance and Reconnaissance
C-5A	Galaxy Transport Aircraft
CAAM	Computer Aided Artillery Met
CaF2:Mn	Calcium Fluoride Manganese
Cal ID	Calibration Identification
cal/cm <sup>2</sup>	Calories Per Square Centimeter
C-Band	Frequency from 8 to 4 GHz or 3.75 to 7.5 cm wavelength
CBRNE	Chemical, Biological, Radiation, Nuclear and Explosive
CCM	Center for Countermeasures
CCS	Command and Control Systems
CCTV	Closed Circuit Television
CD	Compact Disk
CD ROM	CD Read Only Memory
CHAPS	CIGTF High Accuracy Post-Processing System
CHS-2	Common Hardware Software 2
ChuSam	CHU Surface to Air Missile
CIGTF	Central Inertial Guidance Test Facility
CISD	Computational & Information Sciences Directorate
CJCSI	Chairmen, Joint Chiefs of Staff Instruction
Class A1	Official government organizations
Class A2	Official government organization contractors
CM/CCM	Countermeasures/ Counter Countermeasures
CO2	Carbon Dioxide
COE	Center of Expertise
CONOPS	Concept of Operations
CONUS	Continental United States
COP	Common Operating Picture
COTS	Cost Off the Shelf
CRCC	Cox Range Control Center
CW	Continuous Wave
<b>DA</b>	Department of the Army
DAA	Designated Approval Authority
dB	Decibel
DCP	Data Collection Point
DE	Directed Energy

DESV	Digital Enhanced Seeker Van
Det 1 46th TG	Air Force 46th Test Group Detachment 1
DFCS	Drone Formation Control System
DGT	Digital Frequency Translator
DHS	Department of Homeland Security
DISN/DDN	Defense Information Systems Network/ Defense Data Network
DISR	DoD Information Technology Standards Registry
DITSCAP	DoD Information Assurance Certificate and Accreditation Process (DIACAP supersedes)
DLGS	Data Link Ground System
DLT	Data Link Transceiver
DOAMS	Distant Object Attitude Measurement System
DoD	Department of Defense
DoDD	Department of Defense Directive
DoDI	DoD Instruction
DOF	Degrees of Freedom
DOPA	Description of Proposed Action
DREN	Defense Research and Engineering Network
DRF	Data Reduction Facility
DS	Data Sciences Directorate
DSL	Digital Subscriber Line
DSN	Defense Switched Network, Digital Switched Network
DT	Distributed Testing
DTC	Developmental Test Command
DTCC	Distributed Test Control Center
DTCS	Drone Target Control System
DTRA	Defense Threat Reduction Agency
DVD	Digital Versatile Disk (formerly Digital Video Disk)

<b>E3</b>	Electromagnetic environmental effects (E <sup>3</sup> )
ECM	Electronic Counter Measures
EDP	Excessive Deficit Procedure
EDX	Energy Dispersive X-ray
EIS	Environmental Impact Statement
EMC	Electro Magnetic Charge
EMCON	Electromagnetic Emission Control
EMFAV	Electromagnetic Vulnerability Assessment Facility
EMI	Electro Magnetic Interference
EMP	Electro Magnetic Pulse
EMR	Electromagnetic Radiation
EMRH	Electromagnetic Hazard
EMRO	Electromagnetic Operational
EO	Electro-Optical
EO/IR	Electro-Optical/ Infrared
EOCM	Electro-Optical Countermeasures
EOCMFS	Electro-Optical Countermeasures Missile Flight Simulator
EOD	Explosive Ordnance Disposal
EOVAF	Electro-Optical Vulnerability Assessment Facility
EPA	Environmental Protection Agency
ERGM	Extended Range Gun Munitions
ERMP	Extended Range Multi-Purpose
ESD	Electrostatic Discharge
ETA	Effects Test Area
ETA-II	Environmental Test Area II
EW	Electronic Warfare
EXSUM	Executive Summaries

<b>F-14</b>	Tomcat Fighter Aircraft
F-15	Eagle Fighter Aircraft
F-16	Fighting Falcon Fighter Aircraft
F-18	Hornet Fighter Aircraft
F-4	Phantom Fighter Aircraft

FAA	Federal Aviation Agency
FAD	Force Activity Designator
FBR	Fast Burst Reactor
FCS	Future Combat Systems
FDO	Foreign Disclosure Office
FFT	Fast Fourier Transform
FLM	Focused Lethality Munition
FM	Frequency Modulation
FM	Field Manual
FMECA	Failure Modes, Effects, and Critical Analysis
FMMS	Field Mobile Measurement System
FMS	Foreign Military Sales
FMS	Flight Management System
FOUO	For Official Use Only
FOV	Field of View
FRMV	Future Combat Systems Recovery and Maintenance Vehicle
FSO	Flight Safety Officer
FSTE	Fiber Site Terminating Equipment
Ft	Feet
Ft/sec	Feet per Second
FTP	File Transfer Protocol
FTS	Flight Termination System
FTS	Fourier Transform Spectrometers
FW	Fighter Wing
<b>G &amp; A</b>	
GALIX	General and Accounting
GBAD	French counter measure system using smoke or aerosol grenade
GBAD	Ground Based Auto Destruct
Gbps	Gigabyte per Second
GCS	Ground Control Station
GEM	Graphite-Epoxy
GHz	GigaHertz
GIG	Global Information Grid
GIG-ES	GIG - Enterprise Services
GIS	Geographic Information Systems
GMLRS	Guided MLRS
GMT	Greenwich Mean Time
GPS	Global Positioning System
GR1	Tornado Royal Air Force (RAF) Aircraft
GRF	Gamma Radiation Facility
GS	Government Series
Gs	Gigaseconds
GTP	Ground Based Translator Processing System
GWOT	Global War On Terrorism
<b>HAFB</b>	
HAIPE	Holloman Air Force Base
HAZCOM	High Assurance Internet Protocol Encryptor
HAZCOM	Hazardous Communication
HD	High Definition
HELSTF	High Energy Laser Systems Test Facility
HERF	Hazards of Electromagnetic Radiation to Fuel
HERO	Hazards of Electromagnetic Radiation to Ordnance
HERP	Hazards of Electromagnetic Radiation to Personnel
HF/DF	Hydrogen Fluoride/ Deuterium Fluoride
HFE	Human Factors Engineering
HM	Hazardous Material
HMARS	High Mobility Artillery Rocket System
HMMWV	High Mobility Multipurpose Wheeled Vehicle
HPM	High Powered Microwave
HQDA	Headquarters, Department of Army
HSDV	High Speed Digital Video
HSTT	Holloman High Speed Test Track

HTA	Hazardous Test Area
HVC	Human Use Committee
HWIL	Hardware in the Loop
<b>I &amp; Q</b>	In-Phase and Quadrature
IA	Information Assurance
IATO	Interim Approval to Operate
IAW	In Accordance With
ICBM	Intercontinental Ballistic Missile
ICV	Infantry Combat Vehicle
IF	Intermediate Frequency
IH	Industrial Hygiene
IIP	Instantaneous Impact Predictor
ILS	Integrated Logistics Support
IMBC	Improved Mortar Ballistic Computer
IMETS	Integrated Meteorological System
IMU	Inertial Measurement Unit
INS	Inertial Navigation System
IO Lab	Information Operations Laboratory
IP	Internet Protocol
IR	Infra-Red
IRCC	Integrated Range Control Center
IRCC	Inter-Range Control Center
IRIG	Inter Range Instrumentation Group
IRSP	Instrumentation Radar Support Program
IS	Information System
IT	Information Technology
ITAM	Integrated Training (and Testing) Area Management Program
ITO	Invitational Travel Orders
ITOP	International Test Operations
ITR	Information, Ticketing, and Registration
IV & V	Independent Verification and Validation
IWEDA	Integrated Weather Effects Decision Aid
<b>JASSM</b>	Joint Air-to-Surface Standoff Missile
JCIET02	Joint Combat Identification Evaluation Team Single Integrated Air Picture (SIAP) Event 2002
JDAM	Joint Direct Attack Munitions
JDETS	Joint Directed Energy Test Site
JFK	John Fitzgerald Kennedy
JITC	Joint Interoperability Test Command
JMITS	Joint Mobile Infrared Countermeasure Testing System
JTAGS	Joint Tactical Ground Station
<b>KFt</b>	Kilo Feet
KG	Encryption
KIP	Key Interface Profile
kJ	Kilo Joule
Km	Kilometer
km	Kilo Meter
KPP	Key Performance Parameter
kRad	Kilo Rad
KTM	Kineto Tracking Mount
kV	Kilo Volt
<b>LAN</b>	Local Area Network
LATS	Launch Area Theodolite Systems
LC	Launch Complex
LC-34	Launch Complex 34
LC-35E	Launch Complex 35 East
LC-35N	Launch Complex 35 North
LC-35W	Launch Complex 35 West

LC-36	Launch Complex 36
LDD	Laser Demonstration Device
LINAC	Linear Electron Accelerator
LMA	Lightning Map Array
LNO	Liaison Officer
LOA	Letters of Agreement
LOS	Line of Sight
LTC	Large Test Chamber
LTC	Lieutenant Colonel
LTF	Lightning Test Facility
LVC	Large Vacuum Chamber
LVC	Live, Virtual and Constructive

<b>m</b>	Meter
M & S	Modeling and Simulation
M4	Model 4
MAF	Missile Assembly Facility
MANPADS	Man-Portable Air Defense System
MANPRINT	Manpower and Personnel Integration
MATS	Multimode Automatic Tracking Systems
Mb	Mega Bytes
Mb/s	Mega Bytes per Second
MCO	Marine Corps Orders
MCS	Mounted Combat System
Met	Meteorology
METL	Mission-Essential Task List
MeV	Mega Electron Volt
MGV	Manned Ground Vehicle
MHz	Mega Hertz
MIJI	Meaconing, Intrusion, Jamming, or Interference
MIL-STD	Military Standards
MIRACL	Mid-Infrared Advanced Chemical Laser
MIRT	Mobile Infrared Telescope
MK	Mark
MLK	Martin Luther King
MLRS	Multiple Launch Rocket System
MMS	Mobile Profiler Proof of Concept Measurement System
MOA	Military Operating Areas
MOTR	Multiple Object Tracking Radars
MP	Microsoft Project
MPARS	Mission Playback Analysis and Reporting System
Mph	Miles per Hour
MQM-107	Beechcraft Streaker Target Drone Aircraft
MRGS	Master/Remote Ground Station
MRTFB	Major Range and Test Facility Base
MSDS	Material Safety Data Sheet
MSL	Mean Sea Level
MSP	Minimum Support Plan
MT	Materiel Test Directorate
MTS	Mobile Telemetry System
MTV	Mobile Telemetry Van
MTV	Mobile Television Van
MULE	Multifunction Utility/Logistics and Equipment Vehicle
MV-E	Medical Vehicle – Evacuation
MV-T	Medical Vehicle – Treatment
MW	Mega Watt
MWR	Morale, Welfare and Recreation
n/cm <sup>2</sup>	Neutrons per Square Centimeter

<b>NASA</b>	National Aeronautics and Space Administration
<b>NATO</b>	North Atlantic Treaty Organization

NAVTEL	Navigation Test and Evaluation Laboratory
NCOW RM	Net-Centric Operations and Warfare Reference Model
NDL	Nuclear Dosimetry Laboratory
NELAP	National Environmental Laboratory Accreditation Program
NEPA	National Environmental Policy Act
NetOps	Network Operations
NGIA	National Geospatial Intelligence Agency
NIMA	National Imagery and Mapping Agency
NIST	National Institute of Standards and Technology
NLOS	Non-Line-of-Sight
NLOS-C	Non-Line-of-Sight Cannon
NLOS-LS	Non-Line-of-Sight Launch System
NLOS-M	Non-Line-of-Sight Mortar
NLT	Not Later Than
NM	New Mexico
NM <sup>2</sup>	Nautical Miles Squared
NMD-GBR-P	National Missile Defense - Ground Based Radar – Prototype
NR-KPP	NetReady – KPP
NRTF	National Radar Cross Section Test Facility
NRZ-L	Non-Return to Zero Level
ns	Nano Second
NSSM	NATO Seasparrow Missile
NTDIS	Non-Track Digital Instrumentation System
NTIA	National Telecommunications and Information Administration
NW	Northwest
<b>OIC</b>	Operational Incident Commander
OLTC	Open-Loop Tracking Complex
OMF	Optical Maintenance Facility
OOCs	Object Oriented Coordinate System
OOTW	Operations Other Than War
OPNAVINST	Operational Navy Instruction
OR	Operational Requirements
ORCA	Optics Remote Control and Acquisition
OTEF	Operational Test and Evaluation Facility
<b>P(Y)</b>	Precision Code Encrypted
PAC-3	PATRIOT Advanced Capability 3 Missile
PAM	Precision Attack Missile
PAM	Pamphlet
PATRIOT	Phased Array Tracking to Intercept of Target
PBX	Private Branch Exchange
PC	Personal Computer
PCM	Pulse-Code Modulation
PEO STRI	Program Executive Office Simulation, Training, and Instrumentation
PFJS	Portable Field Jamming System
PFS	Project Facility Station
PGW	Precision Guided Weapon
PHDNSWC - WS	Port Hueneme Division Naval Surface Warfare Center Detachment White Sands
PI	Program Introduction
ROM	Rough Order of Magnitude
PLVTS	Pulsed Laser Vulnerability Test System
PM-NV/RSTA	Project Manager – Night Vision/ Reconnaissance, Surveillance, and Target Acquisition
PNG	Portable Network Graphics
POC	Point-of-Contact
PPS	Packets per Second
PPS	Pulses per Second
PRAT	Project Review and Assignment Team
PT	Physical Training
PX	Post Exchange

QASAS	Quality Assurance Specialist Ammunition Surveillance
QF-100	Super Saber Target Drone
QF-106	Delta Dart Target Drone
QF-4	Phantom Air Force Drone Aircraft
QoS	Quality of Service
<b>R &amp; D</b>	Research and Development
Rad	Radiation Absorbed Dose
RADS	Radar Acquisition Display System
RAID	Redundant Array of Inexpensive Disks
RAJPO	Range Applications Joint Program Office
RAM	Reliability, Availability and Maintainability
RAM	Rolling Airframe Missile
RAMS	RATSCAT Advanced Measurement System
RATSCAT	Radar Target Scatter
RCC	Range Commanders Council
RCCF PAS	Range Control Center Facility Precision Acquisition System
RCS	Radar Cross Section
RDAS	Remote Data Acquisition System
RDT&E	Research, Development, Test and Evaluation
RDTPS	Real time Data Processing System
REBA	Relativistic Electron Beam Accelerator
REG	Regulation
REM	Range Encryption Module
RF	Radio Frequency
RFA	Radio Frequency Authorization
RFCM	Radio Frequency Countermeasure
RFP	Request for Proposal
RFTS	Requests for Test Services
RICS	Remote Instrument Control System
RLS	Remote Launcher System
RO	Range Engineer
RO	Range Operations Directorate
ROC	Record of Environmental Consideration
RRV	Relay and Recording Van
RSO	Range Safety Officer
RSV	Reconnaissance and Surveillance Vehicle
RTCA	Real-time Casualty Assessment
RTDPS	Real-time Data Processing System
RTFDDA	Real-time Four-Dimensional Data Assimilation
RTO	Responsible Test Organization
RWP	Radar Wind Profiler
<b>SAMS</b>	Surface Automated Measurement System
SAR	Safety Assessment Report
S-band	Frequency from 4 to 2 GHz or 7.5 to 15 cm wavelength
SCI	Sensitive Compartmented Information
SD	Standard Definition
SDB	Small Diameter Bomb
SDI	Standard Definition Interface
SE	Systems Engineering Directorate
SE	SouthEast
SEM	Scanning Electron Microscopy
SFAF	Standard Frequency Action Format
Si	Silicon
SIPRNET	Secret Internet Protocol Router Network
SLA	Service Level Agreement
SLAD	Survivability/Lethality Analysis Directorate
SLBD	Sea Lite Beam Director
SLV	Survivability, Lethality and Vulnerability
SM	STANDARD Missile

SM/SSM	Smart Munitions/Smart Submunitions
SMART-IP	Smart Impact Prediction System
SMD	Surface Miss Distance
SOC or SC	Statement of Capability
SOMTE	Soldier, Operator, Maintainer, Test and Evaluation
SOP	Standard Operating Procedure
SOQPSK	Shaped Offset Quadrature Phase-Shift Keying
SOSI	System-of-systems integration
SPAN	Security Policy Automation Network
Squirt Site	LC-37 Advanced Gun Munitions Test Site
SSCS	Selected Stationary Coordinate System
SSOP	Safety SOP
STC	Small Test Chamber
STDC	SANDS Technical Data Center
STEP	Software Test and Evaluation Panel
STEWS-NR-P	White Sands - National Range – Projects
STL	Semiconductor Test Laboratory
STS	Space Transportation System
STTF	Solar Thermal Test Facility
SUGV	Small Unmanned Ground Vehicle
SV	Survivability, Vulnerability & Assessment Directorate
SVDLS	Secure VDLS
T & E	Test and Evaluation
T-38	Talon Trainer Aircraft
TACAN	Tactical Air Navigation
TARS	Telemetry Acquisition and Relay System
TB Med	Medical Technical Bulletin
TC	Training Circular
TCLP	Toxicity Characteristic Leaching Procedure
TCP	Transmission Control Protocol
TDC	Telemetry Data Center
TDM	Time-Division Multiplexed
TECC	Test Environment Certification Complex
TEDT-WS-CSP-B	White Sands Missile Range, Plans and Operations, Business Development Office
TEDT-WST-DSSTR	White Sands Range Frequency Management Office
TEMP	T & E Master Plan
TGRS	Translated GPS Ranging System
TGTD	Test Group Test Directorate
THAADS	Terminal High Altitude Area Defense System
TIR	Test Incident Report
TLD	Thermo-Luminescent Dosimeter
TM	Telemetry
TMA	Time of Minimum Approach
TMR	Target Motion Resolution
TO	Test Officer
TOP	Test Operation Procedure
TRA	Training Readiness Authority
TRAC	Training and Doctrine Command Requirements Analysis Center
TRACS	Transportable Range Augmentation and Control System
TRADOC	Training and Doctrine Command
TREE	Transient Radiation Effects on Electronics
TSARC	Test Schedule and Review Committee
TSN	Test Support Network
TSN-IP	Test Support Network - Internet Protocol
TSPI	Time Space Position Information
TTARS	Transportable Telemetry Acquisition and Relay System
TTAS	Telemetry Acquisition Systems
TTF	Temperature Test Facility
TTS	Transportable Telemetry System

<b>UAS</b>	Unmanned Aerial Systems
UAV	Unmanned Aerial Vehicles
UDP	User Datagram Protocol
UDS	Universal Documentation System
UE	User Equipment
UGS	Unmanned Ground Systems
UGV	Unmanned Ground Vehicles
UH-1	Huey Multipurpose Helicopter
UHF	Ultra High Frequency
UPS	Universal Power Supply
US	United States
USAG	US Army Garrison
USAG-DPTMS	USAG - Directorate Plans, Training, Mobility, Security
USMC	United States Marine Corp
USPO	United States Post Office
UTS	Universal Time Standard
UV	Ultra Violet
UXO	Unexploded Ordnance
<b>V-2</b>	Vengeance (Vergeltungswaffe) Rocket
V-angle	Vertical Angle
VC	Vibration Control
VDC	Volts Direct Current
VDL	VISION Digital Library
VDLS	VISION Digital Library System
VHF	Very High Frequency
VHS	Video Home System
VI	Visual Information
VICS	Video Instrument Control System
VIP	Very Important Person
VISION	Video Indexing For Searching Over Networks
VISOR	Virtually Integrated System for Optical Replay
VLA	Vertical Launch ASROC
VPN	Virtual Private Network
VTC	Video Teleconference
VTM	Versatile Tracking Mount
<b>WC-50</b>	West Center 50
WD	Work Days
WF	Wind Finder
WGS	World Geodetic System
WITs	Warhead Impact Target
WSDM	White Sands Data Management
WSMR	White Sands Missile Range
WSMRR	WSMR Regulation
WSNM	White Sands National Monument
WSSH	White Sands Space Harbor
WSTC	White Sands Test Center
WSTF	White Sands Test Facility
<b>X-Band</b>	Frequency from 7 to 12.5 GHz or 2.5 to 4 cm wavelength
$\mu$ s	Micro Second

# Reverse Acronyms



586th Flight Test Squadron  
746th Test Squadron

586 FLTS  
746TS

Above Ground Level

AGL

Abrams Integrated Management M1A1 Tank

AIM

Advanced Ballistic Reentry System

ABRES

Advanced Digital Interface Unit

ADIU

Advanced Man-Portable Air Defense Systems

A-MANPADS

Advanced Medium Range Air-to-Air Missile

AMRAAM

Advanced Range Data System

ARDS

Aegis Readiness Assessment Vehicle

ARAV

Aerial Cable Range

ACR

After Action Report

AAR

Aided Laser Tracking System

ALTS

Air Combat Maneuvering Instrumentation

ACMI

Air Force

AF

Air Force 46th Test Group Detachment 1

Det 1 46th TG

Air Force Regulation

AFR

Air Force Research Laboratory

AFRL

Air Intercept Missile

AIM

Air Traffic Control

ATC

Airborne Laser

ABL

Airborne Radio Multipurpose Special Equipment GPS Instrumentation Pod

AN/ARQ

Albuquerque Air Route Traffic Center

ARTCC

American Society for Testing Materials

ASTM

Ammunition Storage Point, Ammunition Supply Point

ASP

Antisubmarine Rocket

ASROC

Apache Attack Helicopter

AH-64

Approval to Operate

ATO

Arc Second

arcsec

Area Frequency Coordinator

AFC

Army and Air Force Exchange Service

AAFES

Army Communities of Excellence

ACOE

Army Evaluation Task Force

AETF

Army Field Artillery Tactical Data System

AFATDS

Army Navy Fixed Pulsed System

AN/FPS

Army Navy Mobile Pulsed System

AN/MPS

Army Regulations

AR

Army Research Laboratory

ARL

Army Tactical Missile System

ATACMS

Army Test and Evaluation Command

ATEC

ATEC Decision Support System	ADSS
ATEC Test Integration Network	ATIN
Attack, Sense, Warning, and Response	ASWR
Audio Video Interleave	AVI
<b>Basic Expeditionary Airfield Resources</b>	BEAR
Battlefield Environment	BE
Battlespace Real-time Video	BRTV
Beam Transfer Area	BTA
Beech 1900 Airliner Transport Aircraft	C-12J
Beechcraft Streaker Target Drone Aircraft	MQM-107
Beyond Line-of-Sight	BLOS
Brigade Combat Team	BCT
Brilliant Anti-Tank Precision Acquisition System	BAT PAS
Business Development	BD
Business Development Office	BDO
<b>Calcium Fluoride Manganese</b>	CaF2:Mn
Calibration Identification	Cal ID
Calories per Square Centimeter	cal/cm <sup>2</sup>
Capabilities and Limitations	C & L
Carbon Dioxide	CO2
CD Read Only Memory	CD ROM
Center for Countermeasures	CCM
Center of Expertise	COE
Central Inertial Guidance Test Facility	CIGTF
Chairmen, Joint Chiefs of Staff Instruction	CJCSI
Chemical, Biological, Radiation, Nuclear and Explosive	CBRNE
CHU Surface to Air Missile	ChuSam
CIGTF High Accuracy Post-Processing System	CHAPS
Closed Circuit Television	CCTV
Coarse Acquisition	C(A)
Cobra Attack Helicopter	AH-1
Command & Control, Communications, Computers, Intelligence, Surveillance & Reconnaissance	C4ISR
Command and Control Systems	CCS
Command and Control Vehicle	C2V
Common Hardware Software 2	CHS-2
Common Operating Picture	COP
Compact Disk	CD
Computational & Information Sciences Directorate	CISD
Computer Aided Artillery Met	CAAM
Concept of Operations	CONOPS
Continental United States	CONUS
Continuous Wave	CW
Cost Off the Shelf	COTS
Countermeasures/ Counter Countermeasures	CM/CCM
Cox Range Control Center	CRCC
<b>Data Collection Point</b>	DCP
Data Link Ground System	DLGS
Data Link Transceiver	DLT
Data Reduction Facility	DRF
Data Sciences Directorate	DS
Decibel	dB
Defense Information Systems Network/ Defense Data Network	DISN/DDN

Defense Research and Engineering Network	DREN
Defense Switched Network, Digital Switched Network	DSN
Defense Threat Reduction Agency	DTRA
Degrees of Freedom	DOF
Delta Dart Target Drone	QF-106
Department of Defense	DoD
Department of Defense Directive	DoDD
Department of Homeland Security	DHS
Department of the Army	DA
Description of Proposed Action	DOPA
Designated Approval Authority	DAA
Developmental Test Command	DTC
Digital Enhanced Seeker Van	DESV
Digital Frequency Translator	DGT
Digital Subscriber Line	DSL
Digital Versatile Disk (formerly Digital Video Disk)	DVD
Directed Energy	DE
Distant Object Attitude Measurement System	DOAMS
Distributed Test Control Center	DTCC
Distributed Testing	DT
DoD Information Assurance Certificate and Accreditation Process (DIACAP supersedes)	DITSCAP
DoD Information Technology Standards Registry	DISR
DoD Instruction	DoDI
Drone Formation Control System	DFCS
Drone Target Control System	DTCS
<b>Eagle Fighter Aircraft</b>	<b>F-15</b>
Effects Test Area	ETA
Electro Magnetic Charge	EMC
Electro Magnetic Interference	EMI
Electro Magnetic Pulse	EMP
Electromagnetic Emission Control	EMCON
Electromagnetic Environmental Effects (E <sup>3</sup> )	E3
Electromagnetic Hazard	EMRH
Electromagnetic Operational	EMRO
Electromagnetic Radiation	EMR
Electromagnetic Vulnerability Assessment Facility	EMFAV
Electronic Counter Measures	ECM
Electronic Warfare	EW
Electro-Optical	EO
Electro-Optical Countermeasures	EOCM
Electro-Optical Countermeasures Missile Flight Simulator	EOCMFS
Electro-Optical Vulnerability Assessment Facility	EOVAF
Electro-Optical/ Infrared	EO/IR
Electrostatic Discharge	ESD
Encryption	KG
Energy Dispersive X-ray	EDX
Environmental Impact Statement	EIS
Environmental Protection Agency	EPA
Environmental Test Area II	ETA-II
Excessive Deficit Procedure	EDP
Executive Summaries	EXSUM
Explosive Ordnance Disposal	EOD
Extended Range Gun Munitions	ERGM
Extended Range Multi-Purpose	ERMP

Failure Modes, Effects, and Critical Analysis	FMECA
Fast Burst Reactor	FBR
Fast Fourier Transform	FFT
Federal Aviation Agency	FAA
Feet	Ft
Feet per Second	Ft/sec
Fiber Site Terminating Equipment	FSTE
Field Manual	FM
Field Mobile Measurement System	FMMS
Field of View	FOV
Fighter Wing	FW
Fighting Falcon Fighter Aircraft	F-16
File Transfer Protocol	FTP
Firebee Target Drone Aircraft	BQM-34
Flight Management System	FMS
Flight Safety Officer	FSO
Flight Termination System	FTS
Focused Lethality Munition	FLM
For Official Use Only	FOUO
Force Activity Designator	FAD
Foreign Disclosure Office	FDO
Foreign Military Sales	FMS
Four Dimensional Weather Modeling	4DWX
Fourier Transform Spectrometers	FTS
French counter measure system using smoke or aerosol grenade	GALIX
Frequency from 4 to 2 GHz or 7.5 to 15 cm wavelength	S-band
Frequency from 7 to 12.5 GHz or 2.5 to 4 cm wavelength	X-Band
Frequency from 8 to 4 GHz or 3.75 to 7.5 cm wavelength	C-Band
Frequency Modulation	FM
Future Combat Systems	FCS
Future Combat Systems Recovery and Maintenance Vehicle	FRMV
Galaxy Transport Aircraft	C-5A
Gamma Radiation Facility	GRF
General and Accounting	G & A
Geographic Information Systems	GIS
GIG - Enterprise Services	GIG-ES
Gigabyte per Second	Gbps
Giga Hertz	GHz
Giga Seconds	Gs
Global Information Grid	GIG
Global Positioning System	GPS
Global War on Terrorism	GWOT
Globemaster III Transport Aircraft	C-17
Government Series	GS
Graphite-Epoxy	GEM
Greenwich Mean Time	GMT
Ground Based Auto Destruct	GBAD
Ground Based Translator Processing System	GTP
Ground Control Station	GCS
Guided MLRS	GMLRS
Hardware in the Loop	HWIL
Harrier Marine Corps Aircraft	AV-8B
Hazardous Communication	HAZCOM

Hazardous Material	HM
Hazardous Test Area	HTA
Hazards of Electromagnetic Radiation to Fuel	HERF
Hazards of Electromagnetic Radiation to Ordnance	HERO
Hazards of Electromagnetic Radiation to Personnel	HERP
Head, Heart, Hands, Health	4-H
Headquarters, Department of Army	HQDA
High Assurance Internet Protocol Encryptor	HAIPE
High Definition	HD
High Energy Laser Systems Test Facility	HELSTF
High Mobility Artillery Rocket System	HMARS
High Mobility Multipurpose Wheeled Vehicle	HMMWV
High Powered Microwave	HPM
High Speed Digital Video	HSDV
Holloman Air Force Base	HAFB
Holloman High Speed Test Track	HSTT
Holloman Talon Aggressor Trainer Aircraft	AT-38B
Hornet Fighter Aircraft	F-18
Huey Multipurpose Helicopter	UH-1
Human Factors Engineering	HFE
Human Use Committee	HVC
Huron Transport Aircraft	C-12
Hydrogen Fluoride/ Deuterium Fluoride	HF/DF
Improved Mortar Ballistic Computer	IMBC
In Accordance With	IAW
Independent Verification and Validation	IV & V
Industrial Hygiene	IH
Inertial Measurement Unit	IMU
Inertial Navigation System	INS
Infantry Combat Vehicle	ICV
Information Assurance	IA
Information Operations Laboratory	IO Lab
Information System	IS
Information Technology	IT
Information, Ticketing, and Registration	ITR
Infra-Red	IR
In-Phase and Quadrature	I & Q
Instantaneous Impact Predictor	IIP
Instrumentation Radar Support Program	IRSP
Integrated Logistics Support	ILS
Integrated Meteorological System	IMETS
Integrated Range Control Center	IRCC
Integrated Training (and Testing) Area Management Program	ITAM
Integrated Weather Effects Decision Aid	IWEDA
Inter Range Instrumentation Group	IRIG
Intercontinental Ballistic Missile	ICBM
Interim Approval to Operate	IATO
Intermediate Frequency	IF
International Test Operations	ITOP
Internet Protocol	IP
Inter-Range Control Center	IRCC
Invitational Travel Orders	ITO
John Fitzgerald Kennedy	JFK
Joint Air-to-Surface Standoff Missile	JASSM

Joint Combat Identification Evaluation Team Single Integrated Air Picture Event 2002	JCIET02
Joint Direct Attack Munitions	JDAM
Joint Directed Energy Test Site	JDETS
Joint Interoperability Test Command	JITC
Joint Mobile Infrared Countermeasure Testing System	JMITS
Joint Tactical Ground Station	JTAGS
<b>K</b> ey Interface Profile	KIP
Key Performance Parameter	KPP
Kilo Feet	kFt
Kilo Joule	kJ
Kilo Meter	km
Kilo Rad	kRad
Kilo Volt	kV
Kilometer	Km
Kineto Tracking Mount	KTM
<b>L</b> arge Test Chamber	LTC
Large Vacuum Chamber	LVC
Laser Demonstration Device	LDD
Launch Area Theodolite Systems	LATS
Launch Complex	LC
Launch Complex 34	LC-34
Launch Complex 35 East	LC-35E
Launch Complex 35 North	LC-35N
Launch Complex 35 West	LC-35W
Launch Complex 36	LC-36
LC-37 Advanced Gun Munitions Test Site	Squirt Site
Letters of Agreement	LOA
Liaison Officer	LNO
Lieutenant Colonel	LTC
Lightning Map Array	LMA
Lightning Test Facility	LTF
Line of Sight	LOS
Linear Electron Accelerator	LINAC
Live, Virtual and Constructive	LVC
Local Area Network	LAN
<b>M</b> ajor Range and Test Facility Base	MRTFB
Manned Ground Vehicle	MGV
Man-Portable Air Defense System	MANPADS
Manpower and Personnel Integration	MANPRINT
Marine Corps Orders	MCO
Mark	MK
Martin Luther King	MLK
Master/Remote Ground Station	MRGS
Material Safety Data Sheet	MSDS
Materiel Test Directorate	MT
Meaconing, Intrusion, Jamming, or Interference	MIJI
Mean Sea Level	MSL
Medical Technical Bulletin	TB Med
Medical Vehicle – Evacuation	MV-E
Medical Vehicle – Treatment	MV-T
Mega Bytes	Mb
Mega Bytes per Second	Mb/s

Mega Electron Volt	MeV
Mega Hertz	MHz
Mega Watt	MW
Meteorology	Met
Meter	m
Micro Second	μs
Microsoft Project	MP
Mid-Infrared Advanced Chemical Laser	MIRACL
Miles per Hour	Mph
Military Operating Areas	MOA
Military Standards	MIL-STD
Minimum Support Plan	MSP
Missile Assembly Facility	MAF
Mission Playback Analysis and Reporting System	MPARS
Mission-Essential Task List	METL
Mobile Infrared Telescope	MIRT
Mobile Profiler Proof of Concept Measurement System	MMS
Mobile Telemetry System	MTS
Mobile Telemetry Van	MTV
Mobile Television Van	MTV
Model 4	M4
Modeling and Simulation	M & S
Morale, Welfare and Recreation	MWR
Mounted Combat System	MCS
Multifunction Utility/Logistics and Equipment Vehicle	MULE
Multimode Automatic Tracking Systems	MATS
Multiple Launch Rocket System	MLRS
Multiple Object Tracking Radars	MOTR
<b>N</b> ano Second	ns
National Aeronautics and Space Administration	NASA
National Environmental Laboratory Accreditation Program	NELAP
National Environmental Policy Act	NEPA
National Geospatial Intelligence Agency	NGIA
National Imagery and Mapping Agency	NIMA
National Institute of Standards and Technology	NIST
National Missile Defense - Ground Based Radar – Prototype	NMD-GBR-P
National Radar Cross Section Test Facility	NRTF
National Telecommunications and Information Administration	NTIA
NATO Seasparrow Missile	NSSM
Nautical Miles Squared	NM <sup>2</sup>
Navigation Test and Evaluation Laboratory	NAVTEL
Net-Centric Operations and Warfare Reference Model	NCOW RM
NetReady – KPP	NR-KPP
Network Operations	NetOps
Neutrons per Square Centimeter	n/cm <sup>2</sup>
New Mexico	NM
Non-Line-of-Sight	NLOS
Non-Line-of-Sight Cannon	NLOS-C
Non-Line-of-Sight Launch System	NLOS-LS
Non-Line-of-Sight Mortar	NLOS-M
Non-Return to Zero Level	NRZ-L
Non-Track Digital Instrumentation System	NTDIS
North Atlantic Treaty Organization	NATO
Northwest	NW
Not Later Than	NLT

Nuclear Dosimetry Laboratory	NDL
Object Oriented Coordinate System	OOCS
Official government organization contractors	Class A2
Official government organizations	Class A1
Open-Loop Tracking Complex	OLTC
Operational Incident Commander	OIC
Operational Navy Instruction	OPNAVINST
Operational Requirements	OR
Operational Test and Evaluation Facility	OTEF
Operations Other Than War	OOTW
Optical Maintenance Facility	OMF
Optics Remote Control and Acquisition	ORCA
Packets per Second	PPS
Pamphlet	PAM
PATRIOT Advanced Capability 3 Missile	PAC-3
Personal Computer	PC
Phantom Air Force Drone Aircraft	QF-4
Phantom Fighter Aircraft	F-4
Phased Array Tracking to Intercept of Target	PATRIOT
Physical Training	PT
Point-of-Contact	POC
Port Hueneme Division Naval Surface Warfare Center Detachment White Sands	PHDNSWC - WS
Portable Field Jamming System	PFJS
Portable Network Graphics	PNG
Post Exchange	PX
Precision Attack Missile	PAM
Precision Code Encrypted	P(Y)
Precision Guided Weapon	PGW
Private Branch Exchange	PBX
Program Executive Office Simulation, Training, and Instrumentation	PEO STRI
Program Introduction	PI
Project Facility Station	PFS
Project Manager – Night Vision/ Reconnaissance, Surveillance, and Target Acquisition	PM-NV/RSTA
Project Review and Assignment Team	PRAT
Pulse-Code Modulation	PCM
Pulsed Laser Vulnerability Test System	PLVTS
Pulses per Second	PPS
Quality Assurance Specialist Ammunition Surveillance	QASAS
Quality of Service	QoS
Radar Acquisition Display System	RADS
Radar Cross Section	RCS
Radar Target Scatter	RATSCAT
Radar Wind Profiler	RWP
Radiation Absorbed Dose	Rad
Radio Frequency	RF
Radio Frequency Authorization	RFA
Radio Frequency Countermeasure	RFCM
Range Applications Joint Program Office	RAJPO
Range Commanders Council	RCC
Range Control Center Facility Precision Acquisition System	RCCF PAS
Range Encryption Module	REM

Range Engineer	RO
Range Operations Directorate	RO
Range Safety Officer	RSO
RATSCAT Advanced Measurement System	RAMS
Real-time Data Processing System	RDTPS
Real-time Casualty Assessment	RTCA
Real-time Data Processing System	RTDPS
Real-time Four-Dimensional Data Assimilation	RTFDDA
Reconnaissance and Surveillance Vehicle	RSV
Record of Environmental Consideration	ROC
Redundant Array of Inexpensive Disks	RAID
Regulation	REG
Relativistic Electron Beam Accelerator	REBA
Relay and Recording Van	RRV
Reliability, Availability and Maintainability	RAM
Remote Data Acquisition System	RDAS
Remote Instrument Control System	RICS
Remote Launcher System	RLS
Request for Proposal	RFP
Requests for Test Services	RFTS
Research and Development	R & D
Research, Development, Test and Evaluation	RDT&E
Responsible Test Organization	RTO
Rolling Airframe Missile	RAM
Rough Order of Magnitude	ROM
Safety Assessment Report	SAR
Safety SOP	SSOP
SANDS Technical Data Center	STDC
Scanning Electron Microscopy	SEM
Sea Lite Beam Director	SLBD
Secret Internet Protocol Router Network	SIPRNet
Secure VDLS	SVDLS
Security Policy Automation Network	SPAN
Selected Stationary Coordinate System	SSCS
Semiconductor Test Laboratory	STL
Sensitive Compartmented Information	SCI
Service Level Agreement	SLA
Shaped Offset Quadrature Phase-Shift Keying	SOQPSK
Silicon	Si
Small Diameter Bomb	SDB
Small Test Chamber	STC
Small Unmanned Ground Vehicle	SUGV
Smart Impact Prediction System	SMART-IP
Smart Munitions/Smart Submunitions	SM/SSM
Software Test and Evaluation Panel	STEP
Solar Thermal Test Facility	STTF
Soldier, Operator, Maintainer, Test and Evaluation	SOMTE
SouthEast	SE
Space Transportation System	STS
Standard Definition	SD
Standard Definition Interface	SDI
Standard Frequency Action Format	SFAF
STANDARD Missile	SM
Standard Operating Procedure	SOP
Statement of Capability	SOC or SC

Strato-Fortress Bomber Aircraft	B-52
Super Saber Target Drone	QF-100
Surface Automated Measurement System	SAMS
Surface Miss Distance	SMD
Survivability, Lethality and Vulnerability	SLV
Survivability, Vulnerability & Assessment Directorate	SV
Survivability/Lethality Analysis Directorate	SLAD
System-of-systems integration	SOSI
Systems Engineering Directorate	SE
T & E Master Plan	TEMP
Tactical Air Navigation	TACAN
Talon Advanced Trainer Aircraft	AT-38
Talon Trainer Aircraft	T-38
Target Motion Resolution	TMR
Telemetry	TM
Telemetry Acquisition and Relay System	TARS
Telemetry Acquisition Systems	TTAS
Telemetry Data Center	TDC
Temperature Test Facility	TTF
Terminal High Altitude Area Defense System	THAADS
Test and Evaluation	T & E
Test Environment Certification Complex	TECC
Test Group Test Directorate	TGTD
Test Incident Report	TIR
Test Officer	TO
Test Operation Procedure	TOP
Test Schedule and Review Committee	TSARC
Test Support Network	TSN
Test Support Network - Internet Protocol	TSN-IP
Thermo-Luminescent Dosimeter	TLD
Three Dimensional	3-D
Time of Minimum Approach	TMA
Time Space Position Information	TSPI
Time-Division Multiplexed	TDM
Tomcat Fighter Aircraft	F-14
Tornado Royal Air Force (RAF) Aircraft	GR1
Toxicity Characteristic Leaching Procedure	TCLP
Training and Doctrine Command	TRADOC
Training and Doctrine Command Requirements Analysis Center	TRAC
Training Circular	TC
Training Readiness Authority	TRA
Transient Radiation Effects on Electronics	TREE
Translated GPS Ranging System	TGRS
Transmission Control Protocol	TCP
Transportable Range Augmentation and Control System	TRACS
Transportable Telemetry Acquisition and Relay System	TTARS
Transportable Telemetry System	TTS
Ultra High Frequency	UHF
Ultra Violet	UV
Unexploded Ordnance	UXO
United States	US
United States Marine Corp	USMC
United States Post Office	USPO
Universal Documentation System	UDS

Universal Power Supply	UPS
Universal Time Standard	UTS
Unmanned Aerial Systems	UAS
Unmanned Aerial Vehicles	UAV
Unmanned Ground Systems	UGS
Unmanned Ground Vehicles	UGV
US Army Garrison	USAG
USAG - Directorate Plans, Training, Mobility, Security	USAG-DPTMS
User Datagram Protocol	UDP
User Equipment	UE
<b>V</b> engeance (Vergeltungswaffe) Rocket	V-2
Versatile Tracking Mount	VTM
Vertical Angle	V-angle
Vertical Launch ASROC	VLA
Very High Frequency	VHF
Very Important Person	VIP
Vibration Control	VC
Video Home System	VHS
Video Indexing For Searching Over Networks	VISION
Video Instrument Control System	VICS
Video Teleconference	VTC
Virtual Private Network	VPN
Virtually Integrated System for Optical Replay	VISOR
VISION Digital Library	VDL
VISION Digital Library System	VDLS
Visual Information	VI
Volts Direct Current	VDC
<b>W</b> arhead Impact Target	WITs
West Center 50	WC-50
White Sands - National Range – Projects	STEWS-NR-P
White Sands Data Management	WSDM
White Sands Missile Range	WSMR
White Sands Missile Range, Plans and Operations, Business Development Office	TEDT-WS-CSPB
White Sands National Monument	WSNM
White Sands Range Frequency Management Office	TEDT-WST-DSSTR
White Sands Space Harbor	WSSH
White Sands Test Center	WSTC
White Sands Test Facility	WSTF
Wind Finder	WF
Work Days	WD
World Geodetic System	WGS
WSMR Regulation	WSMRR



# Index



586 <sup>th</sup> Flight Test Squadron	173
746 <sup>th</sup> Test Squadron - Central Inertial Guidance Test Facility (CIGTF)	169
846 <sup>th</sup> Test Squadron	170
<b>Acceleration Test Capabilities</b>	166
Acronyms	183
Advanced Range Data System (ARDS)	124
Aerial Cable Facilities	50
Aided Laser Tracking System (ALTS)	127
Air Force 46 <sup>th</sup> Test Group Detachment 1 (DET 1, 46 <sup>th</sup> TG)	55
Air Force 46 <sup>th</sup> Test Group Detachment 1 Appendix	169
Airspace Appendix	86
Airspace Policy	26
Altitude Chamber	162
Appendices	85
Applied Environments	48
Army and Air Force Exchange Service (AAFES)	81
Army Aviation Instrumentation	37
Army Navy Mobile Pulsed System (AN/FPS)-16 Instrumentation Tracking Radar	117
Army Navy Mobile Pulsed System (AN/MPS)-39 Multiple Object Tracking Radar	115
Army Research Laboratory (ARL)	62
At Home on the Range	73
Atmospheric Profiler Measurement System (APMS)	130
<b>Battlespace Real-Time Video (BRTV)</b>	128
<b>Center for Countermeasures</b>	63
Center for Countermeasures Appendix	174
Certification of Hazards	95
Chemistry Laboratory Appendix	167
Chemistry Laboratory	51
Client/Server Computer Services	176
Climatic Test Facilities Appendix	162
Climatic Test Facilities	48
Conditioning Equipment	163
Contact Information	2
Customer Transponders	122
CW Weibel Doppler Radar	119
<b>Data Acquisition Capabilities</b>	166
Data Analysis Systems Appendix	142
Data Analysis Systems	41
Data Capabilities	113
Data Collection Systems	32

Data Distribution Systems Appendix	135
Data Distribution Systems	38
Data Processing Capabilities	166
Data Product Categories	149
Data Products	133
Defense Threat Reduction Agency (DTRA)	61
Digital Enhanced Seeker Van (DESV)	174
Directed Energy Weapons Effects	46
Directed Energy Weapons Effects Appendix	161
Directions to White Sands Missile Range	66
Distant Object Attitude Measurement System (DOAMS)	126
Documentation	104
Doing Business with the Range	12
Dynamic Test Facilities	49
Dynamic Test Facilities Appendix	164
<b>E</b> lectromagnetic Environment Effects	44
Electronic Countermeasure Activities	107
Environmental Considerations Policy	19
Environmental Test Area II (ETA II)	162
Environmental Testing	170
Explosive Ordnance Disposal Appendix	105
<b>F</b> acilities and Laboratories	43
Fast Burst Reactor (FBR)	159
Field Instrumentation and Equipment	174
Financial Systems Appendix	109
Financial Systems	27
Fixed Camera System	127
Flight Restrictions	87
Flight Safety Appendix	96
Flight Safety Information Requirements	99
Flight Termination System Requirements	99
Flight Testing	169
Fog, Smoke, and Foam Generators	175
Four Dimensional Weather Modeling (4DWX)	131
Frequency Utilization and Management Communications	40
Frequency Utilization and Management Policy Appendix	106
Frequency Utilization and Management Policy	26
Functional Areas	174
<b>G</b> amma Radiation Facility (GRF)	160
General Policy	96
General Policy	86
Global Positioning System (GPS) Electronic Combat (EC) Testing	169
Global Positioning System (GPS) Small Box Configuration	124
Global Positioning Systems Instrumentation Appendix	124
Global Positioning Systems Instrumentation	34
GPS Receiver and Integrated System Testing	170
Ground Safety Appendix	95
<b>H</b> azardous Test Area (HTA)	146
High Energy Laser Systems Test Facility (HELSTF)	59
High Power Microwave Electromagnetic Environment Effects	47
High Power Microwave Facilities	46
Holloman High Speed Test Track (HSTT)	170
Hot Chamber	162
Human Factors Engineering (HFE)	41
Human Factors Engineering (HFE) Appendix	142
<b>I</b> mmersion Tank	163

Impact Areas	146
Index	205
Information System (IS)	176
Installation Hours of Operation	71
Instrumentation Capabilities	166
Interfacing With the Range	11
Internet Access	81
Inter-Range Control Center (IRCC)	135
Introduction to the Range	1
Joint Mobile Infrared Countermeasure Testing System (JMITS)	175
Kineto Tracking Mount (KTM)	174
Laboratory Testing	170
Land, Airspace, and Geographical Infrastructure	6
Large Test Chamber (LTC)	162
Laser Facilities	46
Laser Facilities	161
Laser Laboratory Facilities	175
Laser Safety Appendix	103
Launch Area Theodolite System (LATS)	126
Life Cycle Management	48
Lightning Map Array (LMA)	131
Linear Electron Accelerator (LINAC)	159
Load Testing and Center Of Gravity Test Capabilities	166
Manpower and Personnel Integration (MANPRINT)	41
Manpower and Personnel Integration (MANPRINT)	142
Metallurgy Laboratory	50
Meteorology Instrumentation Appendix	130
Meteorology Instrumentation	35
Methodology	174
Millimeter Wave Electronic Countermeasure (ECM) Threat Simulator	175
Millimeter Wave Laboratory (MMW)	175
Mission Execution on the Range	31
Mission Planning on the Range	17
Mission Statement	6
Mobile Infrared Telescope (MIRT)	128
Mobile Range Instrumentation	36
Mobile Television Vans (MTV)	127
Morale, Welfare and Recreation (MWR)	74
Morale, Welfare and Recreation Appendix	177
Multimode Automatic Tracking System (MATS)	126
Multiple Object Tracking Radar (MOTR) System Description	115
National Aeronautics and Space Administration (NASA)	58
National Geospatial Intelligence Agency (NGA)	64
National Radar Cross Section Test Facility	172
Netcentric Communications	38
Network Communications	40
Non-Track and Closed Circuit Television	127
Notes	181
Nuclear Weapons Effects Facilities Appendix	159
Nuclear Weapons Effects	43
Optical Instrumentation Appendix	126
Optical Instrumentation	34
Optics Remote Control and Acquisition (ORCA)	128
Overview of the Range	5

Port Hueneme Divn Naval Surface Warfare Center Detachment White Sands (PHDNSWC-WS)	53
Post Test Data Reduction Appendix	149
Post Test Data Reduction	42
Process Authorization	106
Production Services	176
Program Executive Office Integration (PEO-I) Army Brigade Combat Team (BCT) Modernization	57
Program Portfolio	3
Program Support	148
Propulsion Test Capabilities	166
Pulsed Laser Vulnerability Test System (PLVTS)	161
Pyrotechnics	175
<b>Radar Instrumentation</b>	33
Radar Systems Instrumentation Appendix	115
Radar Transponders	122
Radiation Tolerance Assured Supply and Support Center	48
Radio Communications	39
Radiometric Support	175
Range Operations Mission Scheduling Policy	22
Range Organizational Structure	9
Range Policy	18
Real-Time Safety Management Tracking	98
Reference Systems	169
References	179
Relativistic Electron Beam Accelerator (REBA)	159
Reliability, Availability and Maintainability (RAM)	41
Reliability, Availability and Maintainability (RAM) Appendix	142
Remote Instrument Control System (RICS)	126
Remote Launcher System	174
Request for Test Services (RFTS)	109
Resource Management Policy	27
Reverse Acronyms	193
<b>Safety Aspects of Impact Area</b>	148
Safety Policies and Approvals	96
Safety Policy	20
Safety Standing Operating Procedure (SSOP)	95
Salt Fog/Humidity Chamber	162
Semiconductor Test Laboratory (STL)	160
Shock Test Capabilities	165
Sled Testing	169
Small Test Chamber (STC)	162
Smart Impact Prediction System (SMART-IP)	132
Smoking Policy	72
Software Engineering	145
Software Test and Analysis	144
Sources	175
Space Effects	47
Sponsor Organizations	13
Surface Automated Measurement System (SAMS)	130
System Engineering	145
System Safety Evaluations	143
<b>Target Control Instrumentation</b>	37
Team White Sands Missile Range (Team WSMR)	53
Telemetry Data Center	113
Telemetry Instrumentation	32
Telemetry Systems Appendix	113
Telephone	82
Telephonic Communications	39

Test Support Network (TSN)	170
Test Support Network-Internet Protocol (TSP-IN)	137
Timing Instrumentation	34
Timing Instrumentation Appendix	125
Training and Doctrine Command (TRADOC) Requirements Analysis Center (TRAC)	59
Training Missions Appendix	89
Transponder Instrumentation	34
Transponders Instrumentation Appendix	122
<b>U</b> nexploded Ordnance (UXO)	70
United States Post Office	81
Universal Documentation System	18
Upper Air Measurement System (UAMS)	130
<b>V</b> ersatile Tracking Mount (VTM)	126
Vibration Test Capabilities	164
Video Instrument Control System (VICS)	126
Video Relay Capability	127
Virtually Integrated System for Optical Replay (VISOR)	129
Vision Digital Library System (VDLS)	109
Visit Requests	68
Visiting the Range	65
Visual Information (VI) Products Appendix	157
Visual Information Products	43
<b>W</b> arheads Engineering and Assessment Section	148
Warheads	42
White Sands Missile Range Main Post Area Map	84
White Sands Solar Furnace (WSSF)	160
Wind Finding Radar (WFR)	132



Approved for public release;  
Distribution is unlimited;  
OPSEC review conducted on Dec 2009



US Army  
White Sands Missile Range  
Range Customer Handbook 2010  
WSMR Business Development Office  
TeamWhiteSands@us.army.mil  
[www.wsmr.army.mil](http://www.wsmr.army.mil)  
866-532-9767